


Sunfire™

Theater Grand Receiver

TGR-3 and TGR-3(E)

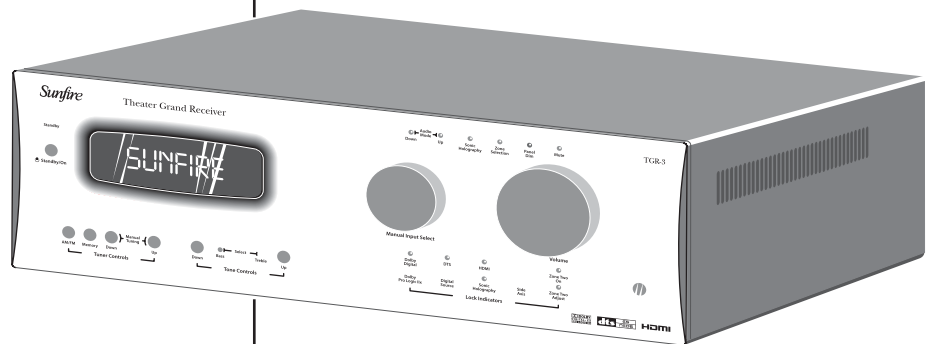


DOLBY
DIGITAL-EX
PRO LOGIC IIx

dts
ES
NEOS

HDMI

User's Manual



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure, that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Important Safety Instructions

1. Read Instructions
2. Keep these Instructions
3. Heed all Warnings.
4. Follow all Instructions
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
8. Unplug this apparatus during lightning storms or when unused for long periods of time.
9. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as a power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
10. **Ventilation** — The apparatus should be situated so that its location or position does not interfere with its proper ventilation. For example, the apparatus should not be situated on a bed, sofa, rug, or similar surface that may block any ventilation openings; or placed in a built-in installation such as a bookcase, cabinet, or closed equipment rack that may impede the flow of air through ventilation openings.
11. **Power Sources** — The apparatus should be connected to a power supply only of the type described in these operation instructions or as marked on the apparatus.
12. **Power Cord Protection** — Power-supply cords should be routed so that they are not likely to be walked upon or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit the apparatus.
13. **Non-use Periods**—The power cord of the apparatus should be unplugged from the outlet when unused for a long period of time.
14. **Object and Liquid Entry** — Care should be taken so that objects do not fall into and liquids are not spilled into the inside of the apparatus.
15. **Servicing** — The user should not attempt to service the apparatus beyond those means described in this operating manual. All other servicing should be referred to qualified service personnel.

PORTABLE CART WARNING



Carts and stands - The Component should be used only with a cart or stand that is recommended by the manufacturer. A Component and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the Component and cart combination to overturn.





SAFETY

16. To prevent electric shock, do not use this polarized plug with an extension cord, receptacle or other outlet unless the blades can be fully inserted to prevent blade exposure.

Pour prévenir les chocs électriques ne pas utiliser cette fiche polarisée avec un prolongateur, un prise de courant ou une autre sortie de courant, sauf si les lames peuvent être insérées à fond sans laisser aucune partie à découvert.

17. Grounding or Polarization — Precautions should be taken so that the grounding or polarization means of the Component is not defeated.

This apparatus does not exceed the Class A/Class B (whichever is applicable) limits for radio noise emissions from digital apparatus as set out in the radio interference regulations of the Canadian Department of Communications.


ATTENTION — Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de class A/de class B (selon le cas) prescrites dans le règlement sur le brouillage radioélectrique édicté par les ministere des communications du Canada.

WARNING – TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

CAUTION: TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

ATTENTION: POUR ÉVITER LES CHOCS ÉLECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA BORNE CORRESPONDANTE DE LA PRISE ET POUSSER JUSQU'AU FOND.

EXAMPLE OF ANTENNA GROUNDING ACCORDING TO NATIONAL ELECTRICAL CODE INSTRUCTIONS CONTAINED IN ARTICLE 810—"RADIO AND TELEVISION EQUIPMENT"

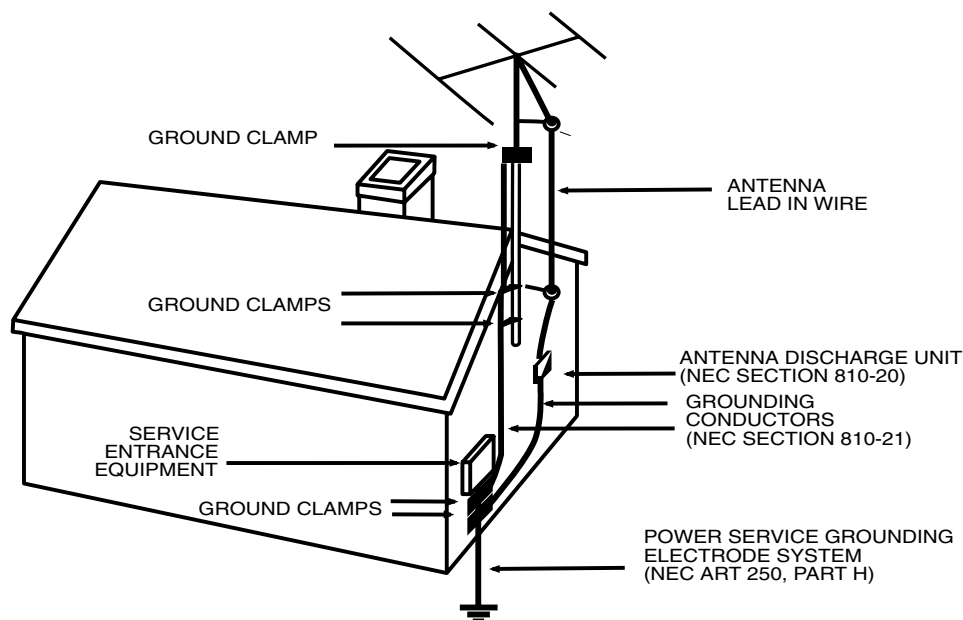

NEC NATIONAL ELECTRICAL CODE.

NOTE TO CATV INSTALLER

This reminder is to call the CATV system installer's attention to Article 820-40 of the NEC that provides guidelines for proper grounding and in particular, specifies that the cable ground shall be connected to the grounding system of the building as close to the point of cable entry as practical.

OUTSIDE ANTENNA GROUNDING

If an outside antenna is connected to the receiver, be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the lead-in wire to an antenna-discharge unit, connection to grounding electrodes, and requirements for the grounding electrode. See Figure above.



Contents

	Important Safety Instructions	2-3
	Chapter 1: Introduction	5
	Unpacking and Features	6
	Overview.....	7
	Quick Start Guide	8
	Front Panel Features.....	10
	Rear Panel Features	12
	Installation	14
	Chapter 2: System Configurations	15
	Chapter 3: Remote Control	25
	Chapter 4: On Screen Display	30
	Speaker Calibration	40
	Chapter 5: Using the TGR-3	42
	Bass Management.....	42
	Surround Modes	43
	Tuner Operation	45
	Recording	46
	Zone 2 Operation.....	47
	Sonic Holography	48
	CD Software Upgrade	48
	Appendix:	
	Speaker Placement	49
	The RS-232 Port.....	51
	Troubleshooting Guide	52
	Remote Control Codes.....	55
	Favorite Settings.....	57
	Specifications	58
	Limited Warranty	59
	Service Assistance	59

Read the **Safety Instructions** carefully before connecting and using your Sunfire Theater Grand Receiver TGR-3.

Chapter 1 is a general introduction to the features, details and installation of your TGR-3.

Chapter 2 shows many options for connecting your source equipment to the TGR-3.

Chapter 3 describes the details and operation of the advanced remote control.

Chapter 4 shows the various menus of the On Screen Display, and how to adjust and customize your TGR-3.

Chapter 5 describes the available modes, options and operational details of the TGR-3.

The Appendix shows some additional information, including a troubleshooting guide, the Warranty and service assistance details

To find out more about this and other Sunfire products, please visit our website: **www.sunfire.com**



Introduction

Sunfire



Bob Carver, Audio Designer, Physicist

Dear Friend,

Thank you for purchasing a Sunfire Theater Grand Receiver TGR-3. We hope that you enjoy it and the music it makes as much as we have enjoyed creating it for you.

As with our entire line of Sunfire products, the TGR-3 is brimming with exclusive, high-performance technology that will help you get the highest level of enjoyment from your Home Theater system. These include:

- 7 channels of power amplification
- 200 watts rms per channel, (8 ohms, < 0.5% THD)
- High quality digital signal processor supports sampling rates up to 96 kHz
- Dolby® Digital EX™, Dolby® Pro Logic® II, and Dolby® Pro Logic® IIx processing
- DTS® ES™ and DTS® Neo:6™ processing
- FM/AM tuner with 40 station presets, and active dynamic FM noise reduction
- DSP Holographic Imaging, which gives a greatly enhanced soundstage
- Automatic 5.1, 6.1 and 7.1 channel mode selection
- Balanced audio outputs
- Two Zone operation
- Pre-programmed and learning LCD remote control

The TGR-3 lets you run all of your audio and video components from a single easy-to-use control center. So you can experience the extraordinary, dynamic, full-range, multidimensional, wall-to-wall Theater sound.

Bob Carver



Unpacking

Your TGR-3 should reach you in perfect condition. If you do notice any shipping damage, please contact your Sunfire Dealer immediately.

Gently lift out the unit and remove all the packing material and accessories. It is important to save all the packing materials and the box in case your TGR-3 ever needs to be moved or shipped for repair.

Make sure that you keep your sales receipt. It is the only way to establish the duration of your Limited Warranty and it may come in useful for insurance purposes.

Please take a moment to fill out and mail the Sunfire Customer Response card. Also read the serial number located on the rear panel, and record it here:

Serial #:

Purchased at:

Date:

Features

- **7 channels of power amplification**
- **200 watts rms per channel (8 ohms, < 0.5% THD)**
- **Automatic video format transcoder upconverts video sources to S and component video**
- **Dolby Digital EX, Dolby Pro Logic IIx, DTS ES and DTS Neo:6 decoding modes**
- **DSP Sonic Holography for unbelievable soundstage enhancement**
- **7.1 channel outputs plus stereo side outputs for a total of 9.1 channels**
- **Three component video inputs and two component video outputs**
- **Two HDMI inputs and one HDMI output**
- **Party mode allows two channel playback through all speakers**
- **AM/FM tuner with 40 presets**
- **Flash memory upgradable through RS232 or CD**
- Second zone can play sources independent of the main zone
- Surround Back speaker outputs may be used for a second zone or for side axis speakers
- Six A/V inputs, each with audio, S-video and composite video
- Three A/V outputs, each with audio, S-video and composite video
- Three audio-only inputs, including MM Phono
- 8 channel analog input with separate RCA connectors
- On screen display (OSD)
- Two Tape record outputs
- Six coaxial and four optical digital inputs
- Treble and Bass tone controls
- RS-232 port with discrete codes
- Ethernet connection
- Trigger outputs for both zones
- IR control of both zones, with rear IR ports and discrete codes.
- Supports all digital sampling rates to 96 kHz
- 24-bit Crystal Semiconductor® Analog to Digital converter
- 24-bit, 192 kHz Analog Devices® Digital to Analog converters
- 32-bit, 20 MHz control microprocessor and 24-bit, 150 MIPS Motorola Symphony™ DSP processor
- DSP “simulated” surround mode for two channel sources
- Gold plated inputs and outputs
- Can record a downmixed 2 channel output from a 5.1 digital source
- Direct 2-channel analog bypass mode
- Three subwoofer outputs
- IEC removable power cord
- Steel chassis with thick, milled aluminum faceplate

Remote Features

- Fully backlit
- Pre-programmed for most brands of A/V equipment
- Learns commands from your other remote controls
- Macro feature lets you program a sequence of control steps
- Operates up to ten components
- Does not lose programming memory when changing batteries



Overview

Most features of the TGR-3 can be operated by the remote control's Receiver (RECVR) section.

For the best Home Theater performance, you should calibrate your speakers and customize the TGR-3 settings for your system. Press the MENU button on the remote control to activate the On Screen Display (OSD). This has several menus which will allow you to set up your speakers and calibrate your system correctly.

The remote can also be used to activate and control all features of the second zone.

The TGR-3 (E) is the export model, set for 220-240 VAC operation. Its operation is identical to the TGR-3 described in this manual.

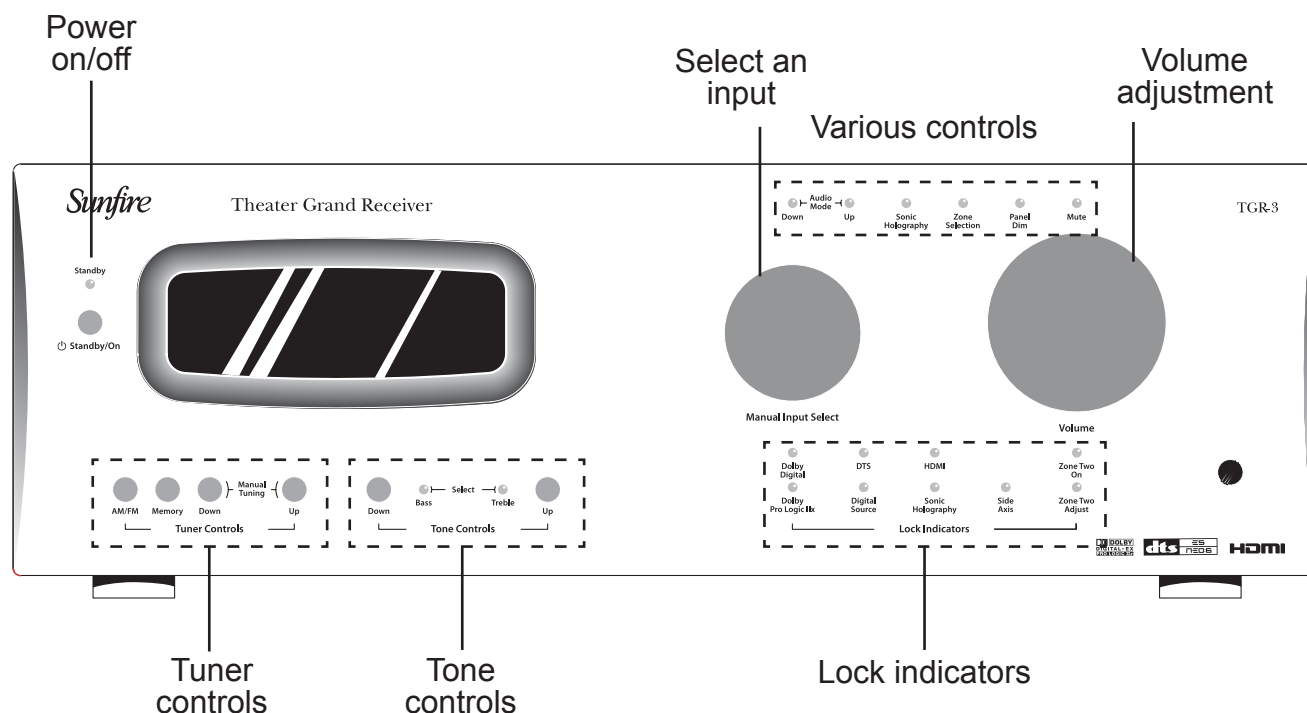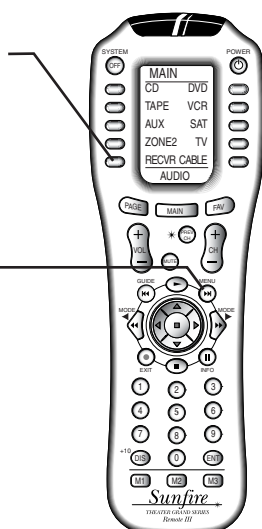



Quick Start Guide

We hope that the following details will help you get started using your TGR-3.

1. Take care to read and follow the safety instructions on pages 2-3. Also make sure that you read the notes and details throughout the manual, especially notes marked with a warning triangle (⚠).
2. Add batteries to the remote control.
3. Connect your source equipment and speakers to the TGR-3. See the hookups on pages 15-24.

⚠ Make sure that all of your equipment remains unplugged from the AC mains until you have made all the connections.


4. In your DVD player's Audio setup menu, set the digital output to **BITSTREAM**. If this is not set correctly, the TGR-3 cannot decode the digital information for 5.1 surround sound playback.
5. The TGR-3 has a bass management system which allows the bass from each speaker to be redirected to a subwoofer. Larger speakers can play the full frequency range, and smaller speakers such as satellite types can have their bass redirected. See page 42 for details.

Make a note of which speakers you would like to play the full frequency range (Large) and those which will have the bass redirected (Small). Also make a note of the approximate distance of each speaker from your listening position.

6. The surround back speaker outputs can be used for powering surround back, side-axis, or Zone 2 speakers. See page 41
7. Turn on the TGR-3, and then turn on your TV and source equipment.

8. Press the remote MAIN button a few times to make sure you are on the Main Menu in the remote's display.

9. Set the remote to operate the TGR-3 by pressing this button.

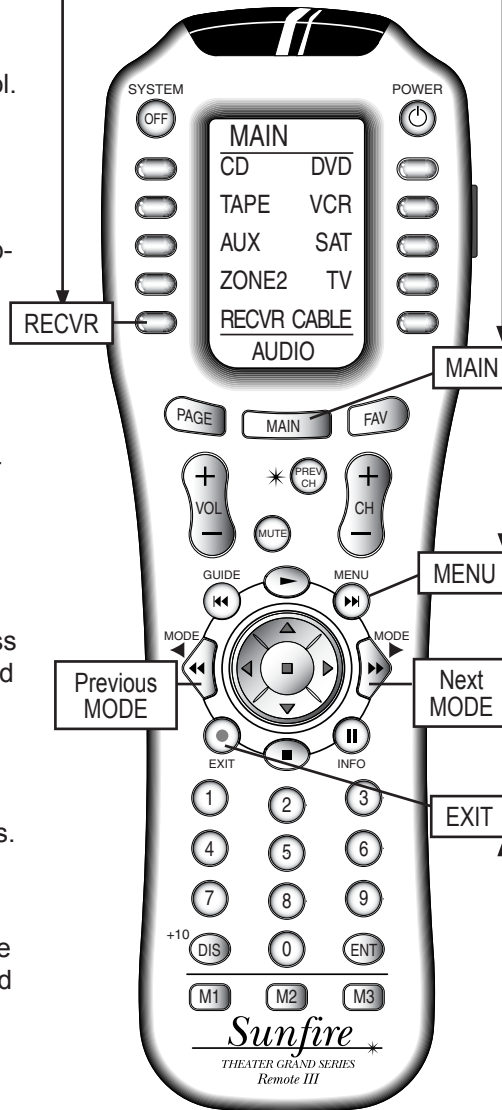


13. The TGR-3 now needs to be setup correctly to suit your speakers and system. The following On Screen Display (OSD) menus are used to enter and make three main adjustments:


- Speaker Size
- Speaker Calibration
- Speaker Position

This setup needs to be done when you use your system for the first time, or if you change anything such as the amplifiers or speakers, or the speaker position. The calibration is also a good way to check that your system is working correctly. These adjustments are made using the OSD as follows:

- 13.1 Press MENU on the remote to bring up the MAIN Menu of the OSD on your TV.



- 13.2 Use the joystick pad left, right, up and down buttons to navigate through the menus in the next steps.



NOTE: you can quit the OSD at any time by pressing EXIT on the remote. Any changes you make will be saved. There is no need to navigate back through previous pages, unless you want to make more changes.

When the OSD is active, the TGR-3 front panel display shows an abbreviated message of where you currently are in the menus.


10. Turn down the TGR-3 volume and use the remote or front panel input selector to select a video source.

11. Play a source, such as a DVD, and bring up the volume to suit your taste. Make sure the video can be seen in the TV monitor.


12. Stop or pause the source.



- 13.3 In the MAIN Menu, select the SETTINGS Menu, and then the SPEAKERS Menu.

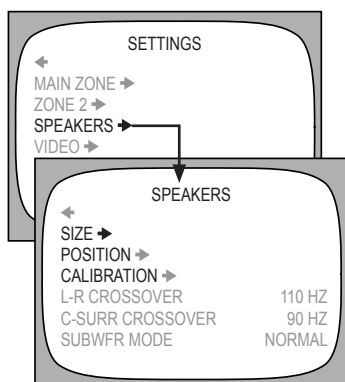


- 13.4 In the SPEAKERS Menu, select the SIZE Menu.




Use the joystick pad to set the size of each speaker to Small or Large, or set to OFF for those speakers which are not present. Return to the SPEAKERS Menu when you are finished.

- 13.5 In the SPEAKERS Menu, select the SPEAKER POSITION Menu.



Enter how far each speaker is from your listening position. You can measure it with a tape, or do a visual estimation.

- 13.6 In the SPEAKERS Menu, select the CALIBRATION Menu to adjust the output of each speaker. A test noise plays in each selected speaker, and you use the remote to adjust the volume of each speaker until they are all playing at the same level. Return to the SPEAKERS Menu when you are finished.

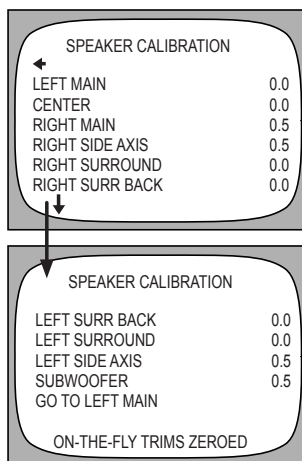

- 13.7 Press the remote's EXIT button to quit the On Screen Display. Now the TGR-3 is setup correctly and ready for action.

14. If you play a Dolby Digital or DTS encoded source, the TGR-3 will automatically select the correct surround mode. If it is a 2-channel source, you can select a surround mode using the remote's MODE buttons or from the front panel.

15. The TGR-3 has many more options which are described in further detail in the OSD menu section on page 30. These options will help you customize the TGR-3 to suit your tastes. You can do this after you have used the TGR-3 for a while and have a better idea of how you would like to customize your system.

17. Enjoy your new TGR-3. It will allow you to listen to many great and wonderful performances, from Big Band 78s in surround sound, to the latest space-action blockbuster with up to nine speakers and a subwoofer fully engaged.


Further Information

For more details, see the following pages of the manual:

Remote Control:	Page 25
On Screen Display:	Page 30
Speaker Size:	Page 38
Speaker Position:	Page 39
Speaker Calibration:	Page 40
Bass Management:	Page 42
Surround Modes:	Page 43



Front Panel Features

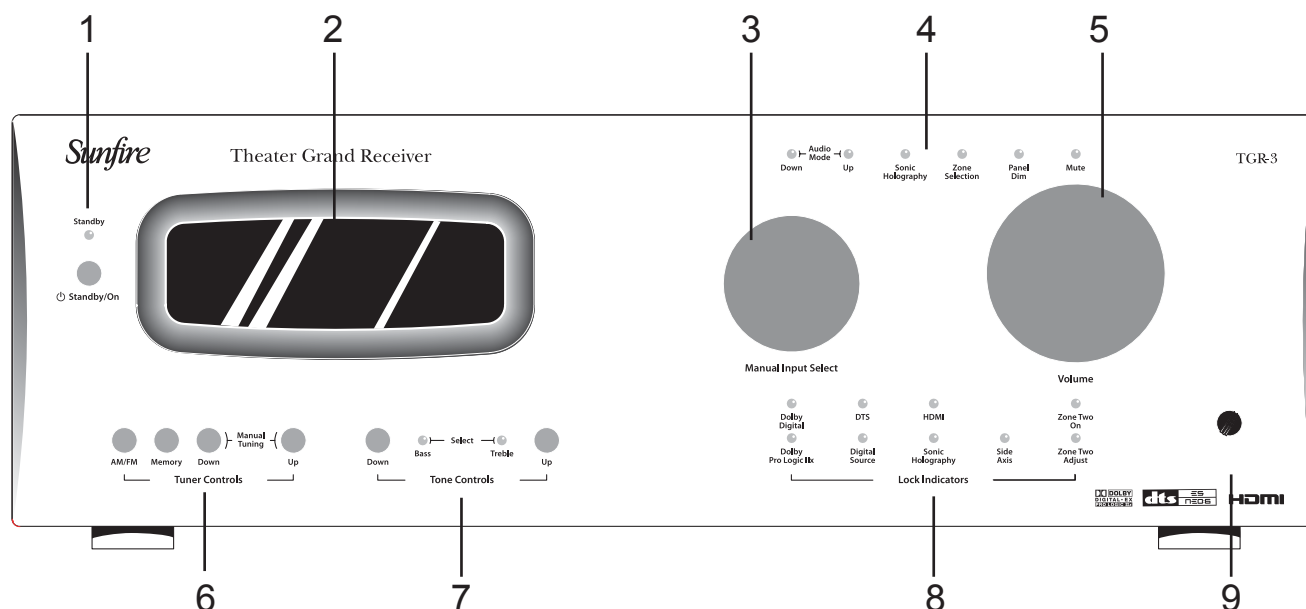

1. Power

This button turns the TGR-3 on (fully powered up) or into Standby mode (asleep, but can be turned on remotely).

If you press ZONE TWO first, it can turn on Zone 2 (even if the Main Zone is off).

The red Standby LED is on when the TGR-3 is in Standby mode. When the TGR-3 is turned on, the LED will go out.

To fully turn off power to the TGR-3, for example if you are going on vacation to Boise for a week or two, then use the rear panel power switch.

2. Display

This soothing display shows which input is selected, the tuner frequency, volume level, and other useful features.

3. Manual Input Selector

Use this control to select the source you want to listen to.

Note: After you have selected an input, you should check that the TGR-3 is set to the desired surround mode (or the stereo mode).

Using the On Screen Display (OSD) INPUTS menu, each input can be adjusted in level so that all the inputs have similar volumes. Each input can also be set to enter a desired surround mode whenever that input is selected.

4. Mode Buttons

MODE UP/DOWN

These buttons allow you to step up or down through the various sound playback modes.

SONIC HOLOGRAPHY

Engage this to add a three dimensional effect, especially to stereo listening.

ZONE SELECTION

Use this to select either the main zone, or zone 2 to be adjusted.

Note: If Zone 2 has not been enabled (see page 36) this button has no effect.

Any changes you make after pressing this, will affect the selected zone. For example, press this and POWER to turn on Zone 2, then adjust the Volume and select an input. Press ZONE 2 again to revert back to Main Zone operation. It will also revert back after a short period of no activity.

PANEL DIM

The front panel lights have four levels: bright, medium, low and off (low intensity display with LEDs off).

MUTE

This turns off the sound. Press it again, or adjust the volume control to return to the previous volume level.



Front Panel Features

5. Volume

Rotate this manual control clockwise to increase the volume. The dB level will appear in the front panel display. Note that the control knob does not rotate when the remote is used. When turning on a new source, make sure the level is low, such as 20, and increase it slowly.

Note: When the TGR-3 is turned on, it has a deliberately slow and smooth volume ramp from silence, up to the level that was set when the unit was last turned off. It can also be set to come up to a preset volume you can select, rather than the previous volume.

6. Tuner Controls

AM/FM

This button toggles between the AM or FM band. Press and hold it to engage a scan of the station presets. Press it again to stop the scan.

MEMORY

Use this to store the current station as an easily-recalled preset.

UP/DOWN

Switch to stations above or below the frequency of the current station. If repeatedly pressed, the tuner will move up or down one frequency step each time. If held down for a second or more, the tuner will automatically keep tuning stations. Press UP or DOWN once again to stop when it reaches a station you like.

Tuning example:

1. Navigate to your favorite rock-a-billy-surfing-hip-hop-classics station with the UP/DOWN buttons.
2. Press MEMORY once. The preset choice will go to the next available one.
3. Within 5 seconds, press MEMORY again to save the current frequency as a preset, or else use the UP/DOWN buttons to find another preset number, then press MEMORY to save it.
4. The UP/DOWN buttons usually tune the frequency but when loading the presets, they navigate the presets.

7. Tone Controls

To change the tone, first press BASS or TREBLE and then press UP or DOWN to suit your taste. The display will show the change in dB level for reference. The range for both BASS and TREBLE is +/- 10 dB in steps of 1 dB.

Note: The Tone controls do not affect the LFE channel, or the 8-Channel analog input

The unit returns to its normal display after a few moments of inactivity, and any level changes are retained.

The BASS and TREBLE levels can also be adjusted using the OSD TONE Menu and the remote control.

8. Lock Indicators

DOLBY DIGITAL

This light is on when a Dolby Digital signal is being decoded.

DTS

This light is on when a DTS signal is being decoded.

HDMI

This is on when the HDMI connections are in use.

DOLBY PRO LOGIC IIx

This light is on when the Dolby Pro Logic IIx mode, or Dolby Pro Logic II mode is engaged.

DIGITAL SOURCE

This light is on when a Digital signal is being decoded.

SONIC HOLOGRAPHY

This light is on when the HOLOGRAPHIC IMAGE "circuit" is engaged. (This is actually modeled in DSP).

SIDE AXIS

This light is on when the side axis outputs are enabled.

ZONE TWO ON

This light is on when Zone 2 is turned on.

ZONE TWO ADJUST


This light is on when Zone 2 is being adjusted.

9. IR Receiver Window

This window should be clean and free from obstruction for the remote control to work correctly.



Rear Panel Features

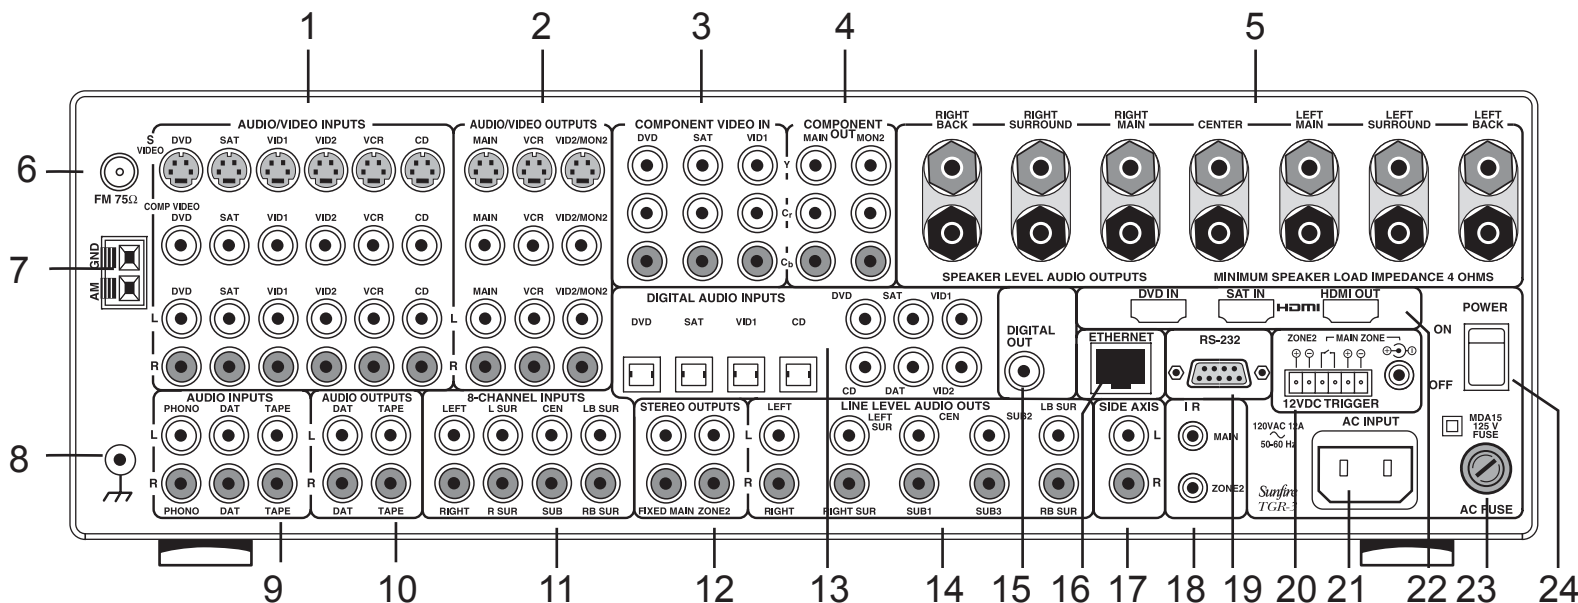

1. Audio/Video Inputs

These audio, composite-video and S-video inputs connect to the outputs of your audio video components. When these inputs are selected, the audio will be heard in your system, and the video will be seen on the TV screen. VID2 can be used for a second VCR.

2. Audio/Video Outputs

MAIN: connects to the inputs of a TV monitor, where the video of any selected input and the On Screen Display (OSD) can be viewed. The audio connections allow you to listen to any selected audio source through your TV's speakers.

VCR: connects to the inputs of a VCR to allow recording.

VID2/MON2: connects to the input of a second VCR for recording, or to a second TV. When configured in the OSD for "VID2," this output is muted whenever the VID1 input is selected. This prevents feedback; also there is no OSD then on this output. When configured for "MON2," the output is always active, the same as the Main output.

Note: Analog audio signals are present at these L and R outputs even if a digital input has been selected. The output is a 2 channel downmix if the digital source is more than 2 channels.

3. Component Video In

These inputs connect to the component-video outputs of your DVD, SAT or other video source (VID1) if they have this advanced capability. When these inputs are selected, the TGR-3 will automatically route any video signals going into these jacks to the component video outputs. Note that component video provides the best picture compared to composite or S-video. The TGR-3 can also switch HDTV signals.

4. Component Video Out

If your TV Monitor has component video inputs, connect them to these outputs. If you select DVD, SAT or VID1, then any video signals going to the component inputs will pass through to your TV monitor. The TGR-3 can also up-convert composite video and S-video from the other inputs.

5. Speaker-level Outputs

These speaker-level audio outputs connect to the inputs of your speakers. The outputs are: front left, front right, center, left surround, and right surround. The outer two outputs can be assigned as surround back outputs, Zone 2 outputs or side-axis outputs, see page 41 for details.

6. FM Antenna

The supplied FM antenna fits this "F-type" screw-on connector. Other antennas can be fitted for improved reception.

7. AM Antenna

These connections are for the included AM loop antenna.

8. Ground Screw

This is commonly used for the ground connection wire of a turntable, to prevent any hum in your speakers. It is tied to the chassis ground, and may be used as needed.

Note: It is not necessary or desirable to connect this to an electrical ground.



9. Audio Inputs

These audio inputs connect to the outputs of your turntable, DAT or TAPE player. Any standard audio component with a line-level output can be connected to DAT or TAPE. Only a turntable with a moving-magnet, or high-output moving-coil cartridge can be connected to the PHONO input.

10. Audio Outputs

These audio outputs connect to the analog record inputs of your tape decks, such as DAT, cassette or reel to reel. These outputs allow you to record the selected audio program. Note that these also allow analog recording from digital audio sources.

11. 8-CH Input

These analog audio inputs can connect to the output of an external surround processor, or a source component such as DVD-Audio, SACD, or a DVD player with its own surround decoder. You can select this as an input from the front panel or remote control. The eight channels of analog audio will then pass into the TGR-3.

Note: This is designed to be a very short analog-only signal path. DSP-based effects such as tone controls, bass management and DSP surround are bypassed. This input is not available in Zone 2.

12. Stereo Outputs

FIXED MAIN is a line-level output, and the volume is not adjustable. This can be used as a record output, or to feed another audio system.

ZONE 2 connects to the inputs of a stereo amplifier to run Zone 2. The volume and source are adjustable, either from the front panel, or from a remote IR sensor.

13. Digital Inputs

These inputs connect to the digital outputs of your audio/video components. The DVD, SAT and VID1 and CD inputs have two options, optical or coaxial. The DAT and VID2 inputs are coaxial only.

Whenever one of these inputs is selected from the front panel or remote, the TGR-3 will automatically select the digital input if there is a signal present, otherwise it will select the corresponding analog input.

14. Main Audio Outputs

These line-level RCA outputs connect to the inputs of your amplifiers and powered subwoofer(s). There are outputs for front left, front right, center, left surround, left surround back, right surround back, right surround and three identical subwoofer (LFE) outputs.

15. Digital Output

This S/PDIF output is active for all sources except the 8-channel input. It allows you to record digital audio, for example to a DAT or CD-R.

16. Ethernet Port

See page 51 for details.

17. Side-Axis Outputs

These outputs provide two optional front side channels to complement the left, center, right, surround and surround back channels. They can be turned on or off using the Speaker Size OSD menu (see page 38).

18. Infrared (IR) Inputs

These are used in custom installations to control the Main Zone and Zone 2 from a remote location. The input accepts 1/8" mono mini-jacks from standard remote control IR equipment, such as

those made by Xantech and other companies. The remote sensors can be in a different room, or your main room.

19. RS-232 Port

See page 51 for details.

20. Triggers and Relay

See the next page for details.

21. IEC Linecord Socket

The TGR-3 comes with a detachable linecord which connects here.

Plug the linecord into an AC wall socket or power strip that is correctly configured with the voltage specified for your model.

22. HDMI

Use these to connect any HDMI components you may have in your system. Two are inputs, and one is an output to your HDMI-equipped TV. No TGR-3 on screen display or audio decoding inside the TGR-3 is available from the HDMI inputs. Always connect a separate digital audio input cable when using HDMI.

23. AC Line Fuse



Always unplug the linecord from the AC Mains before checking or changing the fuse. Use a Screwdriver and gently twist off the fuse holder.

If this fuse blows, you must replace it with a fuse of exactly the same size and current rating.

24. Power Switch

If this is switched off, the TGR-3 will be off, and cannot be turned on, even with the front panel power switch.

In normal operation, leave this switch on. Turn it off if you will not be using the TGR-3 for extended periods.



Installation

Observe the following precautions when choosing a location for your TGR-3:



- Make sure the Receiver has good ventilation. Do not cover any of the ventilation slots, or fit the receiver inside a sealed cabinet without good air flow.
- Protect it from prolonged exposure to direct sunlight and other direct sources of heat, such as heating vents and radiators.
- Do not expose the unit to rain or moisture. If fluid or a foreign object should enter the unit, immediately turn off the power and contact your Sunfire Dealer.
- Avoid excessive exposure to extreme cold or dust.
- Do not place heavy objects on top of the unit.

AC Power Considerations

Ensure that the unit is plugged into an outlet capable of supplying the correct voltage specified for your model.

Care

If you need to clean the front surface, first turn off the power and then use a soft dry cloth, rubbing with the grain. Be careful not to scratch the display window.

Connection Tips

Before setting up your new system, please consider the following :



- Always make sure that your components are all turned OFF, or unplugged before making or changing any connections.
- Whenever possible, route the power cords away from the signal cables or speaker wires

to prevent any hum or interference heard in the speakers.

- Choose reliable hookup cables. They should be fully shielded and as short as possible.
- Use quality coaxial digital cables to connect the TGR-3 to any source equipment which has coaxial digital outputs.
- Some patch cords can be a very tight fit and there is usually a preferred method of getting them off. Some have to be removed with a twisting action. Be gentle or you may damage the jacks of your TGR-3, or other components.
- Some audiophile cables should be hooked up in one direction, these are usually marked with arrows.
- It is usual for the right channel patch cord plugs to be red and the left channel connections to be white, grey or black. Composite video connections are usually yellow.

Video Connections

The TGR-3 has four types of video connections: composite video, S-video, component video and HDMI. Choose component or S-video if your video system supports it, as this will give better picture quality than composite video.

When an audio/video component is selected, the audio will play in your system and the video will be switched to a video input of your TV monitor.

You must have the TV connected in order to see the On Screen Display (OSD). For component video OSD, only the system setup menus are available, not the pop-up text (volume, source etc.) which appear on the composite or S-video outputs. For HDMI, no OSD is available.

12 VDC Trigger and Relay


The Main Zone and Zone 2 12VDC terminals each supply 12 VDC whenever that zone is turned on. This can be used to turn on external power amplifiers equipped with a 12 V trigger input, or to deploy video screens.

The two middle terminals marked as relay contacts are connected together only when the Main Zone is on *and* an input is selected for which the trigger output is enabled. The OSD INPUTS Menu can be used to select which inputs have the trigger output enabled or disabled (see page 34).




Use all standard safety precautions and make sure all the equipment is disconnected before making any connections.

Here are two connection options:

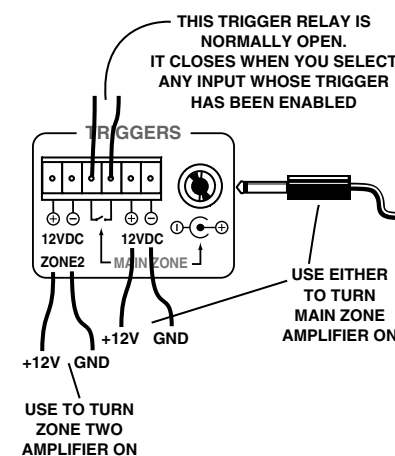


DO NOT use the relay contacts for 120 VAC or 240 VAC switching! They are only for low voltage AC/DC loads of 2 A maximum.

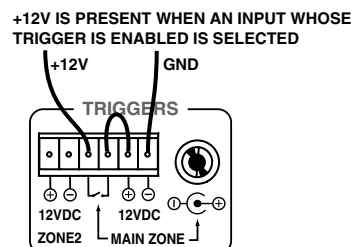

System Configurations


The following pages show some typical connections that you might make in your installation. They show how the inputs and outputs of the TGR-3 are connected to various audio and video components.

Analog audio and composite video

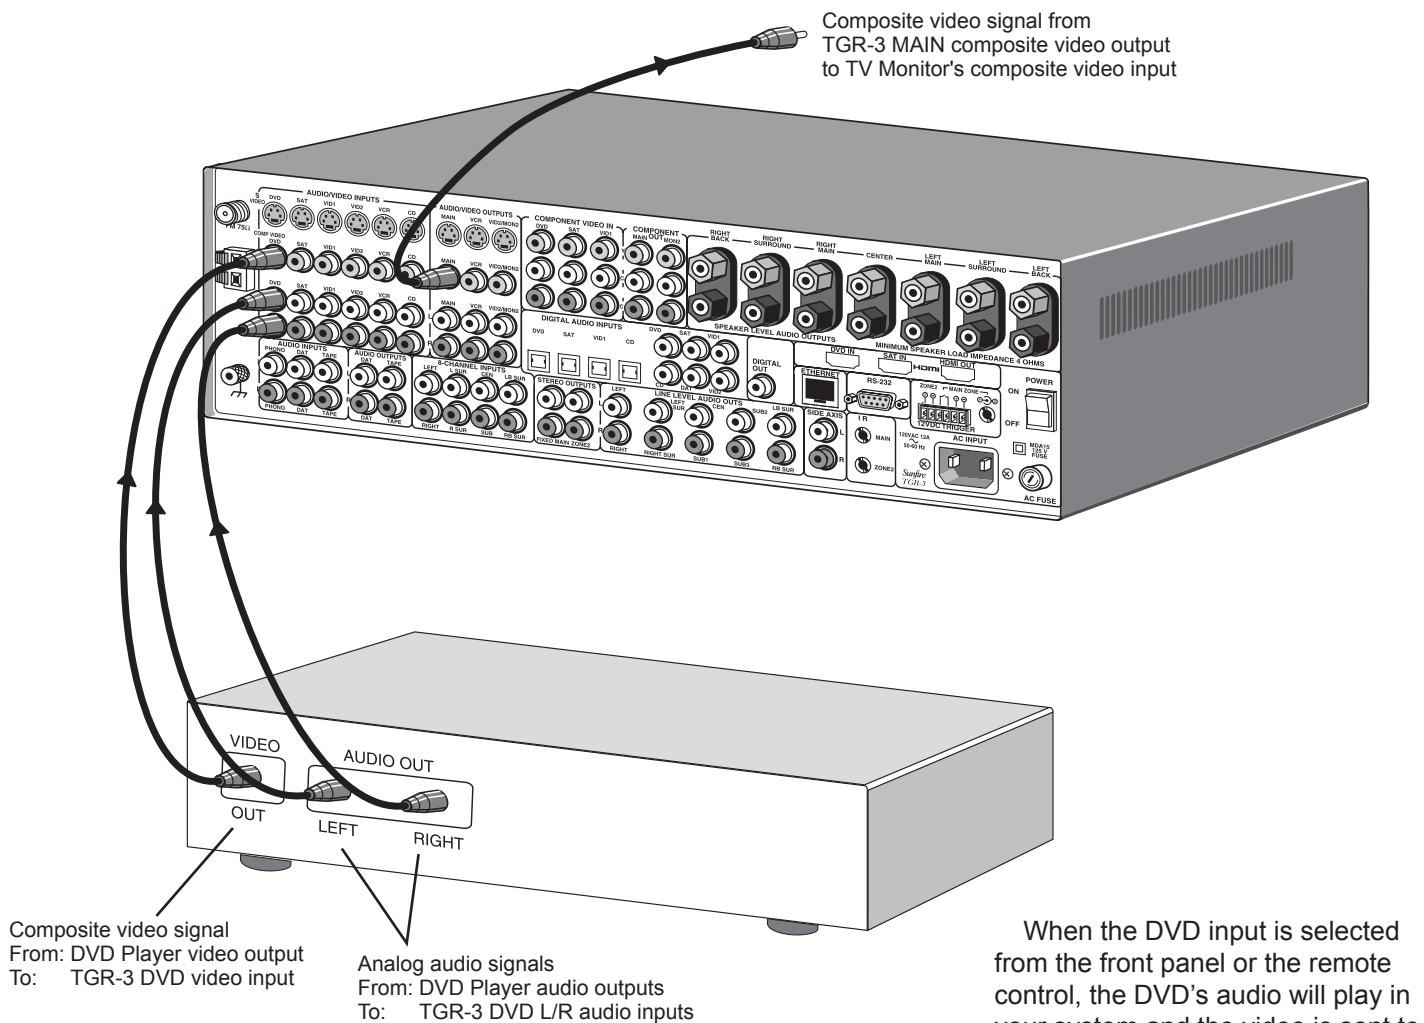



Digital audio and component video connections

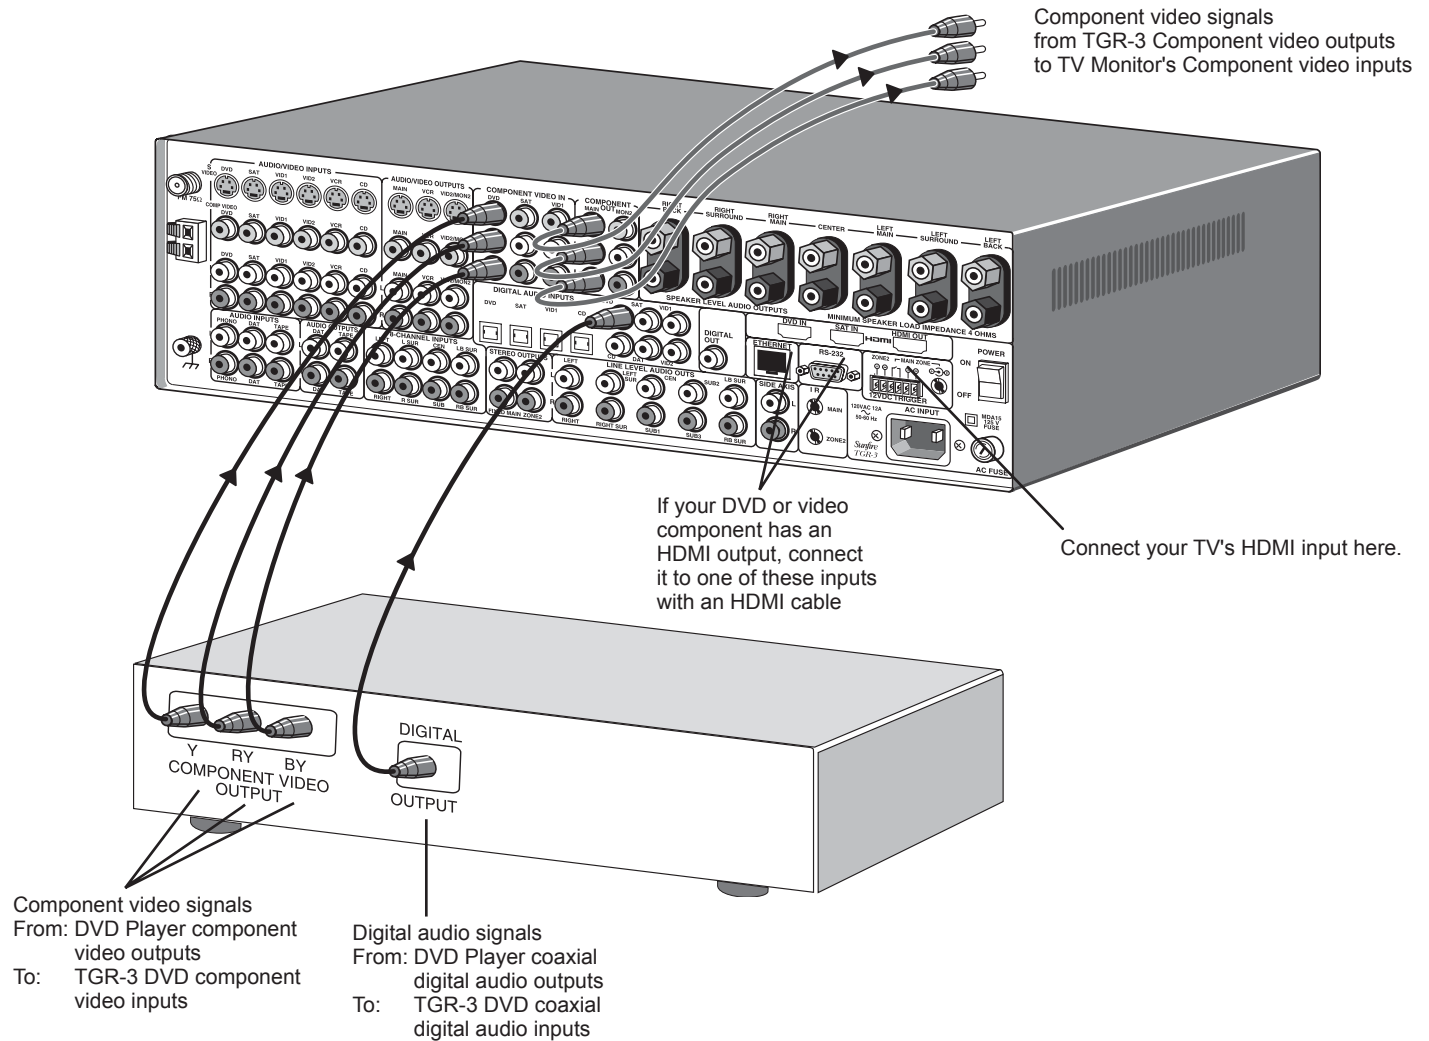


If your DVD and TV Monitor both have component-video, they can be connected as shown, giving a superior picture.

The digital output from the DVD player must be connected to the digital inputs of the TGR-3. This is the only way the TGR-3 can receive and decode Dolby Digital or DTS signals. It is best to use a coaxial digital cable to make the connection to the TGR-3, rather than a standard audio cable.

Note: you must also connect the player's two-channel audio outputs if you want it to play it in Zone 2 when the Main Zone is playing a different source.

LD connections: external RF Demodulator and S-Video

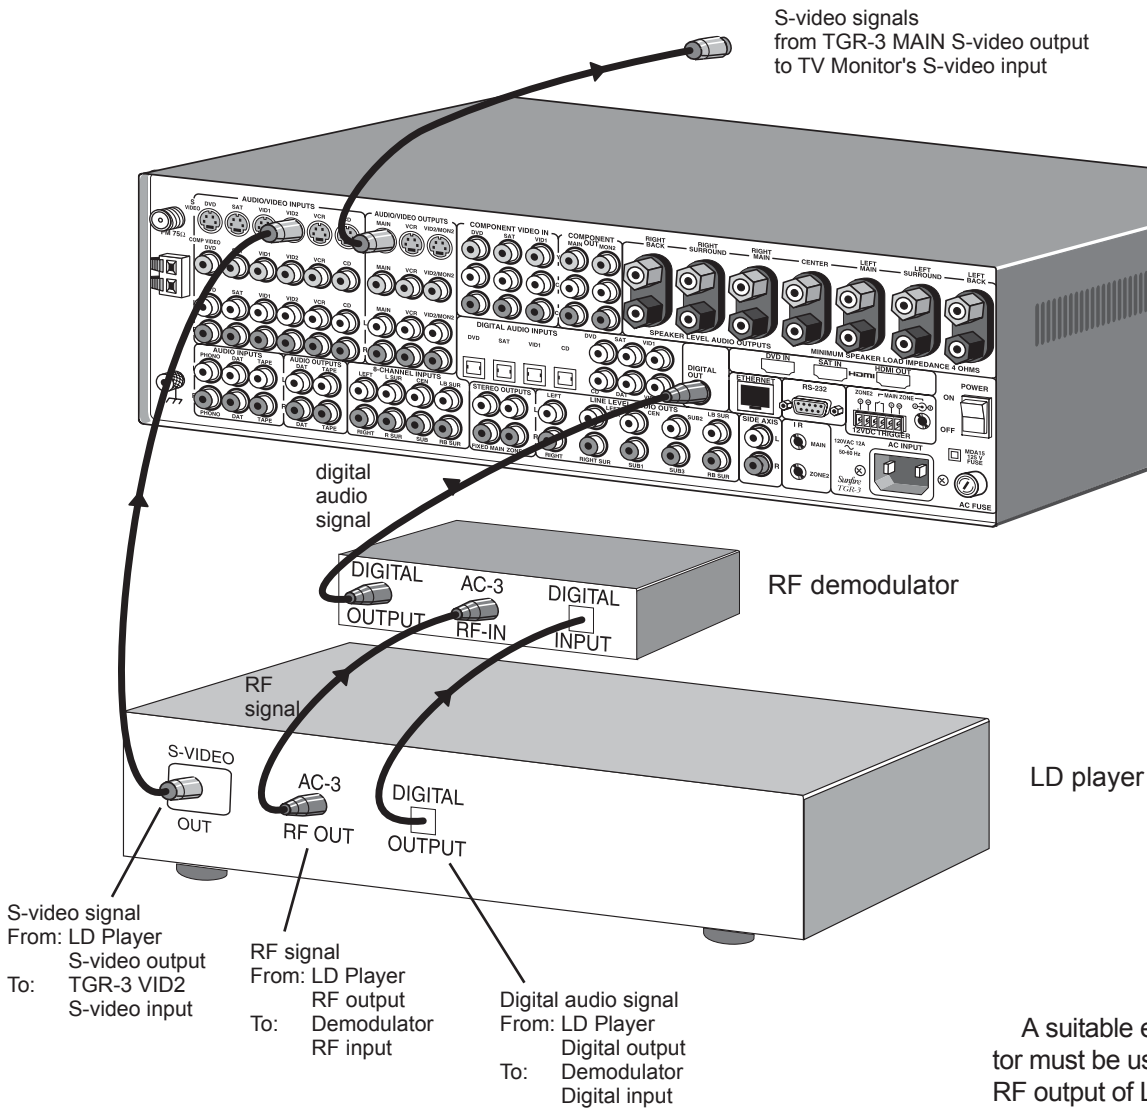

A suitable external RF demodulator must be used to convert the AC-3 RF output of LD players. Ideally, the demodulator should also have a digital bypass (pass-through) feature. Lexicon and B&K are among several companies making excellent demodulators with this feature.


If your LD and TV Monitor both have S-video, they can be connected as shown. This gives a better picture than composite video.

Note: you must also connect the player's two-channel audio outputs if you want to play it in Zone 2 when the Main Zone is playing a different source.



VCR connections: analog audio and composite video

Composite video signal from
TGR-3 MAIN composite video output
to TV Monitor's composite video input

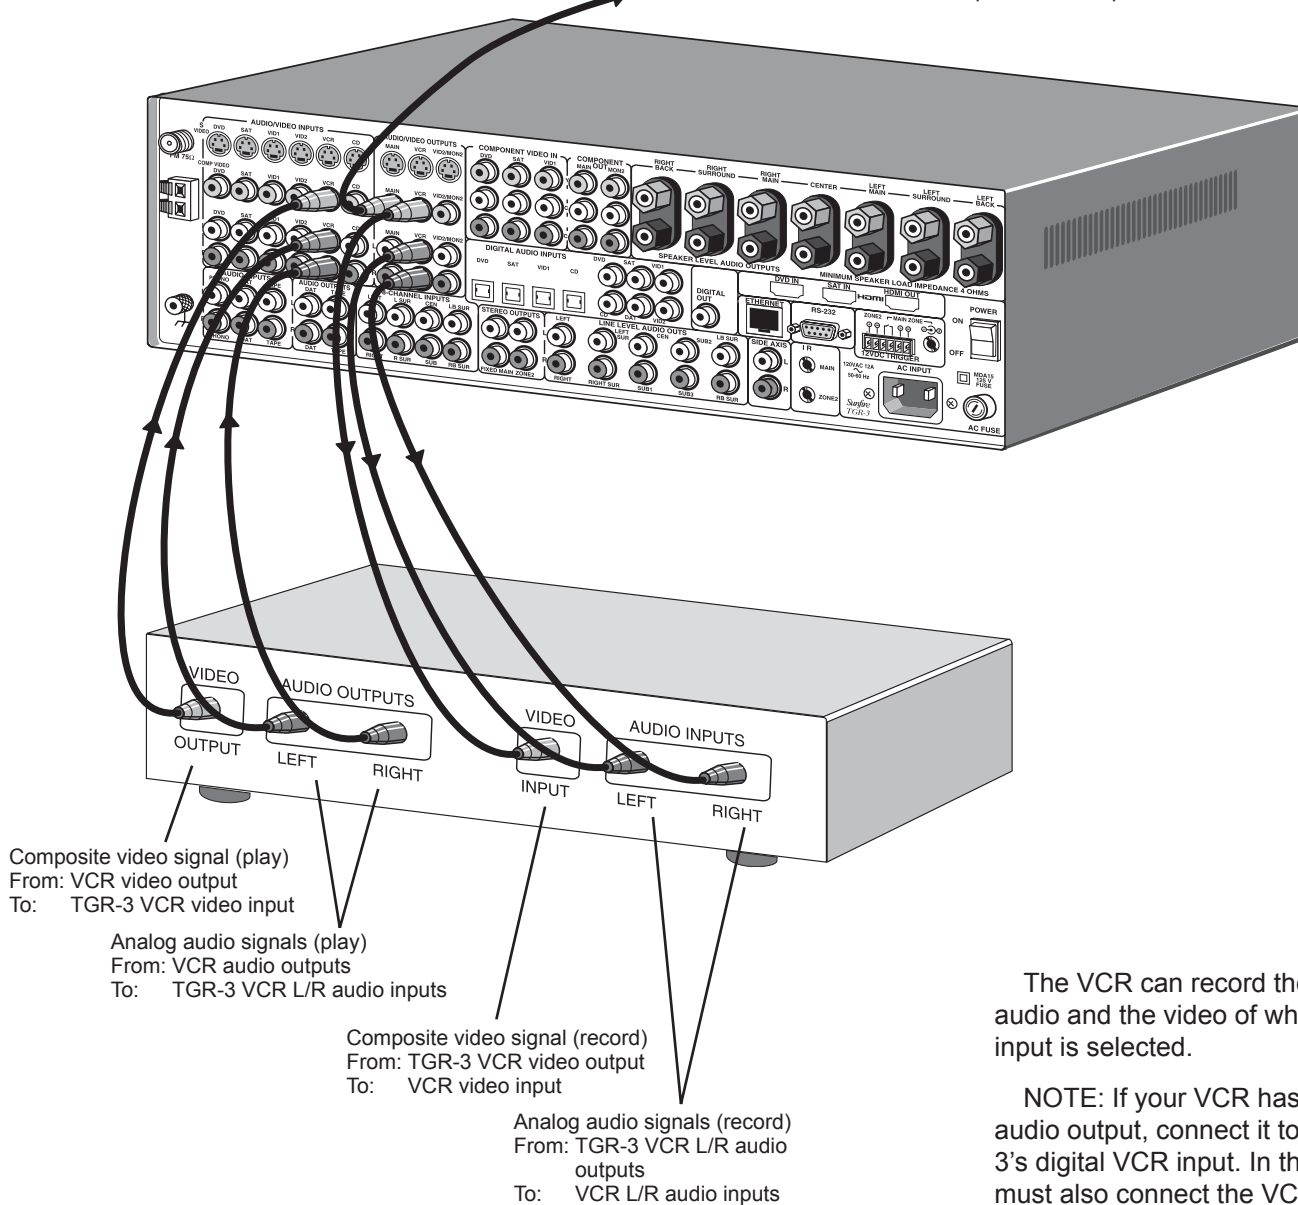

The VCR can record the analog audio and the video of whichever A/V input is selected.

NOTE: If your VCR has a digital audio output, connect it to the TGR-3's digital VCR input. In this case, you must also connect the VCR's analog audio outputs (as shown) if you want to play in Zone 2 when the Main Zone is playing a different source.



CD and Antenna connections


AM Loop Antenna

Position this to get the best reception before fixing it in place. The supplied loop antenna has been carefully matched to the AM tuner. Larger Loop antennas may improve reception, provided that their inductive value is around 18 uH.

FM Antenna

The supplied dipole antenna and its adaptor push onto the rear panel's F-type connector as shown. First screw the spade terminals of the dipole antenna onto the adaptor.


An outdoor antenna can be used for improved reception. Take care to observe all the safety instructions shown on page 3.

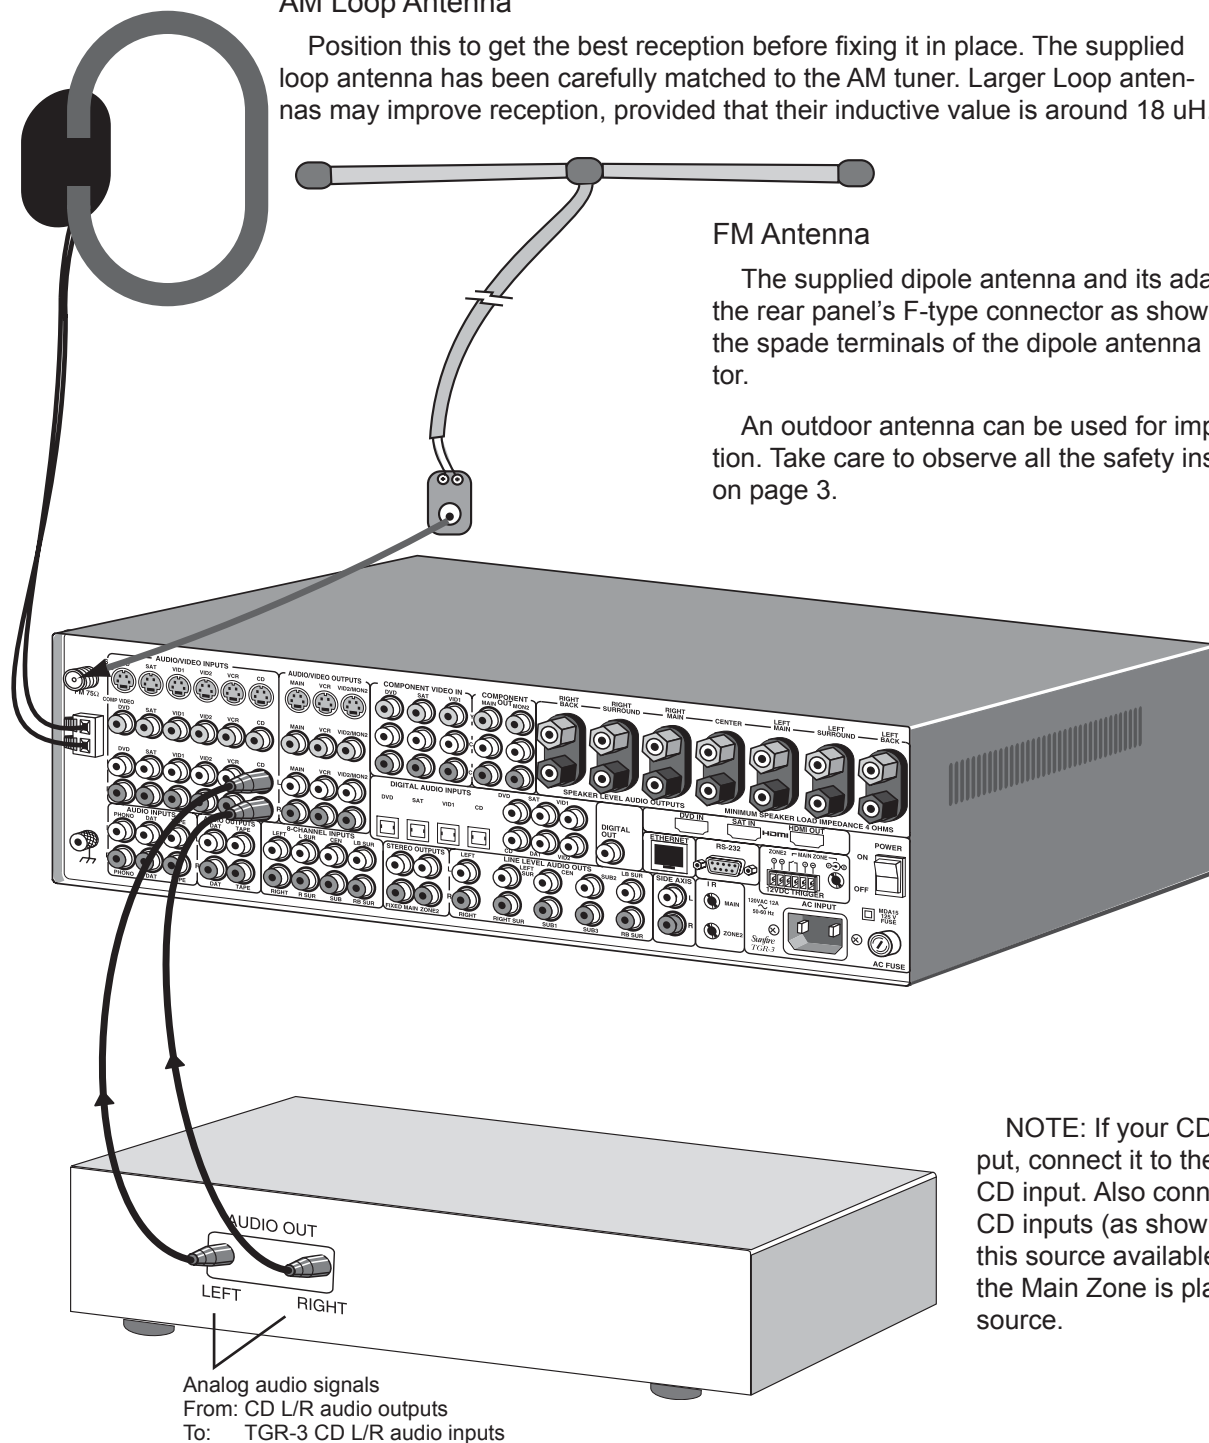

NOTE: If your CD has a digital output, connect it to the TGR-3's digital CD input. Also connect the analog CD inputs (as shown) if you want this source available in Zone 2 when the Main Zone is playing a different source.




Turntable connections

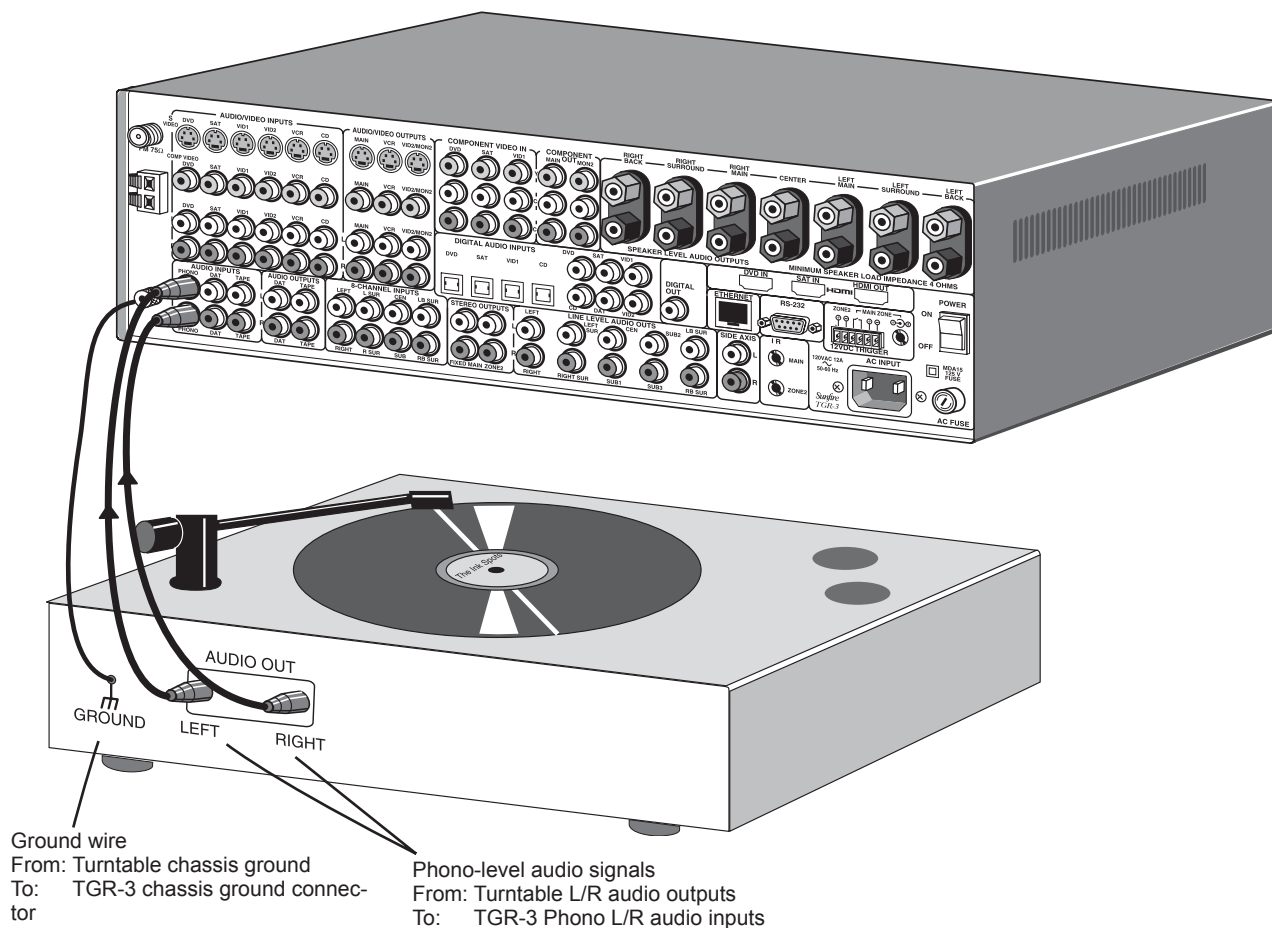

Only connect a Turntable to the PHONO inputs. In most cases, you should also connect the ground wire to reduce any hum through the speakers.




The TGR-3 PHONO input is designed for moving magnet cartridges and high output moving coil cartridges. DO NOT connect CD players or other line-level sources to this input.

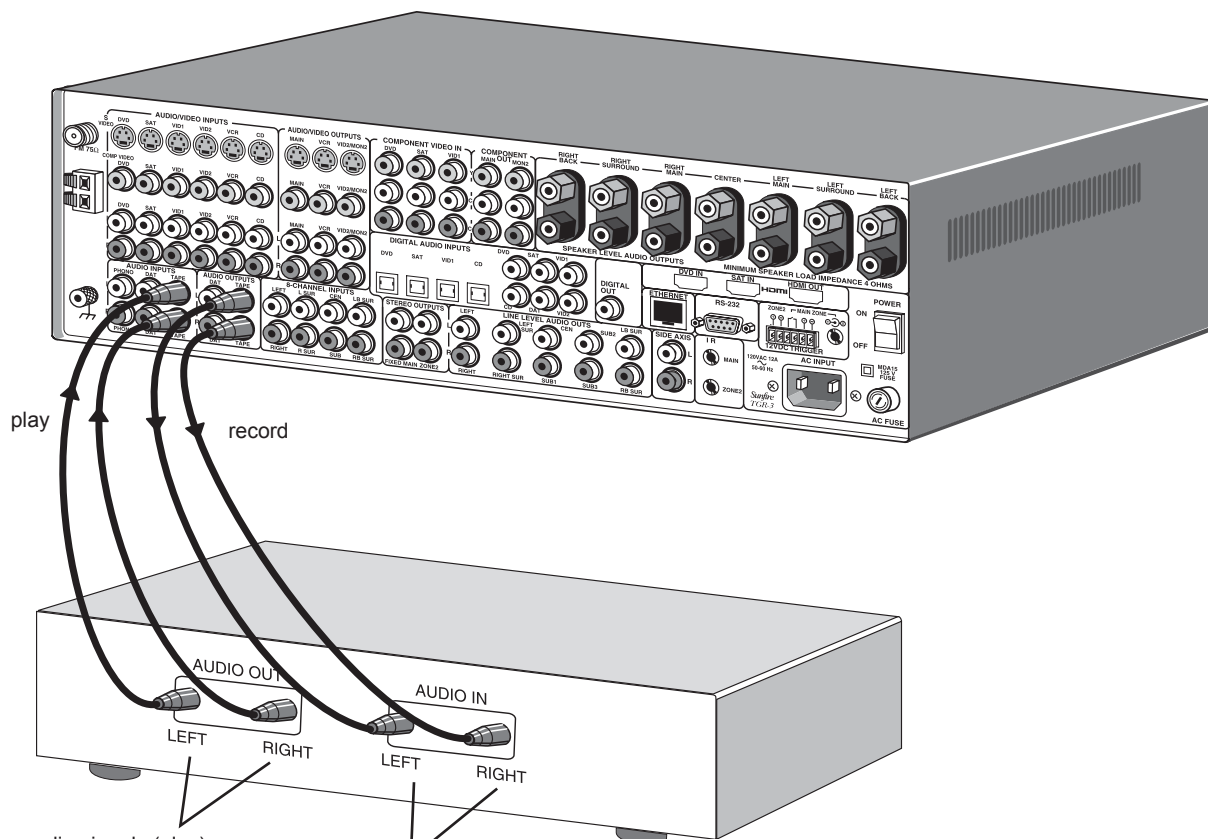

Analog audio signals (record)
From: TGR-3 Tape L/R audio output
To: Tape Player L/R audio input



8-Channel Input connections (analog audio)

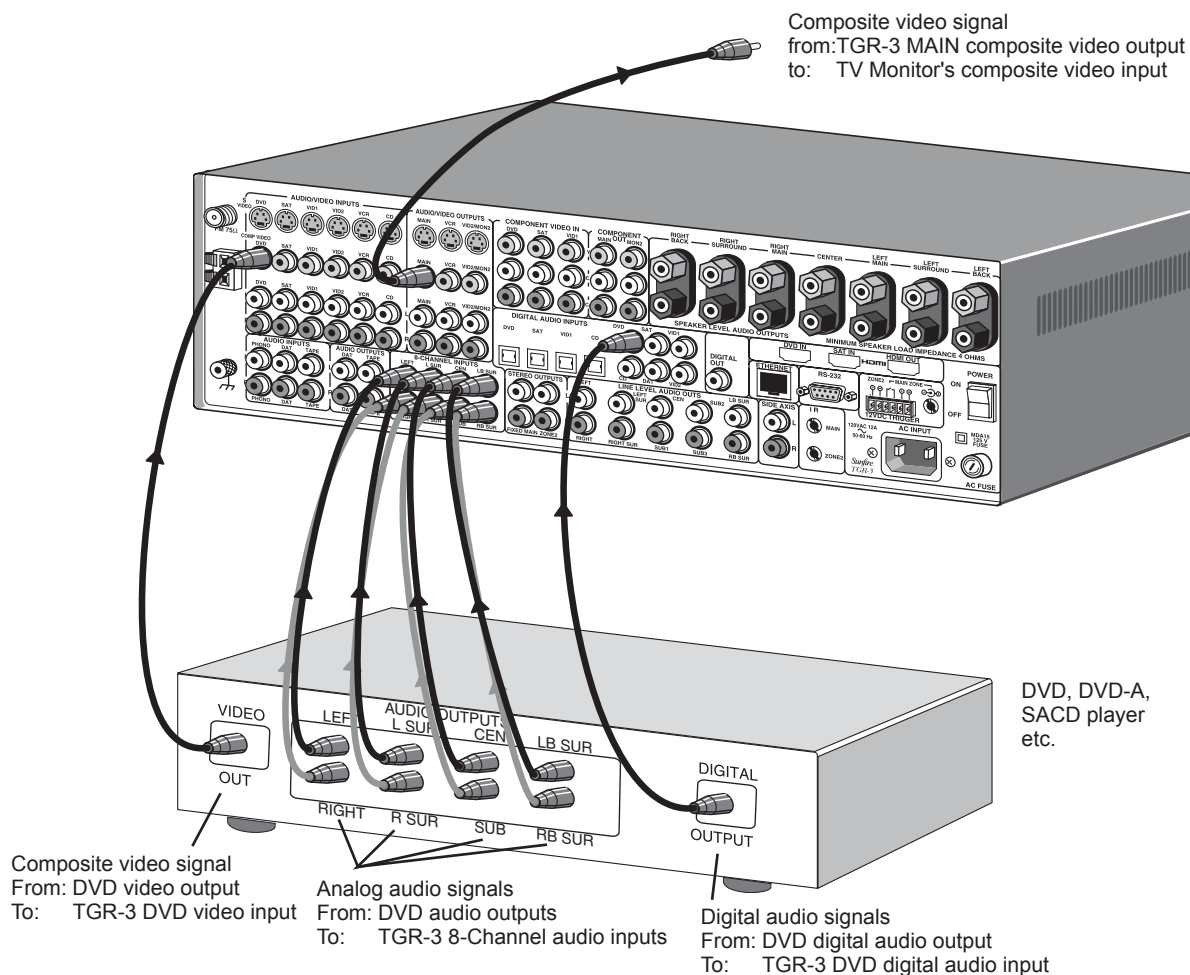

This input is really useful as an input for DVD A, SACD, etc., as a multichannel direct (DSP-bypass) input.

If your DVD player has its own surround processing circuits you can connect it as shown. The surround back inputs can be left disconnected if your player does not have these outputs.

An external surround processor can also be connected like this. You will have to connect some of your sources to the external processor, so it can process the original signals.

Note: The eight channels of audio from the DVD bypass the DSP circuits of the TGR-3, so the tone controls,


bass management and surround mode selections will have no effect. This provides the highest fidelity signal path for SACD or DVD-Audio, free from any coloration or processor circuitry.

This input is only for the Main Zone, it is not selectable for Zone 2.

The video output in this example is connected to the TGR-3 DVD composite video input. Use the OSD 8-CH input configuration menu to lock the 8-channel input to DVD video (see page 34 for details). Whenever the 8-channel input is selected, the DVD video will also be selected.

In this diagram, the player's digital output is also connected. If you select the TGR-3's DVD input, you will get DVD video and DVD digital audio. If you select the TGR-3's 8-Channel input, you will get DVD video, and analog audio from the 8-channel input.

Output connections

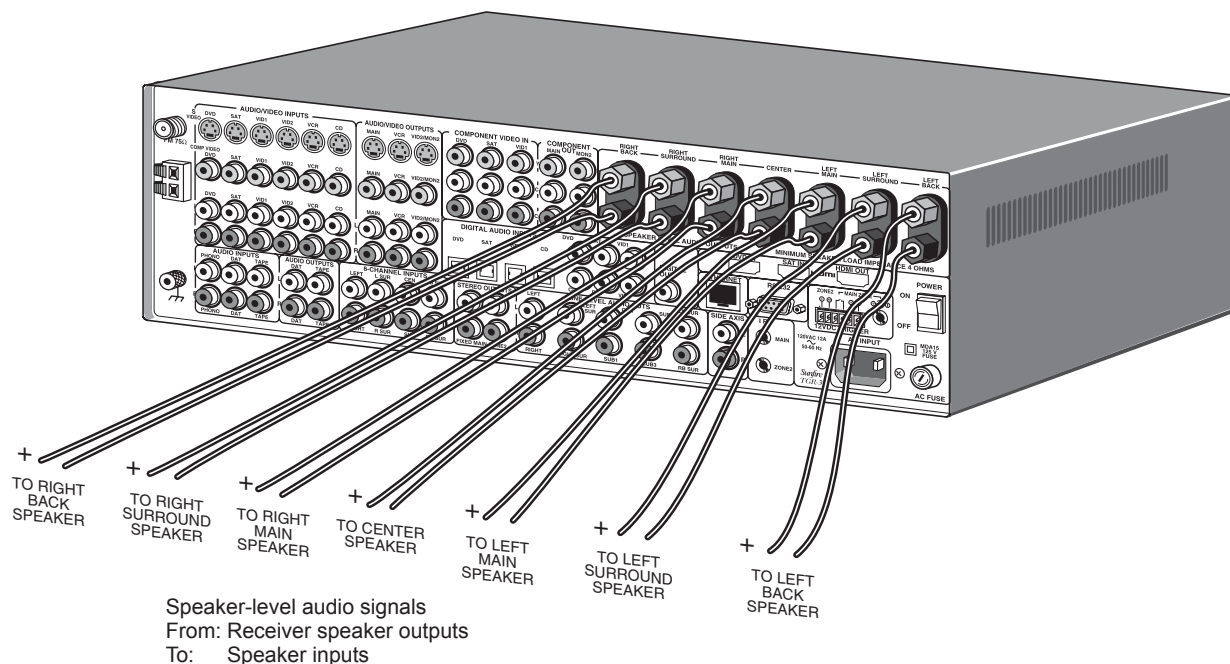

Speaker-Level Outputs

The TGR-3 speaker output posts accept bare wire, speaker lugs, dual-banana and single-banana connectors. Use good quality speaker connectors and speaker wire.



If you are using banana plugs, make sure the TGR-3 output posts are fully tightened by hand.



Always turn off the TGR-3 when you make speaker connections.



It is very important to check that the negative and positive speaker wires do not touch. This will prevent damage to the TGR-3's internal amplifiers.

The TGR-3 can be configured so the surround back speaker outputs power the surround back, side-axis, or Zone 2 speakers. See page 41 for more details.


The other five speaker outputs are fixed, and connect to your front, center and surround speakers.

Line-Level Outputs

The line-level audio outputs can be connected to external power amplifiers and powered subwoofers. For example, if you choose the surround back speaker outputs to power your surround back speakers, you could use an external amplifier to power side-axis speakers, and a second power amplifier to power Zone 2 speakers.



Zone 2 connections

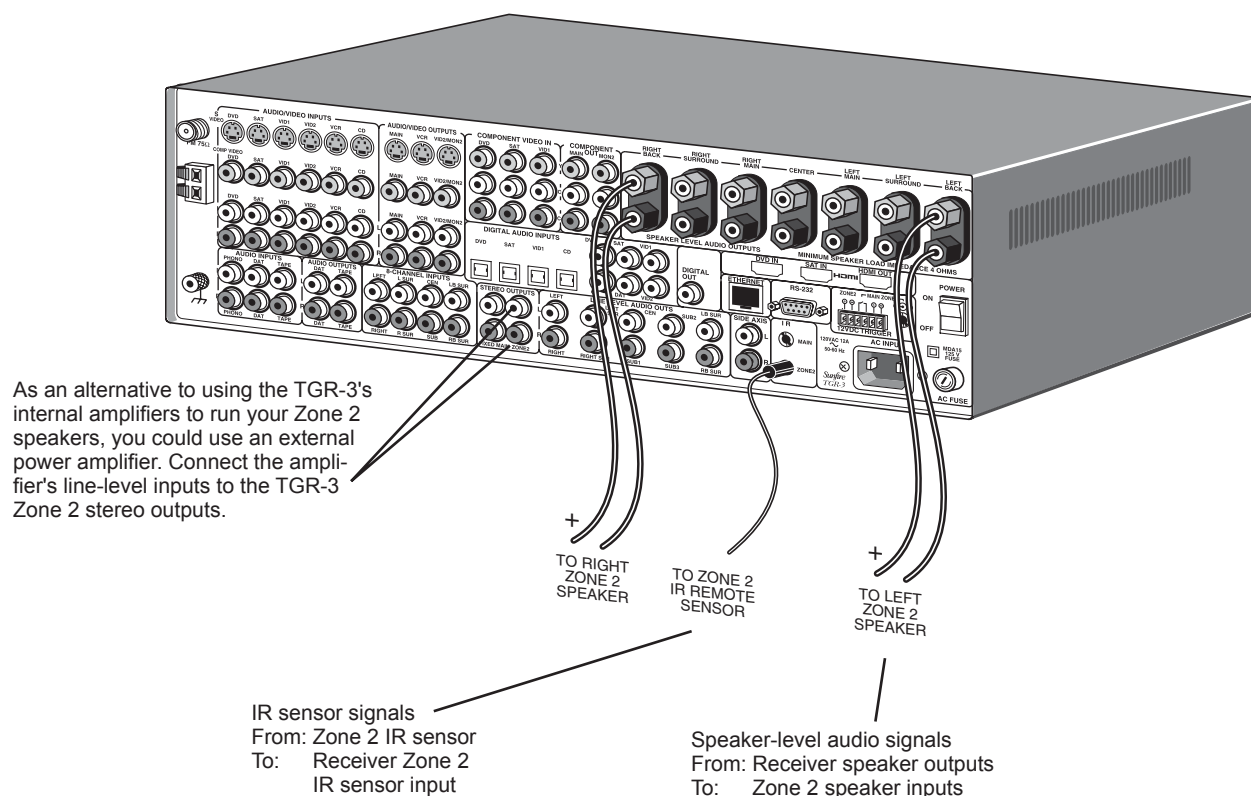

Zone 2 can play stereo analog sources independently of the Main Zone, or can play the same source. Zone 2 can only play a digital source if the Main Zone is playing the same source.

Note that Zone 2 has to be enabled before it can be used. Please see page 47 for more details of Zone 2 operation.

If you want the TGR-3 speaker-level outputs to run your Zone 2 speakers, use the Amplifier OSD menu, under the Speaker menu, to set Aux to Zone 2 (see page 41).

Long speaker wires are connected to the speaker outputs as shown, and are run out to your Zone 2 speakers. These are usually located in another room or area of your house.

If you have an external power amplifier to run your Zone 2 speakers, connect the TGR-3 Zone 2 line-level stereo outputs to the inputs of your amplifier. Connect your Zone 2 speakers to the amplifier with speaker wire. The TGR-3 can then be used to power other speakers, such as the surround back or side-axis speakers.

The wire from an optional IR sensor is shown connected to the TGR-3 Zone 2 IR input. The TGR-3 is compatible with most makes of IR sensors and equipment.

The sensor can be located in a suitable area of Zone 2, allowing you complete control of the volume and source selection. Zone 2 can also be controlled from the front panel, using the remote's Zone 2 buttons.

Remote Control

Think of the TGR-3 remote control as ten remotes in one. There are ten **DEVICE** buttons, five on either side of the display, and each allows the remote to operate one piece of equipment.

From the factory, the device buttons are labeled: CD, TAPE, AUX, ZONE2, RECVR, DVD, VCR, SAT, TV and CABLE.

Only the TGR-3 and ZONE2 buttons are pre-programmed, and these allow the remote to operate your TGR-3. The remote can be set to operate your other remote controlled equipment. This is done in three ways from the hidden **SETUP** menu:

1. Entering a code from the tables at the end of this manual
2. Stepping through the codes
3. Learning from your other remotes

See Remote Setup on page 27 for more details.

LCD Display

The top line shows the present device, mode or status, and it shows when a remote command is being transmitted. The bottom line shows the page number, status and basic instructions during programming.

The main part of the display shows the labels of the ten **DEVICE** buttons. You can change any label and customize the remote to fit your system. Note: this is not a touch-sensitive screen, just a way of labeling the device buttons on each side, and showing instructions and status.

Contrast

The contrast of the display can be changed by holding down the **MAIN** button and pressing the joystick pad UP or DOWN.

Light

The button on the right side of the remote briefly turns on the lights for the buttons and display. Pressing it again will turn it off. The number of seconds can be varied, or it can be disabled.

Device Buttons.

Once you press a device button, all the device buttons change label and function to become buttons to operate your device. There are two pages per device, and you can move between them using the **PAGE** button.

PAGE

Use this to jump to various display pages. For example, if you press the TGR-3 device button, the display changes to some show buttons which control your TGR-3. If you press **PAGE**, the display will move to page 2, showing more functions for the TGR-3.

MAIN


This button will return the remote display back to the Main menu. Depending on which mode you are in, it may take two or more presses. This will help you get back to the Main menu if you ever get lost in the menus.

FAV

This button allows you to step through five display pages of your favorite TV and radio stations. These can be set and re-labeled to suit.

Joystick Pad

This pad and surrounding buttons are used to operate standard DVD menus, and VCR and Tape transport controls. In TGR-3 mode, if you press **MENU**, the On Screen Display will appear and the joystick can be used to select and adjust the various items.

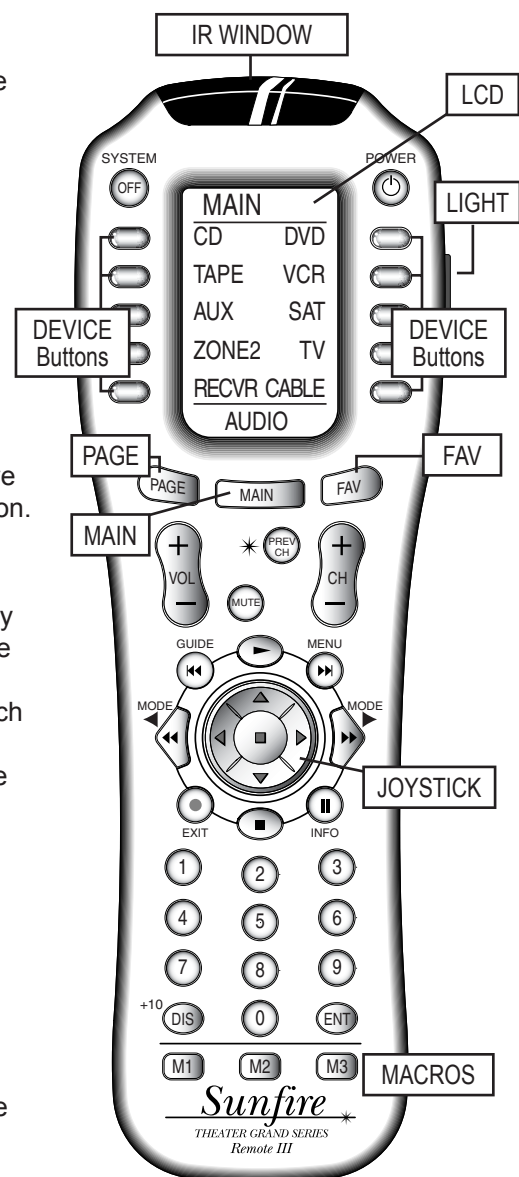

M1, M2 and M3 Macros

These **MACRO** buttons can be programmed to send out a sequence of commands with a single press.

Batteries

The remote takes four AAA batteries inside the rear compartment. These should last about six months in normal use, before a low-battery warning appears.




Operating the TGR-3 with the Remote

1. Press the remote's MAIN button to make sure the display is on the main display menu.

2. Press the RECVR device button to set the remote to operate your TGR-3. The display changes to show the TGR-3 input selections:



3. Press PAGE to reach page 2 of the display menu.




SMOD- and SMOD+ allow you to navigate through the assorted Dolby Pro Logic modes (Pro Logic, PLII Music, PLIIX Music, PLII Movie, PLIIX Movie and PLII Matrix) or you can toggle between Neo:6 Cinema and Neo:6 Music.

The BAND button allows you to switch between the AM or FM bands of the Tuner.

Page 2 also allows you to engage HOLOGRAM, and to adjust the volume trims for center, surrounds, and sub. On the right is '+' (increase level) and on the left is '-' (decrease level).

4. The following buttons with fixed labels are also programmed: Power, Volume up, down and Mute. The number pad accesses the tuner presets directly, and CH+/- steps through them. DIS is the +10 function, and ENT is station enter. The MODE buttons either side of the joystick, allow you to select the different surround modes.

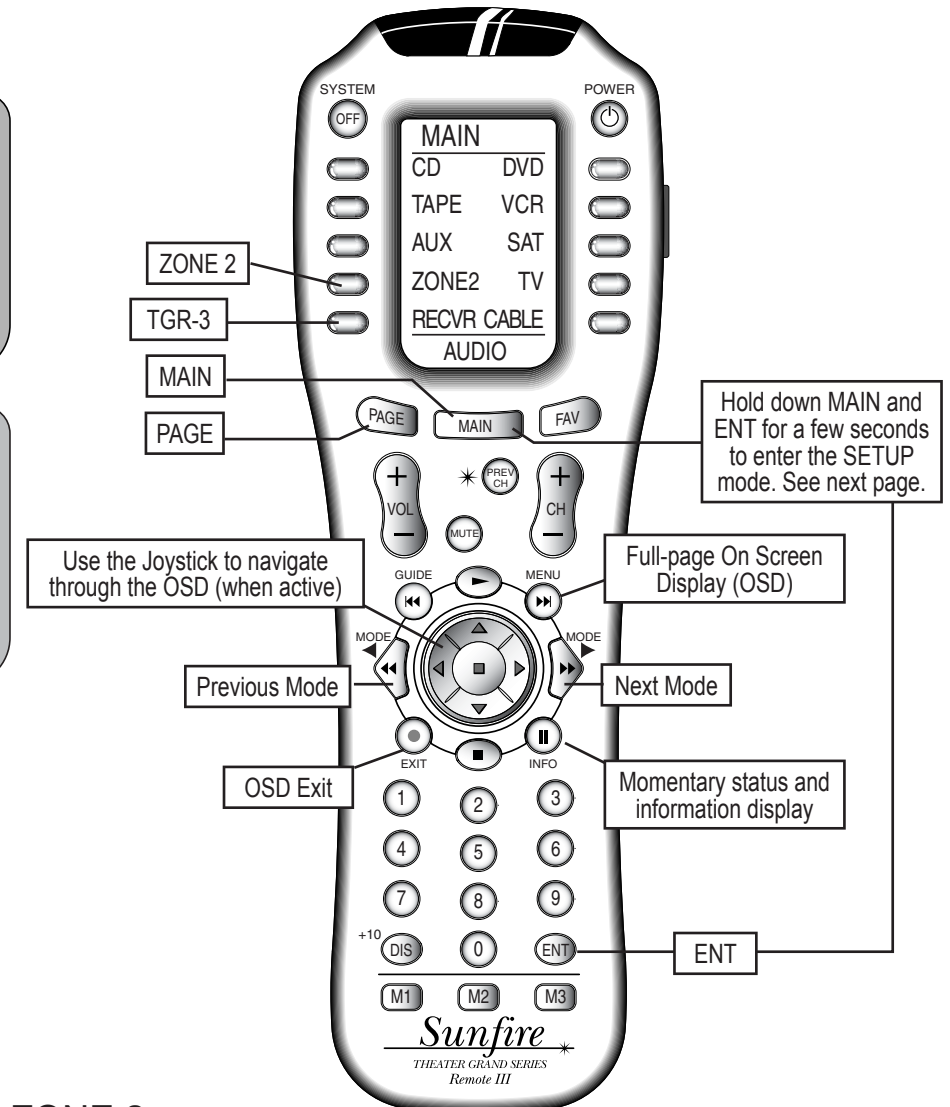


ZONE 2


Note: Zone 2 must first be enabled using the OSD (see page 36), or these controls will have no effect. Zone 2 can be turned on even if the Main Zone is off.

See page 47 for more Zone 2 details.

1. From the main display menu, press the ZONE2 device button to access features of the second zone. Page 1 shows the input selections.



2. The hard buttons operate Zone 2, such as Power, Volume, Mute, and the Tuner controls and presets.



3. Page 2 shows Zone 2 on/off, Zone 1 on/off, and Zone 2 balance left/right.




Remote Setup

You must enter the SETUP mode to program the remote control for the other components in your system, and to customize it for your convenience. There is only one way to enter the SETUP mode:

Hold down both the MAIN and ENT buttons for a few seconds until SETUP appears in the display.

The SETUP display shows 10 options. These are described in more detail as follows:



P-PRO

The remote is pre-programmed to operate many types of equipment. The P-PRO mode allows you to enter a 3-digit code to recall the commands for each of your system components.

1. Find the make of your TV, DVD, VCR, CD and other components, then look at the tables at the rear of this manual. Make a note of the various codes for each piece. Note that some TV/VCR combined units may use VCR codes, not TV.
2. Sit in a position in front of your equipment, and make sure that all components are turned off.
3. In the SETUP mode, press P-PRO and the device labels will appear.
4. Select the device button you want to program, then choose the device table you took the code from. For example, for a TV, press TV twice. If you want AUX to control a VCR, press AUX, then press VCR.
5. You can now enter a code using the remote's keypad, or UP or DOWN. After the third digit is entered, the remote transmits a power command. If the component turns on, press SAVE and then EXIT. Go to step 7.

6. If you could not find a code which works, hold the UP button to step through all the codes in the table for that device. Release UP when your equipment turns on. If you go past, press DOWN. Press SAVE and then EXIT.

7. The display will change to show the devices again, still in the P-PRO mode. Repeat steps 4 to 7 until all your equipment is working.

8. Press MAIN to return to the main menu from any setup mode.

9. Test the remote to see which buttons will operate your equipment. For example, if you were trying to control your TV, check the power, channel up and down, and volume up and down. If some of these buttons are not working correctly, choose another code for that manufacturer, or you can learn over those not working by using the LEARN mode.



NOTE: If you accidentally "learn over" one or more of the buttons which operate the TGR-3, fear not. You can use ERASE (see page 28) to reset either the individual buttons, or the whole TGR-3 bank. After erasing, the buttons will revert to their TGR-3 programming.

FAV

This mode allows you to enter your favorite TV and radio stations.

Note that the following procedure assumes you have already programmed your remote to operate your TV, radio tuner and other equipment. The keypad must already be able to select channels on your TV or SAT, and any TGR-3 tuner presets.

Before using FAV mode, use the EDIT mode to change the labels in the FAV display to show your station call signs or reminders. You can also delete the labels from unused buttons, or move all your most favorite FAV labels to page 1.

1. In the SETUP mode, select FAV.
2. Select the device, such as SAT, TV or TGR-3, to learn station commands from.
3. The FAV display will appear, and you can step through five pages using PAGE or FAV.
4. Press a favorite channel button and the first character will blink. Use the keypad to enter the channel number. For channels below 10, you should enter a 0 (zero) first. If you want, you can enter a power button before entering the channel. Also, if your equipment needs it, you may have to enter the ENT button after the channel is entered. If you want to add a short delay, press PAUSE (■).
5. When you have finished with one channel, press its button, and the label will reappear. Move on to the next favorite channel and program it in the same way. Repeat this for all the channels and devices. Press MAIN to return to the top menu.
6. Now, if you press the molded FAV button, the favorite channels appear in the display, and the ones you programmed will take you to your favorite channel or radio station. If you programmed in a power command, the TV or tuner will turn on first.
7. The commands are sent in sequence, for example for channel 13, first the 1 and then the 3 are sent. Wait a few seconds before switching between favorites, or your TV may receive for example, the 1 of one button and the 2 of the next.

continued..



Remote Setup continued

PUNCH

This mode allows you to set up the volume, channel up/down and transport buttons so they will work for your main devices, no matter which device the remote is set for. For example, the volume buttons can operate the TV, even if the remote is set to VCR. The channel buttons can operate the VCR, even if the remote is set to TV.

1. In SETUP, select PUNCH and the display changes to show VOL, CH, and PLAY. The PLAY selection will make the eight transport buttons around the joystick punch through.
2. Select one of these buttons, for example VOL.
3. Press a device button for the device you want the Volume commands to appear in (punch TO).
4. Press a device button for the device you want to learn from (punch FROM). These settings are saved.
5. Repeat steps 2 to 4 until you have punched to all devices you want.
6. Use MAIN to return to SETUP.

NOTE: To erase Punch commands from a device (return buttons to their previous programming): Repeat steps 1 and 2, then press the device button twice. Repeat for other devices, then press MAIN to return to SETUP.

ERASE

Use this mode to erase commands stored in the remote. This does not affect the labels, just the stored IR commands. The pre-programmed commands for the TGR-3 will not be lost, as they can be recalled.

1. In the SETUP mode, select ERASE and the display will show LEARN, FAV, MACRO and EXIT.
2. If you select LEARN, press ALL to erase all learned buttons, or KEY

to erase one device at a time. If you use KEY, press MAIN and EXIT when you have erased all the devices you want.

3. If you select FAV, press ALL to erase all favorites, or KEY to erase single favorites. Note that the labels are not erased.
4. If you select MACRO, press ALL to erase all macros, or KEY to erase macros, one device at a time.
5. Press EXIT to return to the SETUP menu, and press MAIN to return to the main device menu.

LIGHT

This mode allows you to either disable the light, or change the number of seconds it stays on. (The light is inactive while in the SETUP mode).

1. In the SETUP menu, select LIGHT and the display will show ON, time in seconds, SAVE and EXIT.
2. If you press ON, it changes to OFF and disables the light. This is useful if you want to save battery life, or if the kids like to use the remote as a flashlight or Light Saber®.
3. Use the keypad to enter the number of seconds you want the light to stay on. If you enter 00, it only stays on while the light button is held down.
4. Select SAVE, or press EXIT to make no change. Either of these will return you to the SETUP menu.

LEARN

The remote can learn commands from other remote controls. This is useful if the pre-programmed commands do not operate some of your equipment, or certain buttons do not work, or you want to customize key functions.

NOTE: PAGE, MAIN, FAV, M1, M2 and M3 cannot be learned over.

1. Find your original remote and make sure it has good batteries, and it operates your equipment perfectly. In the following example, the Sunfire remote will learn the PLAY command from a DVD remote.
2. Point the DVD remote into the Red IR top window of the Sunfire remote. Place them on a flat surface, about 1 to 2 inches apart, and avoid bright lighting or sunlight.
3. In the SETUP mode, press LEARN.
4. Select the DVD device button and the display will change to show some common DVD labels (remember there are two pages).
5. Select the PLAY button just above the joystick pad. The display will show "READY."
6. Press your DVD remote's PLAY button. The display will show "GOOD" if it has been accepted. If it shows "FAIL," press PLAY again.
7. Press another button on the Sunfire remote and repeat the procedure until all the DVD buttons you need are learned.
8. Press MAIN once to return to the LEARN mode, twice for SETUP and three times for the MAIN menu.
9. Try out the Sunfire remote and see if the learned buttons will successfully operate your equipment. You may find that some commands cannot be learned, because some are non-conventional, or too long or too short.
10. The EDIT command can be used to change the labels if some of the standard labels do not correspond to your original remote buttons.

continued..



Remote Setup continued

MACRO

The macro mode allows you to set up certain buttons to transmit up to 20 commands in sequence. For example, a single button press could turn on all of your home theater equipment, and set the TGR-3 to DVD, set the TV to channel 3, and set the DVD to play, make the tea and put the cat out.

The buttons which can be programmed as macros are: M1, M2 and M3 at the bottom of the remote, and Power and System at the top. The ten device buttons can also be programmed as macros, although these will only be activated if the device button is held down for a few seconds.

Note that the macro buttons are independent of which device the remote is set for. So there is only one M1 macro, only one power macro etc.

1. In the SETUP mode, press MACRO.
2. Press one of the buttons you wish to program as a macro, such as M3, Power, or a device button.
3. Press up to 20 buttons you would like the macro to store. Do this in the exact order you want them to be transmitted. Use the PAGE, FAV and the direct buttons to find buttons to use in the macro.
4. To add a delay between steps, you can add 0.2 seconds each time you press PAUSE (■). This does not take up a step.
5. Press the Channel UP button to save your macro.
6. Repeat this procedure to program more macros, and press MAIN to return to the main menu.
7. Try out the macros to see if they work OK. It may take some time to transmit all the commands in sequence, so keep the remote pointing at your equipment and do not move it during this time.

Note that the remote's Zone 2, Page 2 has discrete on and off codes for the Main Zone and Zone 2. You can use these within Macros instead of the main power button commands (which toggle on/off).

RECAL (Recall)

This mode lets you quickly see the three digit codes you have assigned to each device. This is useful if you want to check the tables and find other codes which may work better.

1. In the SETUP mode, select RECAL. The device labels and their codes will flash alternately, before returning to the SETUP menu. Make a note of the codes.
2. Press MAIN to return to the main device menu.

EDIT

This mode allows you to change the labels in the display to suit your system. You can change device labels, or the buttons on page 1 or page 2 of a device, or the FAV labels.

1. In the SETUP menu, press EDIT.
2. To edit a device label, press PAGE and then the device button. Go to step 5.
3. To edit a button on a device's page 1 or 2, press the device button and its page 1 will appear. Press PAGE to reach page 2 if required. Go to step 5.
4. To edit a FAV button, press FAV and select the button you want from the five pages. Use PAGE or FAV to change pages to find the one you want. Go to step 5.
5. Press the button you want to edit and the first character will flash.
6. Use the keypad to enter up to 5 characters. This is like using a telephone keypad to enter letters. For example, if you press 1 a few

times, it will step through A, B, C, 1. Press 2 for D, E, F and 2. The number 0 has a selection of special characters to choose from.

7. Press the joystick right to move on to the next character, or press it down to delete a character.
8. When finished, press the button next to the label you just edited. You can edit other buttons, or press MAIN a few times to return to the main menu.

CLONE

This feature allows you to easily copy all of the commands and labels from one Sunfire remote (of the same type) to another.


1. Set both remotes on a flat surface, with their IR windows pointing towards each other, about 1 or 2 inches apart.
2. In the SETUP menu for both remotes, press CLONE and the display will change to show SEND, RCV (receive) and EXIT.
3. Press SEND on the remote you want to copy from. Press DEVIC to only clone a single device, then press the device button. Press ALL to clone all programming.
4. Press RCV on the remote you want to copy to.
5. When you are ready, press START on both remotes. It may take up to 40 seconds, so do not move the remotes during this time. The remote will flash "GOOD" if it has successfully learned all the commands. If it flashes "FAIL," then repeat this procedure.
6. Press MAIN to return to the main menu.

On Screen Display (OSD)

Video Connections

The On Screen Display (OSD) is present at the composite video or S-video MAIN outputs, and the component video MAIN and MON2 outputs. It is also present at the output labeled VID2/MON2, but only if it is set to MON2. This is set in the OSD Video menu (see page 37). Make sure that your TV monitor's video input is connected correctly to one of these outputs.

Note that the HDMI output does not support OSD functions.

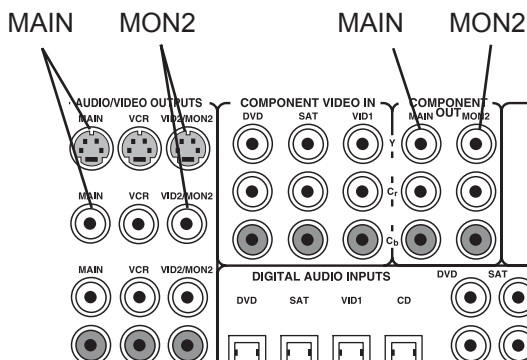

No OSD from:

- VCR outputs
- VID2/MON2 set to VID2
- HDMI output


OSD Activation

The OSD is activated using the remote's MENU button (with the remote set to operate the TGR-3).

The joystick pad and surrounding buttons allow you to navigate through the OSD menus to control and customize many features of the TGR-3.

Press EXIT to quit the OSD at any time. Any changes you make will be saved.

Note that the TGR-3 front panel display shows abbreviated text when the OSD is activated.

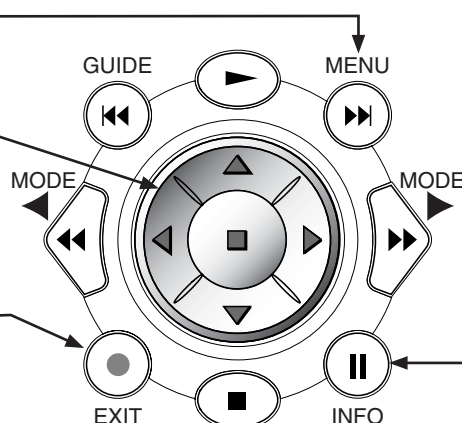

Quick Information

Pressing INFO at any time will bring up a short description of the source you are listening to. For example if you are listening to a DVD, the TV display might show:

DVD DIGITAL 48K
DOLBY EX 5.1 / 5.1


where:

DVD is the selected input,
DIGITAL is the signal type,
48K is the sample rate,
DOLBY EX is the mode,
5.1 is the input format,
5.1 is the output (i.e. five speakers and a subwoofer).

OSD Menus


Main Menu

The first menu of the TV On Screen Display looks like this

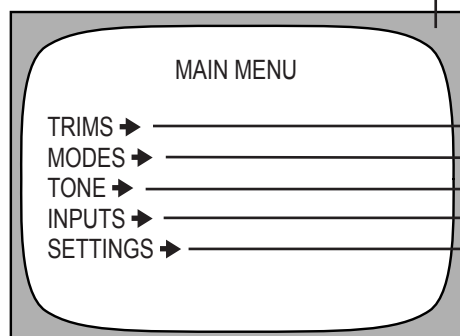

Navigation

Use the joystick pad left, right, up and down buttons to navigate through the menus.




An arrow after text (➡) on the screen, shows there is more information on another page.

The back arrow (⬅) shows that you can return to the previous page.

The down arrow (▼), such as at the bottom of the Inputs Menu, shows there is a second page of similar choices.


The up arrow (▲) shows the way back to the first page.

NOTE: you can quit the OSD at any time by pressing EXIT on the remote. Any changes you make will be saved. There is no need to navigate back through previous pages, unless you want to make more changes.

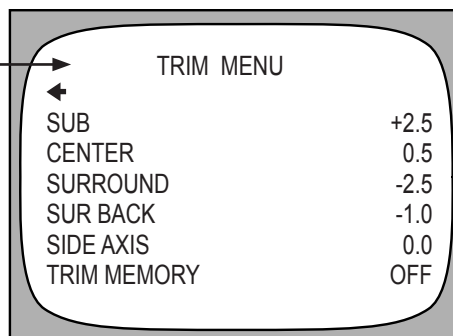


Trim (Page 32)

Adjust the volume of each speaker "on-the-fly."

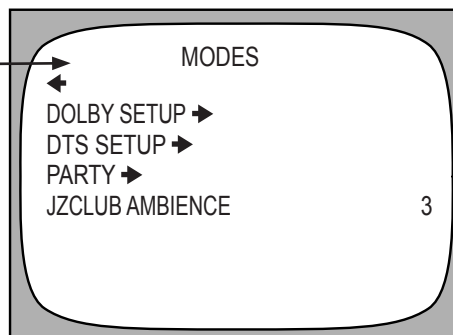


Modes (Page 33)

Adjust the settings of the surround modes.

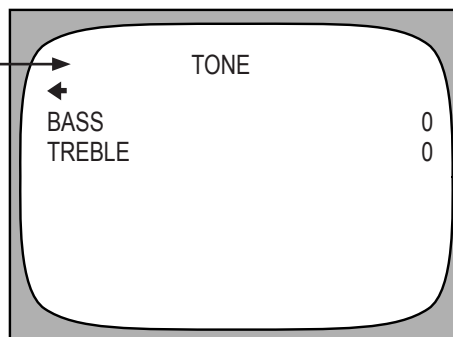


Tone (Page 32)

Treble and Bass adjustment.

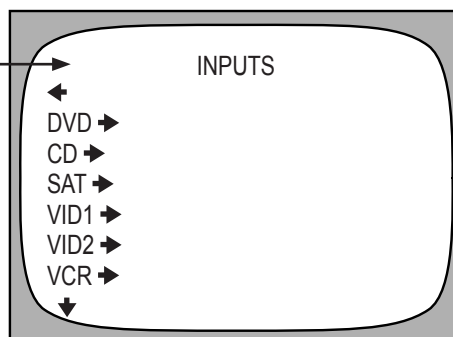

Inputs (Page 34)


Set up each input's trim level, default surround mode, video type, enable/disable in Main or Zone 2, and triggers.

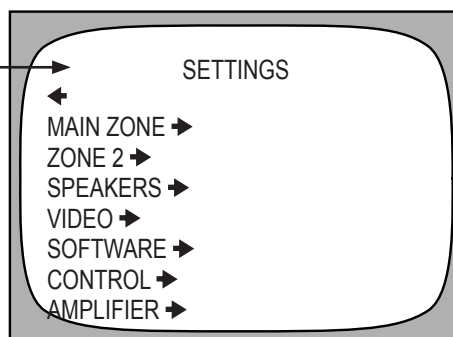


Settings (Page 36)

- Main Zone and Zone 2 volume and power-up setting
- Speakers size, position, calibration, and crossover
- Video and OSD settings
- Software settings
- IR and RS232 setup


Trim and Tone Menus

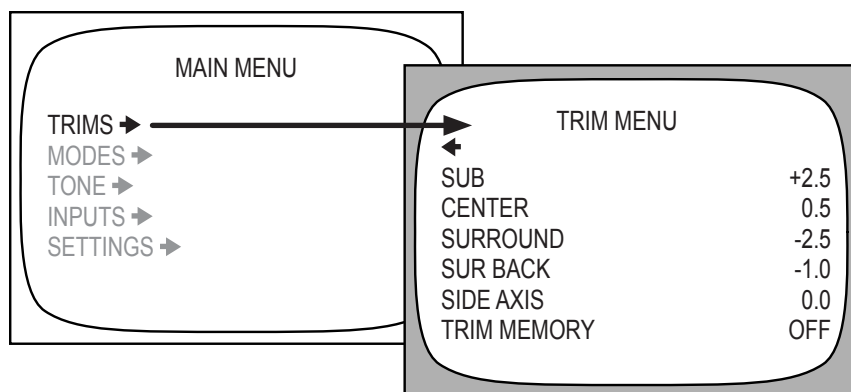

Step up and down
through the menus



Step through any available
options, and change dB levels

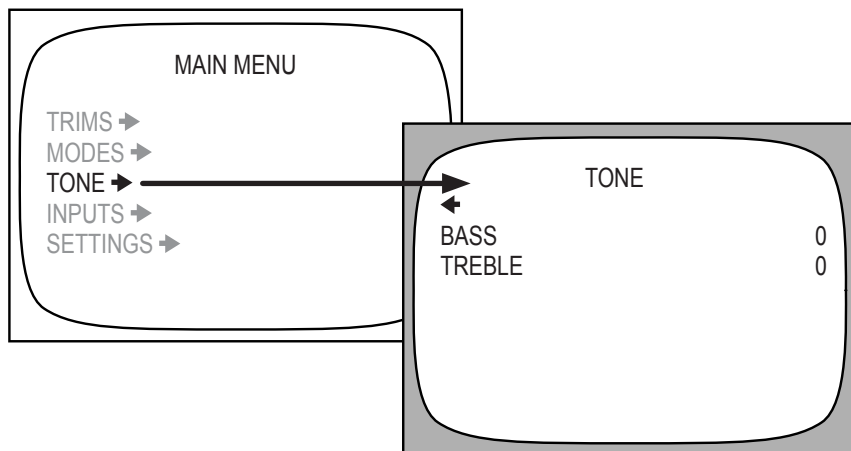

Tone Menu

The Bass and Treble can be boosted or cut by up to 10 dB.

Trim Menu

This menu allows you to adjust the individual volume level of your speakers "on-the-fly." Although careful calibration is key to a good home theater, the trims allow fine adjustment of the current program playing. The trims add or subtract from the reference levels set during calibration using the Speaker Calibration menu. Recalibrating will reset these on-the-fly trims to zero.

The trims do not exceed +10 dB and are not less than -20 dB. The trim dB levels appear in the front panel display during adjustment.

The center, rear and sub trims can also be adjusted using Page 2 of the remote's TGR-3 menu (see page 26).

TRIM MEMORY

If ON, the trims are stored in memory and are recalled during power turn on. If OFF, the trim setting will be lost when the power is turned off.

Note: There are separate subwoofer trims for Dolby, DTS and two-channel modes:

Dolby Technologies

When you play discs encoded in Dolby Digital and adjust the subwoofer trim, the TGR-3 remembers that setting and uses it the next time you play these discs.


DTS

When you play a DTS disc and adjust the subwoofer trim, the TGR-3 remembers that setting and uses it the next time you play a DTS disc.

Two-Channel

This is true for all two-channel modes as a group: if you play a CD or the tuner, etc., and use Stereo, Dolby Pro Logic, DTS Neo:6 or Party, and adjust the subwoofer trim, then that setting will be used when any 2 channel source is played in future.

Modes Menu

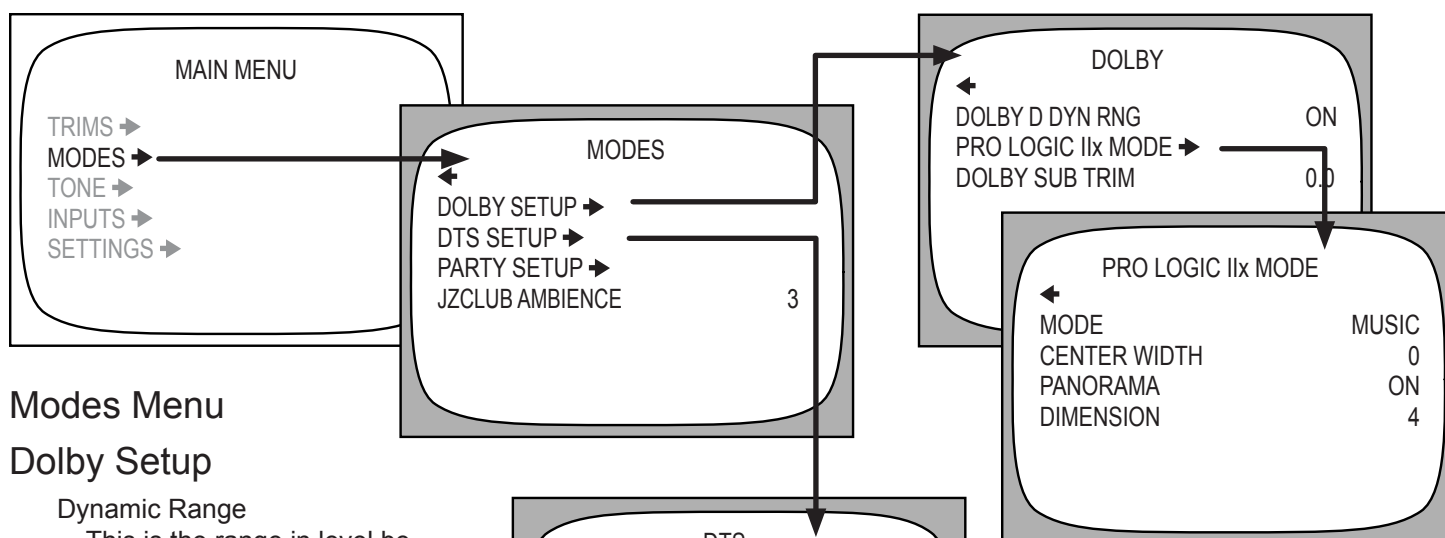

Modes Menu

Dolby Setup

Dynamic Range

This is the range in level between the loudest sound and quietest sound during Dolby Digital and DTS playback only. The options are Quiet (narrow range), Medium (average range) and Large (wide range). Select Quiet for late night listening if you do not want to disturb anyone. Select Loud for full dynamic range.

Dolby Pro Logic Mode

Select this for Dolby Surround playback, or to enhance any stereo program. A second menu will show the available options.

Dolby Sub Trim

Adjusts the subwoofer level specifically for Dolby source material. There are separate subwoofer trims for DTS and 2-channel source material.

DTS Setup

DTS LFE

Set your subwoofer (LFE) channel for either Cinema or Music during DTS playback. In the Cinema setting, there is no change to the DTS subwoofer level from that mastered on the DTS disk. For the Music setting, there is a 10 dB reduction, necessary to accurately match the levels on DTS music discs.

DTS Neo:6

This allows you to select either Cinema or Music for DTS Neo:6 playback. These two options are described in more detail on page 43.

DTS Sub Trim

Adjusts the subwoofer level.

Party

This mode allows you to play a stereo source with multiple speakers. A second menu allows you to select which speakers are present.

Jazz Club Ambience

This adjusts the ambience and effects of the Jazz Club mode, simulating various venue sizes and strength of the rear reflections.

Dolby Pro Logic IIx Mode

Modes

The available modes are :
PLII Music, PLIIx Music,
PLII Movie, PLIIx Movie,
PLII Matrix, and
Dolby Pro Logic.

These are described in more detail on page 43. Note: PLII and PLIIx are on-screen abbreviations for Dolby Pro Logic II and Dolby Pro Logic IIx.

Dolby Pro Logic II Music and Dolby Pro Logic IIx Music modes have three extra options which allow you to create a realistic and natural surround effect from 2 channel sources:

Center Width

This spreads the center channel between the front left and right channels.


Panorama

This wraps the front left and right channels around to the surround channels.

Dimension

This adjusts the balance between the front and surround speakers.

Input Menus

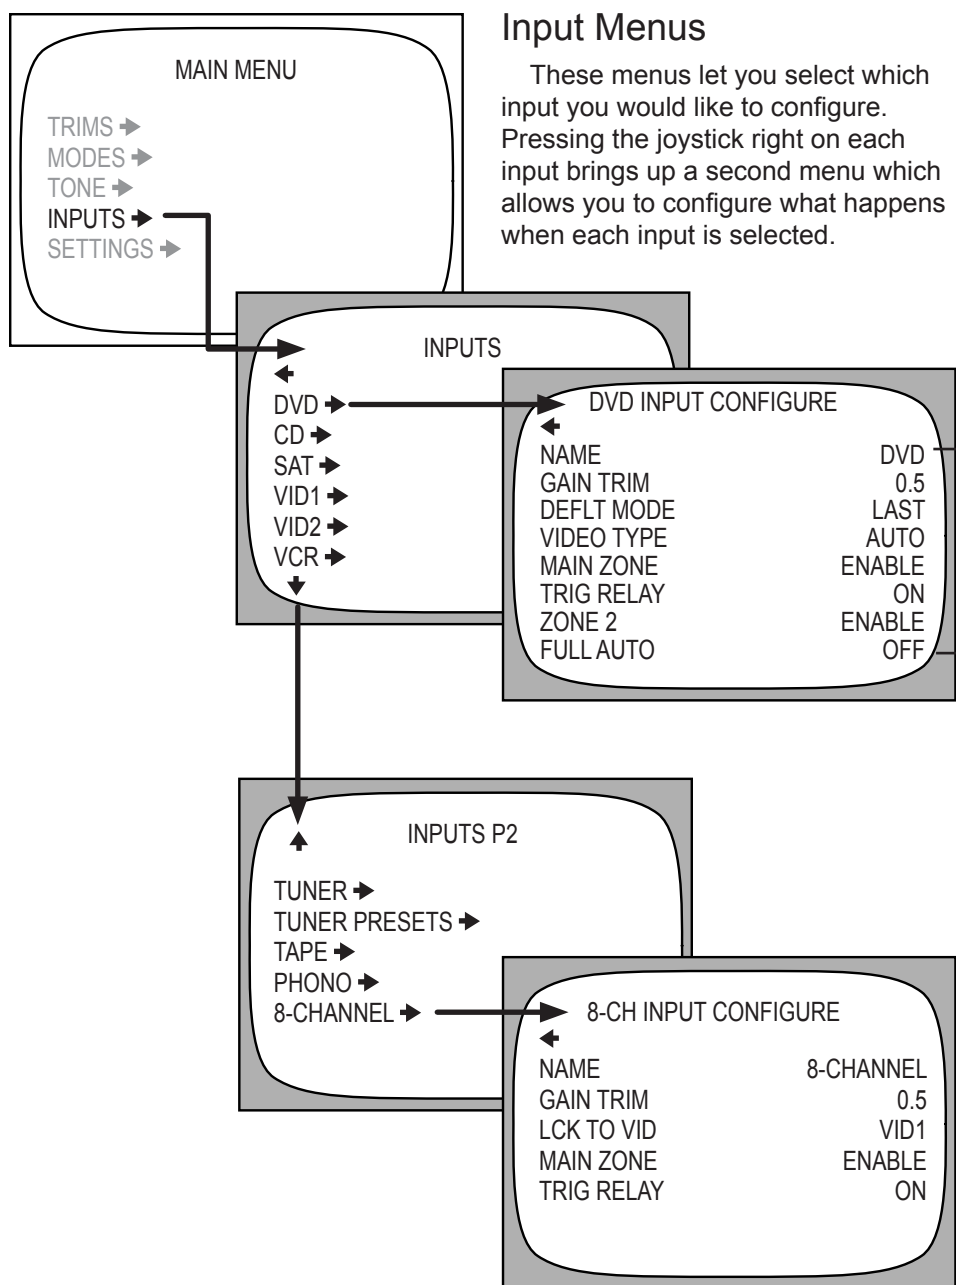

Input Menu

These menus let you select which input you would like to configure. Pressing the joystick right on each input brings up a second menu which allows you to configure what happens when each input is selected.

Input Configuration Menus

Name

Use the joystick up/down, and left/right to change the display name for any input, up to 9 characters. Move fully left when finished.

Gain Trim

Use this to adjust all of your sources to play at similar levels. To prevent overloading, the levels can only be adjusted downwards.

Default Mode

Set the input to a favorite surround mode, or the last mode, or stereo.

Video Type

If you know the type of video used for each input, select the type from CVID (composite), SVID (S-video) or COMP (component). Otherwise, choose AUTO, and the TGR-3 will automatically detect the source type when a video signal is present. There may be some delay in Auto, for certain program material.

Main Zone

Enable/disable the selected input in the Main Zone. You can disable any unused inputs, then it will not play in the Main Zone.

Trigger Relay

The Trigger Relay can be set to turn on whenever the input is selected. This could be used to turn on an amplifier or a video screen for example.

Zone 2

Enable/disable the input in Zone 2. You can select the inputs you wish to play in Zone 2. For example, you might disable the Phono input if nobody in Zone 2 appreciates your vintage collection of Swing 78s.


Full Auto

Select **on**, and the TGR-3 will turn on and select this input whenever this input starts to play. Use **off** for any input which hinders auto operation.

Note: the 8-Channel input menu is slightly different from the other menus:

It allows you to select a specific video input whenever the 8-Channel audio input is selected. Also, this input only works in the Main Zone, not Zone 2.

Tuner Preset Menus

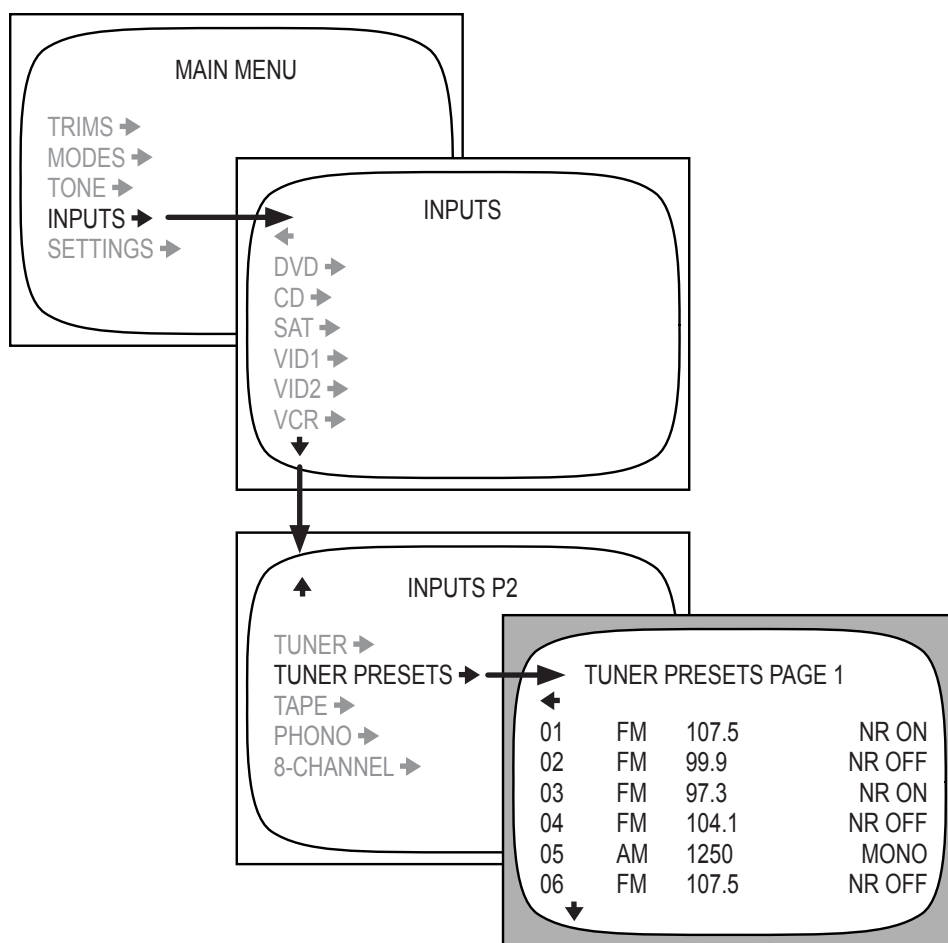


Tuner Preset Menu

This allows you to set the AM/FM band and frequency of up to 40 radio stations. They can be recalled quickly and set as favorite stations on the remote control. See page 45.


For FM stations, try to select the Stereo-NR (noise reduction) for the best reception.

Preset procedure

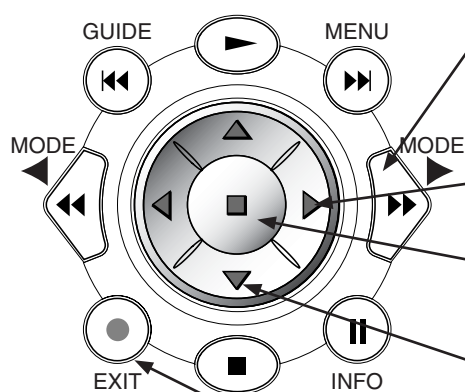

- 1/ Once you are on a preset in the OSD, press the MODE buttons on the remote control to select the band from Stereo FM, Stereo-NR or Mono AM.
- 2/ Then use joystick left and right to change the frequency.
- 3/ Press the joystick center to enter that frequency into preset memory and play that station.
- 4/ Use the joystick down button to move to the next preset down on the screen. The bottom arrow on each screen leads to the next page of presets.
- 5/ Repeat this for all the presets you want to set, then press EXIT when finished.

Main Zone and Zone 2 Menu

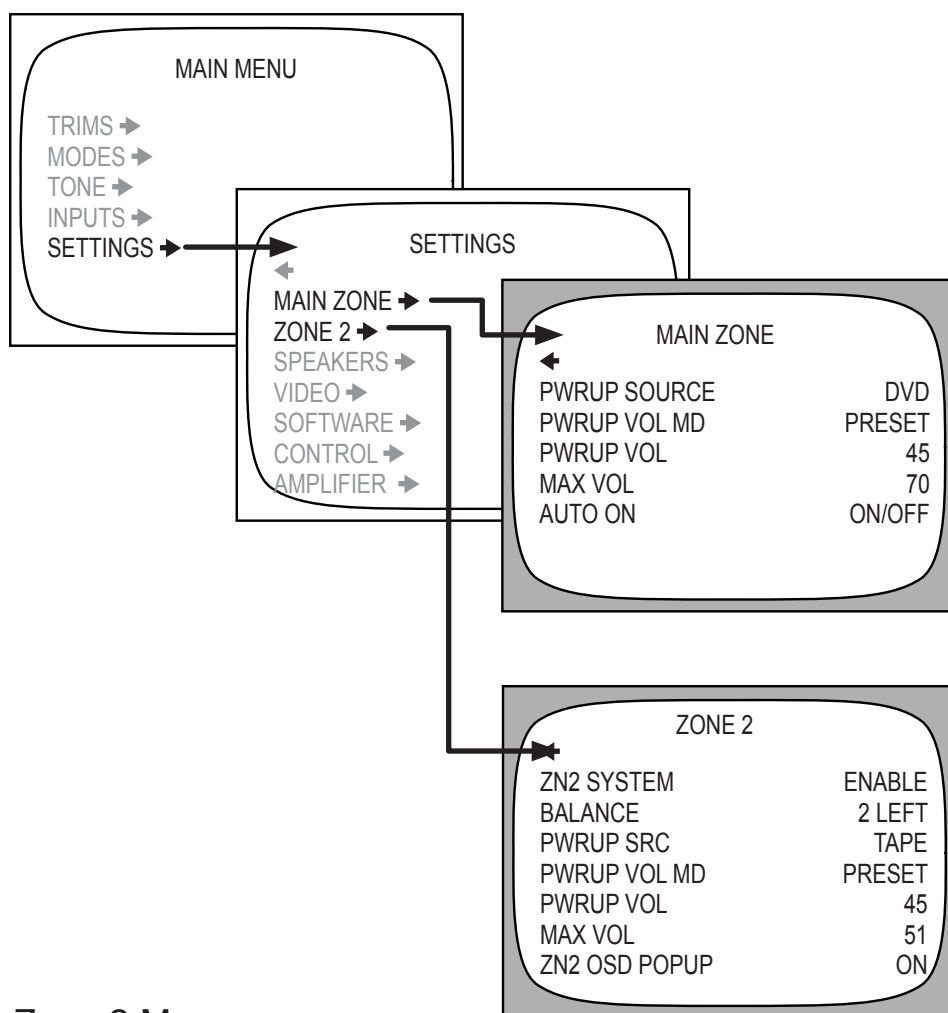

Zone 2 Menu

These settings are like those described for the Main Zone. In addition, the entire Zone 2 can be enabled or disabled, and the stereo balance adjusted with this menu.



Zone 2 is set "disabled" from the factory, so you should use this menu to enable Zone 2 when you are ready to use it.

The Power Up Volume has three options: PRESET, LAST and FIXED. The FIXED option allows you to set the Zone 2 to a fixed volume, not adjustable with the remote. PRESET and LAST are as described for the Main Zone.

OSD popup can be turned on or off with this menu.

Main Zone Menu

PowerUp Source

This sets the input source which the TGR-3 will then always select whenever the TGR-3 is turned on.

Power Up Volume Mode

This lets you choose the volume level the TGR-3 reaches when it is turned on. It ranges from 0 minimum to 100 maximum. You can select from a PRESET level, set below (the power-up volume), or it can play at the LAST level it was playing before it was turned off. The TGR-3 will always turn on at the level set here, but it can

be adjusted to any level afterwards.

Power Up Volume

This allows you to set the PRESET volume level mentioned above. You might want to set it to a low level to avoid any surprises upon turn-on, especially if other users like loud music.

Max Volume

The volume can be set to not exceed a certain level. This is useful if you have sensitive speakers, sensitive neighbors, or you would rather not have others play your system too loud.

Auto ON


When this is ON, the TGR-3 will automatically switch to the next input which starts to play. For example, if you turn on your CD player and press Play, the TGR-3 will switch to CD. When you turn on your VCR and press Play, it will select the VCR input.

You must set FULL AUTO to ON in the INPUT menu, for each input you want to use with this fully automatic feature. (See page 34, at the bottom of the last column.)

If the TGR-3 is turned off while the Auto mode is engaged, it will turn on and select an input whenever an input becomes active. For example, if you turn on your CD player and press Play, the TGR-3 will turn on and select the CD input.

We recommend that you turn off this feature if you are selecting the inputs manually, or recording.

Video, Software and Control Menus

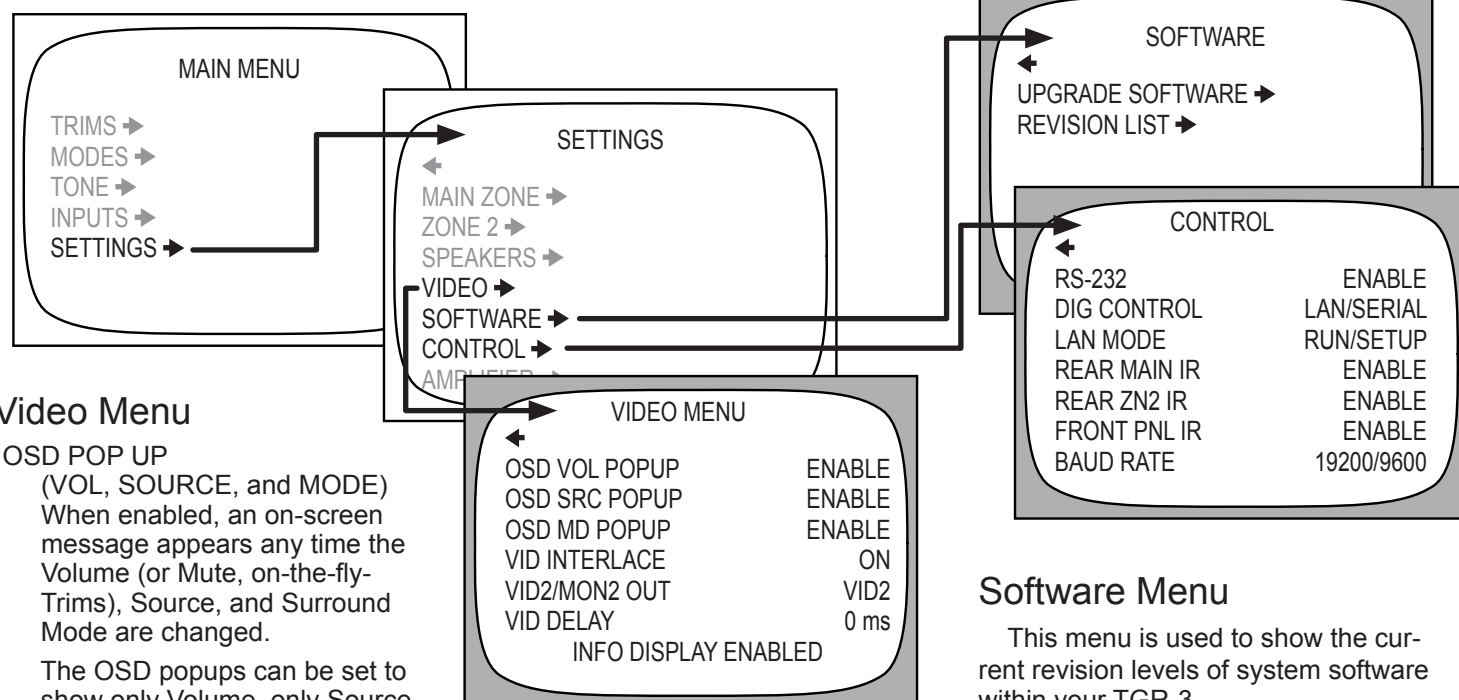

Video Menu

OSD POP UP

(VOL, SOURCE, and MODE)
When enabled, an on-screen message appears any time the Volume (or Mute, on-the-fly-Trims), Source, and Surround Mode are changed.

The OSD popups can be set to show only Volume, only Source, only Mode, or any combination of the three, by setting the menu item to Enable. When all three are disabled, the Info button is also disabled, and a message appears on the bottom of this menu. With all three disabled, the video signal uses the purest path possible to route to the monitor. For example, if you are set to an S-video input and the monitor is on it's S-video feed, then the video is not digitized in the TGR-3. If you are up-converting from a composite video source, or you have pop-ups enabled, then the video path for S-video will always be digitized for smoothest viewing transitions for the OSD popups.

OSD popups are not available on component out when component sources are playing. They are also not available on the HDMI output.

VID INTERLACE

Video interlacing is normally ON, and will work with most monitors and projectors. If you notice any moving artifacts on a paused video picture, try setting this to OFF. This will only effect S-Video and Mon2 Composite outputs.

VID2/MON2 OUT

VID2: the VCR2/MON2 outputs can be used for recording to a second VCR. There is no OSD, and the output is muted when VID2 is chosen as an input (to prevent feedback).

MON2: the VCR2/MON2 output becomes a second monitor output (with OSD) for another TV. It will not mute when VID2 is chosen.

VIDEO DELAY

This adjustment is useful if you have an external video processor in your system. Video signals may become delayed with respect to the audio signals. Although it is called Video Delay, it is actually a delay adjustment of the audio signals relative to the video signals.

Use the remote's joystick pad to adjust the delay in one millisecond steps. An equal amount of delay is added to all audio channels.

Note: The speakers keep their relative time delay settings which the TGR-3 calculates from the Speaker Position Menu settings. The video delay is just added on top. Leave the video delay at zero if you have no external video processor.

Software Menu

This menu is used to show the current revision levels of system software within your TGR-3.

It also allows the TGR-3 Flash memory software to be upgraded by CD, see page 48 for details.

Control Menu

In most cases, there is no need to change these settings (all enabled by default). You should make any changes with caution.


This menu allows you to enable or disable the RS-232 port and the rear panel IR remote control connections.

Dig Control allows you to select if the unit is controlled by LAN (ethernet) or Serial (RS232). The front panel IR receiver can also be disabled if required, but make sure the rear panel IR receiver is working correctly and is still active before doing this.

If you select a baud rate of 19200, the Ethernet jack will need to be configured in it's own setup for 19200 baud (it defaults to 9600).

The front panel IR can be re-enabled by holding down the remote's MENU button for several seconds, while pointing it at the front IR window.

Speaker Size Menu

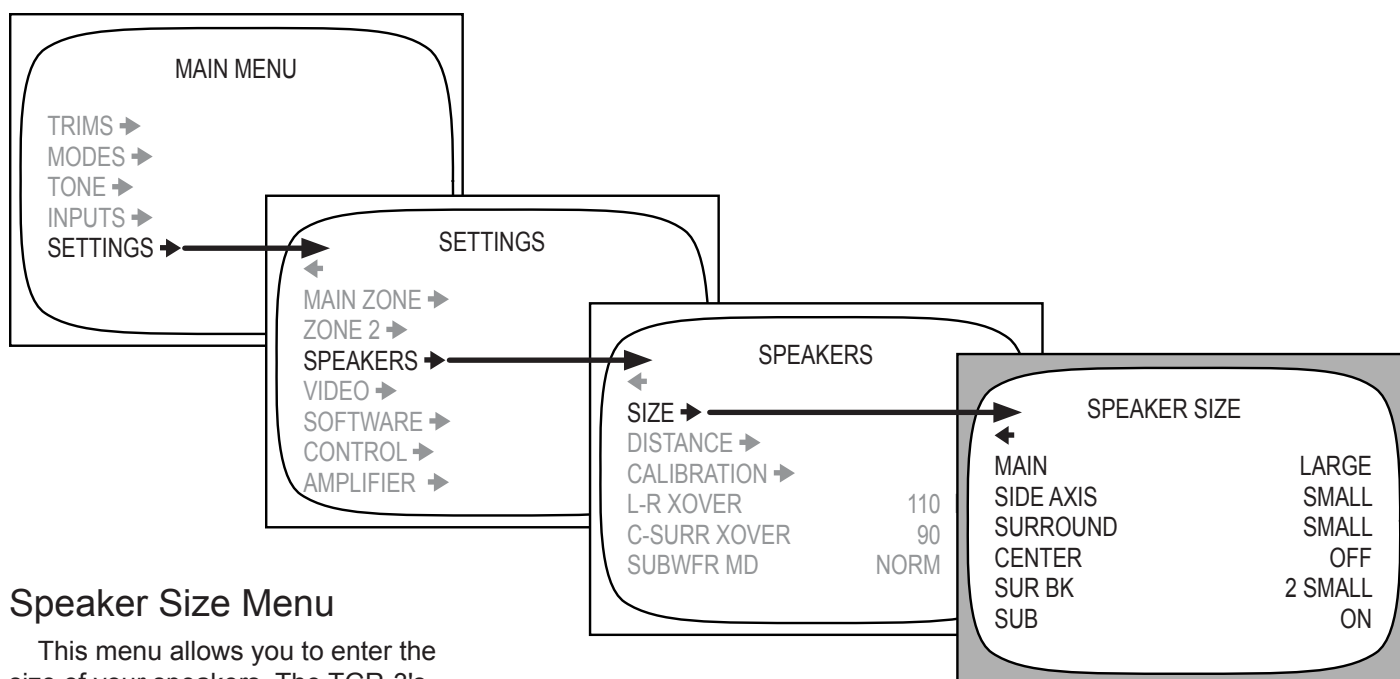



Speaker Size Menu

This menu allows you to enter the size of your speakers. The TGR-3's bass management will then automatically assign each speaker a frequency range: either full range for large speakers or high-pass for small speakers. In the latter case, the low frequency range is sent to the subwoofer.


See page 42 for more details on bass management. See page 41 for information regarding the adjustment of the bass management crossover point.

LARGE or SMALL

With a few exceptions, this option can be applied independently to the main, center, surround and surround back speakers.

- Select **LARGE** for any speakers which are capable of good bass performance. They will then receive the full frequency range. 
- Select **SMALL** for any speakers such as satellites with 5 or 6 inch woofers. They will then receive the higher frequency range above 

the crossover point. Try using **SMALL** even if your speakers are large. This will protect your speakers from low frequency damage and conserve amplifier power.

- The lower frequencies from all speakers set to **SMALL** will be redirected to the subwoofer, in addition to its own LFE channel. 

SIDE-AXIS

- Select **OFF** if you have no side-axis speakers. The size is always the same as the main speakers, so do not set the mains to **LARGE**, if the side-axis speakers are small and not capable of good bass performance.

SURROUND

- Select **OFF** if you have no surround speakers.

CENTER OFF

- In the **OFF** position, the center channel information is redirected to the fronts. This is sometimes known as a "PHANTOM" center channel.

SURROUND BACK


- Select **OFF** if you have no surround back speakers. The information will be shared among the other surround speakers, creating a phantom back channel.

SUBWOOFER ON/OFF

- Select **ON** if you have a subwoofer. It will then receive any LFE signals (from 5.1, 6.1 sources), and the bass from any channels set to **SMALL**.

Note: the bass management does not work for the 8-Channel input, or for Zone 2. Therefore the speaker size settings will have no effect and these channels will always be full range.

Speaker Position Menu

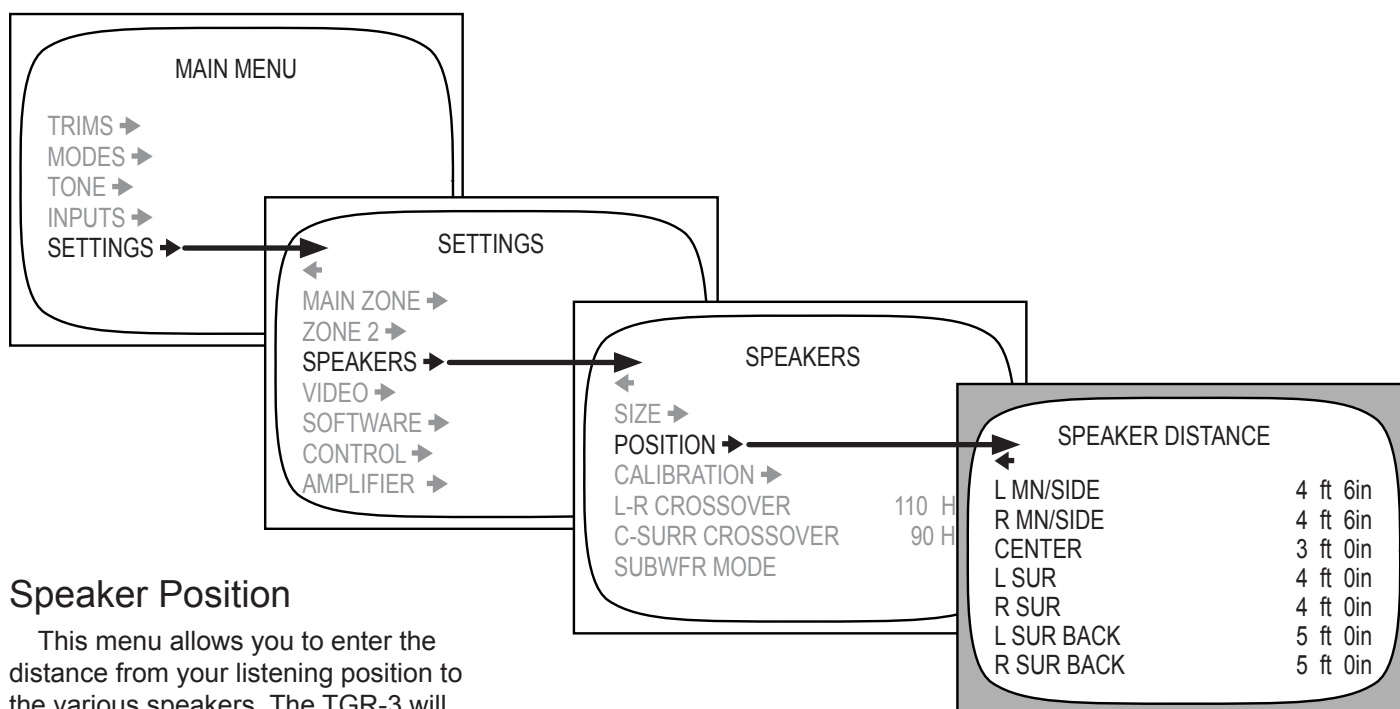

Speaker Position


This menu allows you to enter the distance from your listening position to the various speakers. The TGR-3 will then automatically adjust and correct the speaker delay times. The sound from each speaker should arrive at the listener at the correct time. The distance measurement is not critical, and a visual estimate is usually adequate.

The procedure is as follows:

1. Measure or visually estimate (in feet and inches) how far each speaker is away from the center listening position of your home theater.
2. In the OSD menu, use the remote control joystick arrow buttons to enter the distance in feet and inches for each speaker.
3. The TGR-3 automatically sets the appropriate delays for each speaker so the sounds arrive at the listening position at the correct time.
4. Use this table to record your speaker distance measurements.

SPEAKER	DISTANCE
LEFT MAIN/SIDE	
RIGHT MAIN/SIDE	
CENTER	
LEFT SURROUND	
RIGHT SURROUND	
LEFT SURR BACK	
RIGHT SURR BACK	

Speaker Calibration Menu

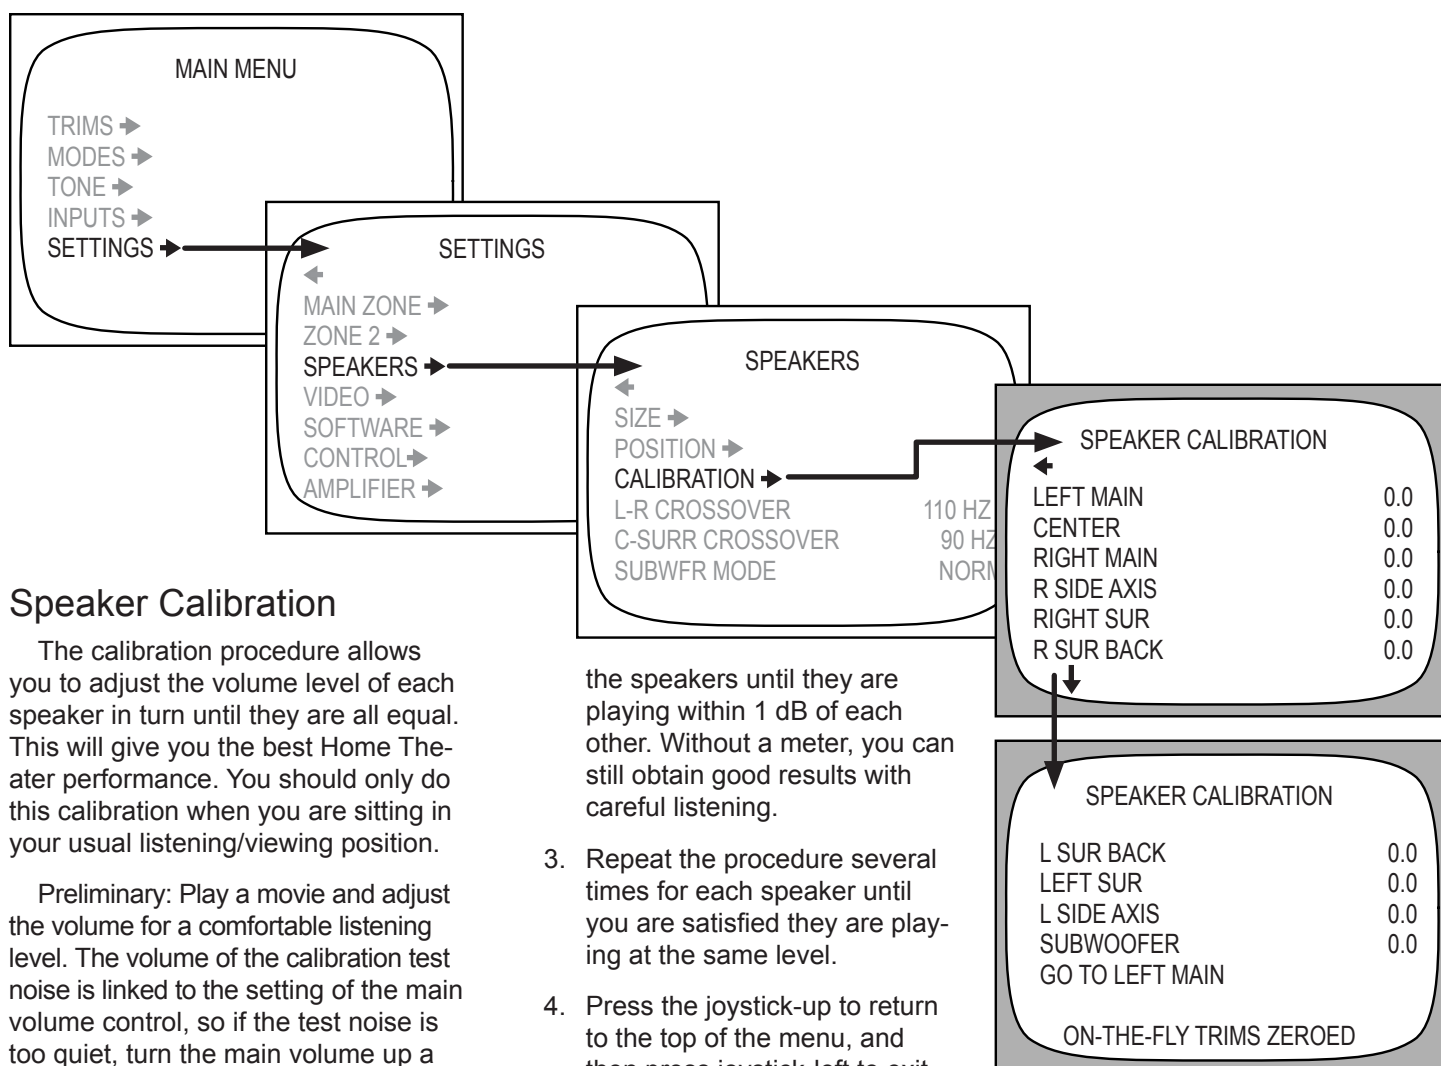

Speaker Calibration

The calibration procedure allows you to adjust the volume level of each speaker in turn until they are all equal. This will give you the best Home Theater performance. You should only do this calibration when you are sitting in your usual listening/viewing position.

Preliminary: Play a movie and adjust the volume for a comfortable listening level. The volume of the calibration test noise is linked to the setting of the main volume control, so if the test noise is too quiet, turn the main volume up a little and retry.

1. Use the OSD to navigate to the **SPEAKER CALIBRATION** menu.
2. Press the remote's joystick down to turn on the noise generator. While the test signal is playing in each speaker, its level can be adjusted using the joystick left/right buttons. Adjust each speaker in turn until they are all equal in volume.

The best results are obtained if you use a Sound Pressure Level (SPL) Meter. This is a hand held meter which will accurately measure and display the sound level. Adjust all of

the speakers until they are playing within 1 dB of each other. Without a meter, you can still obtain good results with careful listening.

3. Repeat the procedure several times for each speaker until you are satisfied they are playing at the same level.
4. Press the joystick-up to return to the top of the menu, and then press joystick-left to exit. The calibration noise generator will turn off.

The main volume control adjusts the volume of all of the speakers up and down at the same time. They keep the same relative levels you set here, that is, they will still be playing as loud or as quiet as each other.


The Dolby Digital, Dolby Surround and DTS soundtracks are designed to be played back in a calibrated Home Theater. The sounds from each speaker will be at the correct relative levels, as the movie sound director designed them. Repeat the calibration if you change any external power amps or speakers, or if you move your couch relative to the speakers.

The range of adjustment is ± 10 dB (in 0.5 dB steps) for each speaker.

Record your levels here:

SPEAKER	dB LEVEL
LEFT MAIN	
CENTER	
RIGHT MAIN	
RIGHT SIDE AXIS	
RIGHT SURROUND	
RIGHT SURR BACK	
LEFT SURR BACK	
LEFT SURROUND	
LEFT SIDE AXIS	
SUBWOOFER	

Speaker Crossover Menu

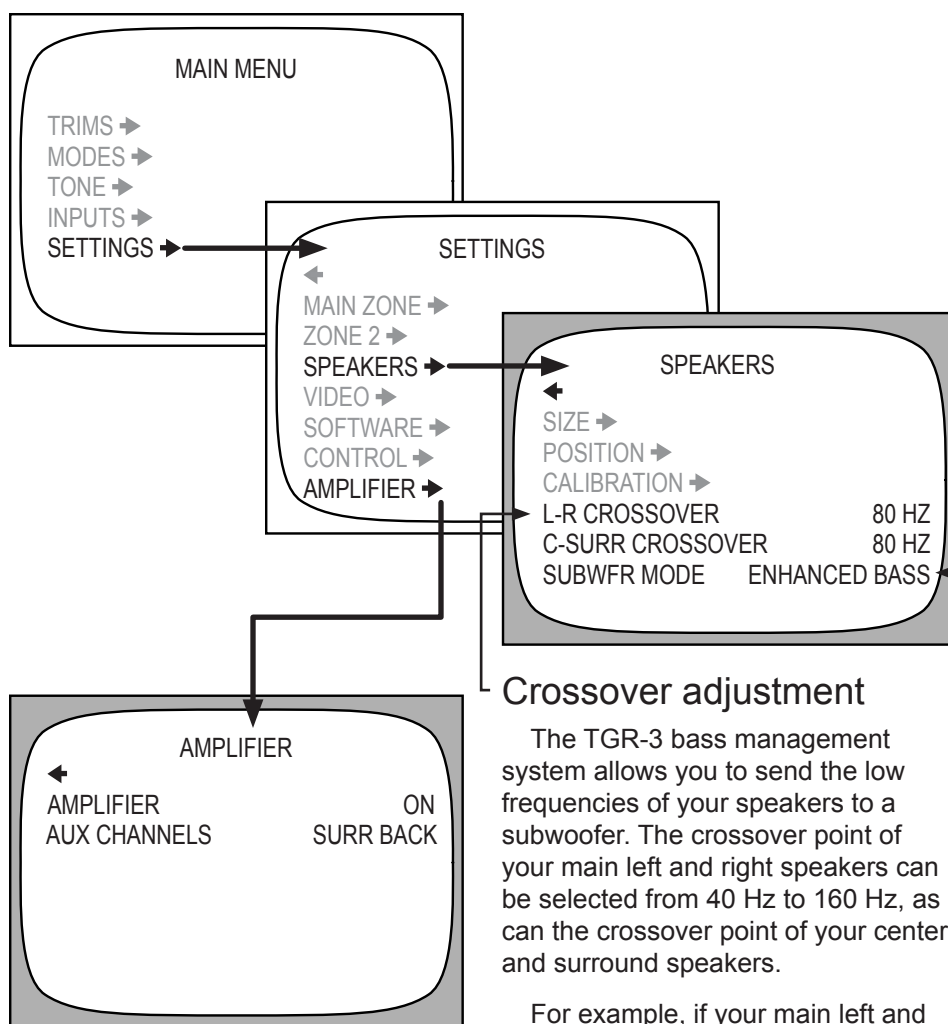

Amplifier Menu

The TGR-3 has two auxilliary amplifier channels which can be used to power the surround back, side-axis, or Zone 2 speakers. This menu allows you to select which of these is sent to the Aux amplifiers. You can also turn the amplifiers on or off with this menu.

Crossover adjustment

The TGR-3 bass management system allows you to send the low frequencies of your speakers to a subwoofer. The crossover point of your main left and right speakers can be selected from 40 Hz to 160 Hz, as can the crossover point of your center and surround speakers.

For example, if your main left and right speakers are a bit lacking in bass response, you can set the speaker size to SMALL, and set the L-R crossover to 40 Hz. The subwoofer will then receive the lower bass range, (not well reproduced by your front speakers). This will not affect the range sent to your center or surrounds.

A setting of 80 Hz is a good starting point if you are not sure of the response of your speakers. In this example:

- The subwoofer receives frequencies below 80 Hz, from all speakers whose size is set to SMALL.
- All speakers set to SMALL, receive frequencies above 80 Hz.

Subwoofer Mode


The subwoofer output can be set to Normal, or to an Enhanced Bass mode.

The Enhanced Bass mode provides an output to your subwoofer even when you are listening to a stereo source with main speakers set to LARGE. In the Normal mode, there would be no subwoofer output in this case, and the bass would only come from the main speakers.

The Enhanced Bass mode has no effect if the main speakers are set to SMALL, as the subwoofer is automatically engaged. It also has no effect in 5.1 or greater surround modes.

Most manufacturers provide a -3 dB specification for their speakers. This is the frequency where the speaker's output has dropped by 3 dB. Set the TGR-3's crossover to this frequency or above. If you cannot find this, set the crossover to 80 Hz (the default).

Set your subwoofer's own cross-over control to maximum frequency or bypassed mode. If it is set lower than the TGR-3, there would be a hole in the mid-bass, and bass information would be missing.

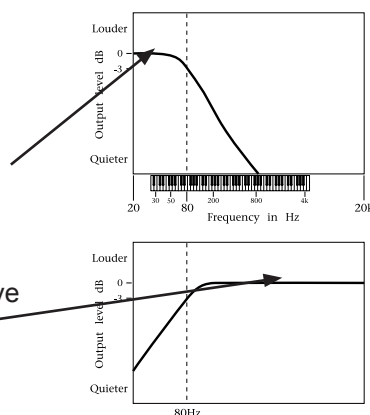



Using the TGR-3

Bass Management

Unlike higher frequencies, it is difficult to discern exactly from which direction lower bass is coming from.

The TGR-3 has a bass management system that takes advantage of this effect. It allows you to choose whether your speakers will play the full frequency range, or if the bass will be redirected to the subwoofer.

The advantages of redirecting the bass to a subwoofer are :

- The overall bass of the system is improved as subwoofers, such as Sunfire's powered True Subwoofers are specially designed for this frequency range.
- The subwoofer can simultaneously play the bass from all of the speakers, in addition to it's own low frequency effects channel (LFE).
- There is no loss in perception of the position of movie or music sound effects, as the ear cannot easily locate the position of bass sound sources.
- Smaller speakers can be used for front, center and surrounds, as they do not have to reproduce the low frequency range. This leads to a saving in speaker expense and room space. Note that a subwoofer is required if the front speakers are set to SMALL.
- The TGR-3 amplifiers do not waste power reproducing the low frequency range.

See the previous page for information regarding the adjustment of the bass management crossover point.

The SPEAKER SIZE menu is used to set the bass management correctly for your speaker system. See page 38.

NOTE: Dolby Digital and DTS modes are designed especially for complete systems with front, center, and surround speakers and subwoofers. You need all of the speakers to get the best performance from your Home Theater. If you do not have a subwoofer connected, then you should not use the bass management system (so set all the speakers to Large). Without a subwoofer, you will be missing the 5.1 LFE (low frequency effects) information.

Considering the advantages of the bass management system, you might try setting all of your speakers to Small, even if they are capable of good low-frequency performance.

Video Conversion

The TGR-3 has advanced digital video DSP circuitry and coding which allows the following:

- Up conversion from composite video inputs to S-video and component video outputs.
- Up conversion from S-video inputs to component video outputs.
- Down conversion from S-video inputs to the MON2 composite video output jack.

The video conversion makes the TGR-3 able to switch all of your video sources, making it the central controller for all of your audio and video entertainment.

For example, suppose you have your TV connected to the component video outputs of the TGR-3. Any of your other video sources can be connected to the TGR-3, even those which do not have component video. The TGR-3 will convert any composite and S-video sources to component video.

Notes:


- Do not connect both composite and S-video inputs on the same TGR-3 input. Always connect the highest quality video source type.
- The quality of the converted output is limited by the quality of the original source.
- The Tuner, Tape and Phono inputs do not have video inputs. When these are selected, the video stays on the last selected video source.
- The TGR-3 has sophisticated video circuitry that requires it to be pre-configured for only one type of television broadcast standard. For US models, this is NTSC and for export models, this is PAL-BGHI.

Surround Modes for 2-Channel Sources

For 2 channel input sources, you can choose from the following modes:

STEREO
DOLBY PRO LOGIC II
DOLBY PRO LOGIC IIx
PARTY
JAZZ CLUB
DTS Neo:6
SOURCE DIRECT

The mode selection can be made from the front panel MODE buttons, or from the remote control.

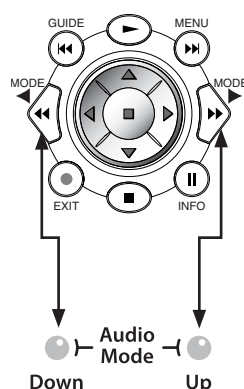

STEREO

This is the conventional two-channel stereo mode with sound from your left and right speakers. The TGR-3 bass management lets you use your subwoofer to handle the lower frequency range.

We recommend that you try the HOLOGRAPHIC IMAGE when using stereo sources.

DOLBY PRO LOGIC II and DOLBY PRO LOGIC IIx

These modes allows you to enjoy many of the benefits of Dolby Digital (and Dolby Digital EX) from your stereo sources.

DOLBY PRO LOGIC II features enhanced realism from full range stereo surround channels. Use this mode to listen to your stereo sources in 5.1 surround sound. It has two options, Movie and Music, which can be set using the On Screen Display (OSD) menus.

In **MOVIE** mode, Dolby Surround soundtracks are decoded by the TGR-3 into separate channels: left and right channels for off-screen imaging, a center channel for most on-screen dialog, and stereo surround channels for ambience and special effects. This is the mode to use for any surround-encoded material.

Try **MUSIC** mode for all of your stereo programs, and adjust these extra options to suit your taste:

Center Width spreads the center channel across the front soundstage.

Panorama wraps the left and right channels around you.

Dimension adjusts the front/rear balance.

DOLBY PRO LOGIC IIx extends the Dolby Pro Logic II technology by adding stereo full range surround back channels. Use this instead of Dolby Pro Logic II if you are using the surround back channels in your system. This also has Movie and Music options as described above.

DOLBY PRO LOGIC mode emulates the original standard surround mode. It can be used for source material which is not of optimum quality, or if you just feel nostalgic for the way things were.

PLII MATRIX mode can be used for mono sources, or for FM programs with poor stereo reception.

PARTY

This extra stereo mode copies the front speaker signals to the other speakers in your system. This mode adds tremendous presence to your stereo sources and is great for parties and casual listening alike. The OSD menu can be used to select which speakers are active in this mode.

JAZZ CLUB

In this DSP mode, the surrounds simulate the ambience caused by rear reflections and effects of a small to medium sized venue. This is useful for adding surround sound effects to stereo sources. The ambience effect can be varied using the OSD MODES menu.

DTS Neo:6

The **CINEMA** option can produce up to six full range, separate channels and a subwoofer output from stereo matrix surround sources. This enhances the playback of sources such as surround sound video tapes, Laser Discs and broadcast TV programs.

The **MUSIC** option can expand normal stereo programs into six channels. It does so in a natural sounding way, which enhances the listening experience.

SOURCE DIRECT

This mode bypasses all DSP, Tone, and bass management circuits. It is stereo analog only, and offers the shortest signal path through the TGR-3. Only the front left and right speakers are engaged. Do not use this mode for digital-only sources, as it only routes the analog audio. To prevent damage to your speakers, this mode only works if your front speakers are set to Large.

In addition to these modes, and those offered for multi-channel sources, the side-axis speakers will widen the front sound stage and fill in the sound field between the front speakers and the surrounds. Note that the side-axis speakers are active in stereo as well as multi-channel operation.

The **Holographic Image** can also be selected for any 2 channel or multi-channel source for enhanced realism and depth.



Surround Modes for Multi-Channel Sources

For multi-channel sources, the TGR-3 will automatically select the correct mode from one of the following:

DOLBY DIGITAL
DOLBY DIGITAL EX
DTS
DTS-ES MATRIX
DTS-ES DISCRETE

Dolby Digital and DTS are "5.1" surround systems with five main channels: left front, center, right front, left surround, and right surround. Each channel can play the full frequency range and is independent of the other channels. The ".1" denotes the subwoofer channel which plays the low frequency effects (LFE), also independent of the other channels.

Dolby Digital EX and DTS ES offer "Extended Surround." Both systems offer a surround back channel which effectively fills in the otherwise empty soundspace behind you.

If you want to try one of the modes on the previous page, you should select a 2-channel output from your DVD player's options menu.

NOTE: In your DVD player's audio setup menu, set the digital output to **BITSTREAM**. If this is not set correctly, the TGR-3 cannot decode the digital information.

DOLBY DIGITAL (5.1)

This mode is available if the TGR-3 automatically detects a Dolby Digital encoded source on the currently selected input. You should look for the Dolby Digital Logo on DVDs, LaserDiscs and other sources.

Many DVDs have the option of a Dolby Surround, Dolby Digital or Stereo soundtrack. Follow the instructions in your DVD player's manual to output Dolby Digital bitstreams. Dolby Digital must often be selected from the Disc's menu.

DOLBY DIGITAL EX (6.1/ 7.1)

Dolby Digital EX mode is primarily for playback of Dolby Digital Surround EX encoded soundtracks. One advantage over Dolby Digital playback is that it fills in the area behind you with a completely separate full-range channel.

The TGR-3 has the option of connecting one or two surround back speakers. The calibration and speaker size options can create a seamless surround field.

If you have no surround back speakers, the extra information is sent to the standard surrounds and no material is lost. (Set the surround back speakers to OFF in the SPEAKER SIZE menu).

The TGR-3 will also create the surround back channel if you are playing a 5.1 source.

DOLBY DIGITAL with PRO LOGIC IIx

Besides Dolby Digital and Dolby EX, you may change the Mode during Dolby Digital playback using the Mode keys on the remote or front panel, to Dolby Pro Logic IIx Music and Dolby Pro Logic IIx Movie. These two modes create enhanced stereo back surrounds. Listen to each Mode to determine which sounds best on a given movie.

Dolby Digital uses a maximum of 5.1 channels and does not support surround back channels. Dolby EX supports a **mono** surround back channel (or **dual-mono** surround back channels if both left and right surround backs are used). Dolby Pro Logic IIx Movie is not an optional mode when the surround back channel is configured for only one speaker.

Dolby Digital plus Pro Logic IIx Movie or Music uses the Dolby Pro Logic IIx decoder to create a **stereo** surround back soundfield

from the stereo content of the left and right surrounds. For example, Dolby Pro Logic IIx Movie directs or "steers" some of the left surround signal to the left surround back, whereas Dolby Pro Logic IIx Music lets the left surround remain intact and fills in the left surround back with additional material.

Although movies are encoded with either Dolby Digital or Dolby EX, many sound even better when using the Dolby Pro Logic IIx modes. Try it out.

DTS (5.1)

This mode is available if the TGR-3 automatically detects that a DTS encoded source is present at one of its digital inputs. Look for the DTS Logo on DVDs, LaserDiscs, CDs and other sources.

Make sure that you set your player to output DTS bitstreams. DTS must also be selected on the disc's menu.

DTS ES (6.1)


All DTS-ES sources have the surround back channel matrixed in the left and right surrounds. Newer DVD releases also have a discrete surround back channel, in addition to the same information matrixed.

DISCRETE ES sources: the TGR-3 DTS-ES discrete decoder will decode the discrete surround back channel. It also removes the surround back matrix from the left and right surrounds, and restores them to be fully independent channels.

MATRIX ES sources: If there is no discrete surround back channel, the TGR-3 decodes the matrixed surround back channel from the left and right surrounds, and restores them to be fully independent channels.

Tuner Operation

The Tuner is selected either by rotating the manual input selector on the front panel, or by touching the TUNER button in the remote's TGR-3 mode. The front panel display shows the frequency of the last station you were listening to.

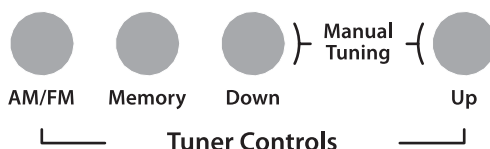

The FM Tuner can tune stations from 87.5 MHz to 108.0 MHz in 0.2 MHz steps (.05 MHz steps for some international models). The AM Tuner range is 530 kHz to 1710 kHz in 10 kHz steps (531 kHz to 1710 kHz in 9 kHz steps for some international models).

Tuner and the OSD

Page 35 shows how to set up the Tuner using the on screen display.

Tuning Stations Manually

Use the front panel AM/FM button to select either the AM or FM band, and then use one of these three ways to tune stations manually:

1. Touch UP or DOWN momentarily to change the tuner by one frequency step.
2. Hold UP or DOWN for a second or so, then release to start the scanning feature. The TGR-3 will scan to the next station, pause on it for a few seconds to allow you to hear what is offered there, and then scan to the next, and so on. Pressing UP or DOWN stops the scanning process.
3. Hold UP or DOWN for an extended period to make the tuner speed across the band without stopping on a station. The tuner will begin scanning for stations when you release the button. Pressing UP or DOWN stops the scanning.
4. When a station is tuned, it can be set as a preset for easy recall, see "Setting the Presets" in the next column.

Recalling a Preset Station

Once you have selected the Tuner, you can quickly recall a station by pressing its preset number, either on the remote's numeric keypad, FAV buttons, or the channel up and down buttons.

Scanning Presets

To scan through the presets, press and hold the FM/AM button. Touch it again to stop the scan.

Saving Presets:

1. Navigate to your favorite station with the UP/DOWN buttons.
2. Press MEMORY once. The preset choice will go to the next available one.
3. Within 5 seconds, press MEMORY again to save the current frequency as a preset, or else use the UP/DOWN buttons to find another preset number, then press MEMORY to save it.
4. The UP/DOWN buttons usually tune the frequency, but when loading the presets, they navigate the presets.

Record your favorite stations here:

Preset	Station	AM	FM	NR
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				



Recording

Recording to a Tape Player


Input signals from an audio source playing in the TGR-3 can be recorded using the left and right audio outputs. The tape player will receive a straight copy of the analog source signal going in, unaffected by the volume, tone or any surround modes. If you are playing a digital source, the tape player will receive a downmixed stereo analog signal for recording.

- Turn OFF the Fully Automatic mode. This is because some tape decks, such as three-head decks, will have an output signal going into the TGR-3 during recording. The DAT or TAPE inputs may be incorrectly selected as an input, rather than the source you are trying to record.
- Manually select the source such as CD and play it through your system.
- Set your tape player to record and adjust the input levels for the best performance. Once the levels are correct, you can reset your source to the beginning and make your recording.
- Do not select another Main Zone input while you are recording.

Recording to a VCR

Any video source playing in the TGR-3 can be recorded using the left and right audio and the video outputs. The VCR will receive a straight copy of the source signal going in, unaffected by the volume, tone or any surround modes.

- Select the video source and play it through your system.
- Set your VCR to record.
- Do not select another Main Zone source while you are recording.
- The VID2/MON2 output can also be used for recording, but first make sure that it is set to VID2 in the VIDEO menu of the OSD (see page 37). This output will then mute to prevent feedback whenever the VID2 input source is selected.
- Do not use the OSD while recording as the incoming video is shut off while the OSD is displayed

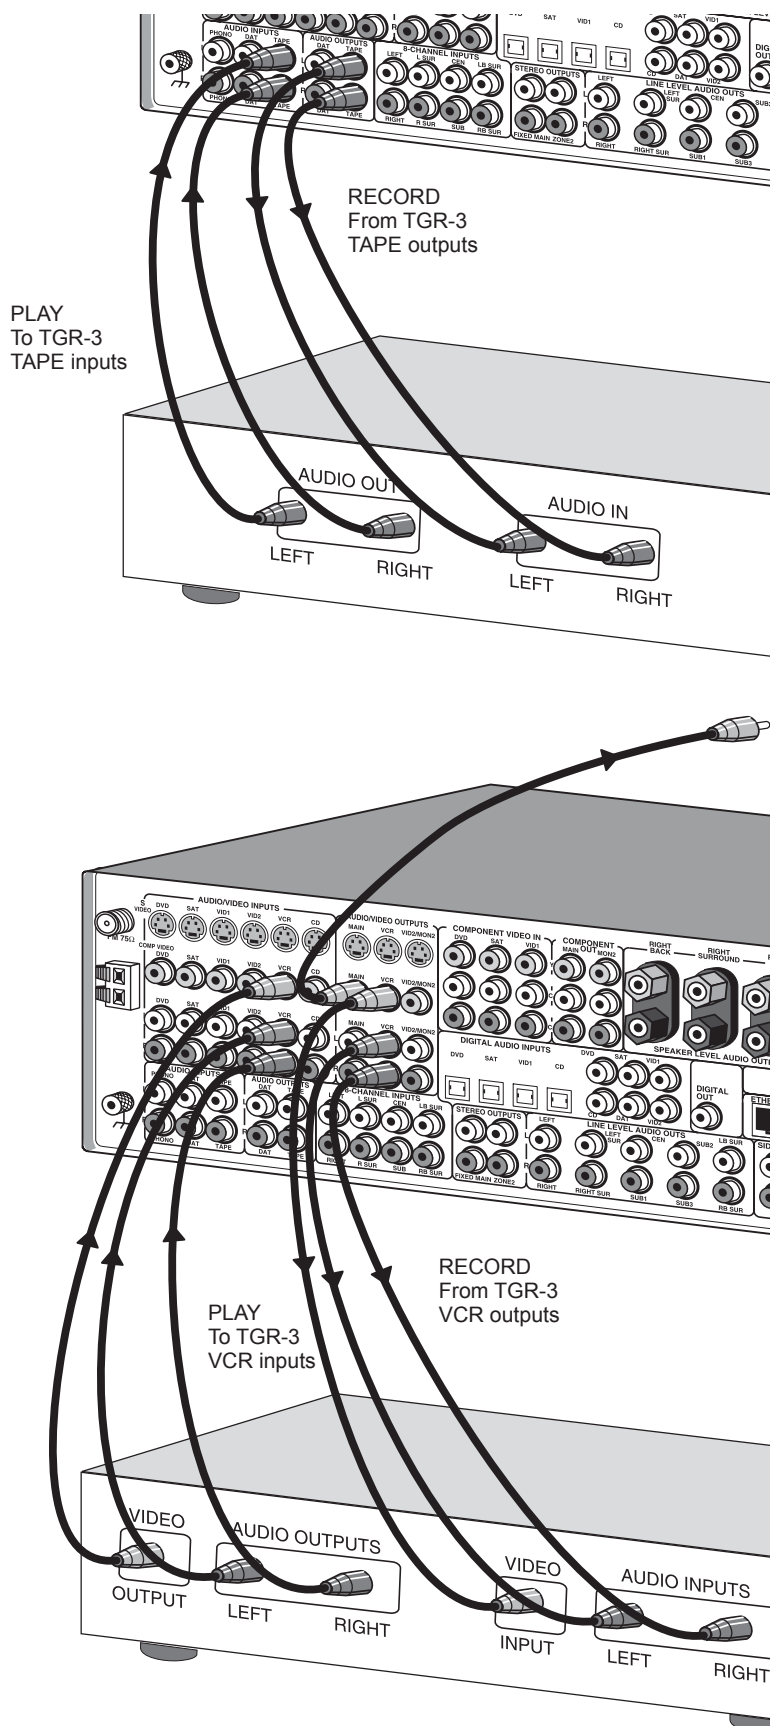

Zone 2 Operation

Note: Zone 2 must first be enabled using the OSD (see page 36), or it will not work. Zone 2 can be turned on even if the Main Zone is off.

If you have a pair of speakers in a second room or area (Zone 2), they can play a stereo source independent of what is playing in the Home Theater room (Main Zone). You can also play the same source as selected in the Main Zone.

The Zone 2 speakers can be powered by the TGR-3's internal amplifiers, or by an external power amplifier.

Zone 2 plays stereo sources, and is unaffected by the Tone controls, DSP, Holographic Image, surround modes or bass management.

Connections

The connections for Zone 2 are shown on page 24.

Note: Zone 2 can play analog sources independent of what is playing in the Main Zone. It **cannot** play from a digital-only source unless that input is selected and playing in the Main Zone. To play a source such as a DVD player in Zone 2 independent of the Main Zone, make sure you connect the player's L-R analog audio output to the TGR-3.

Indicators

The front panel has two LEDs to show the Zone 2 status:



Zone 2 ON

This LED is always on when Zone 2 is on.

If it is off, there will be no output to the Zone 2 amplifier.

Zone 2 Adjust

This LED turns on whenever the Zone 2 source or volume is being changed. Note: if this is on, then

any adjustments you make of volume or input, will affect Zone 2, not the Main Zone.

In addition to these LEDs, the front panel display will show the input and volume adjustment.


Turning on Zone 2

Use the On Screen Display in the Main Zone to check that Zone 2 is enabled. (See page 36, middle column for details). This enables the Zone 2 system, but it still has to be turned on.

Press the remote's ZONE 2 button. The remote's POWER, VOLUME and MUTE buttons then work for Zone 2. The remote display changes as follows:

PAGE 1


This allows you to select the inputs to play in Zone 2. Z2MAI (main) allows Zone 2 to play whatever is playing in the Main Zone.



Press PAGE to show the next page:

PAGE 2

This has discrete codes which are useful if you want to program the remote control with Macros.




Z2 OFF, Z2 ON
Zone 2 on or off.

Z1 Off, Z1 ON
Main Zone on or off.

Z2 BL
Use these two buttons to adjust the left-right balance of Zone 2.

B, C, E, F

These are extra buttons you can Learn over and re-Label with your favorite Zone 2 commands.

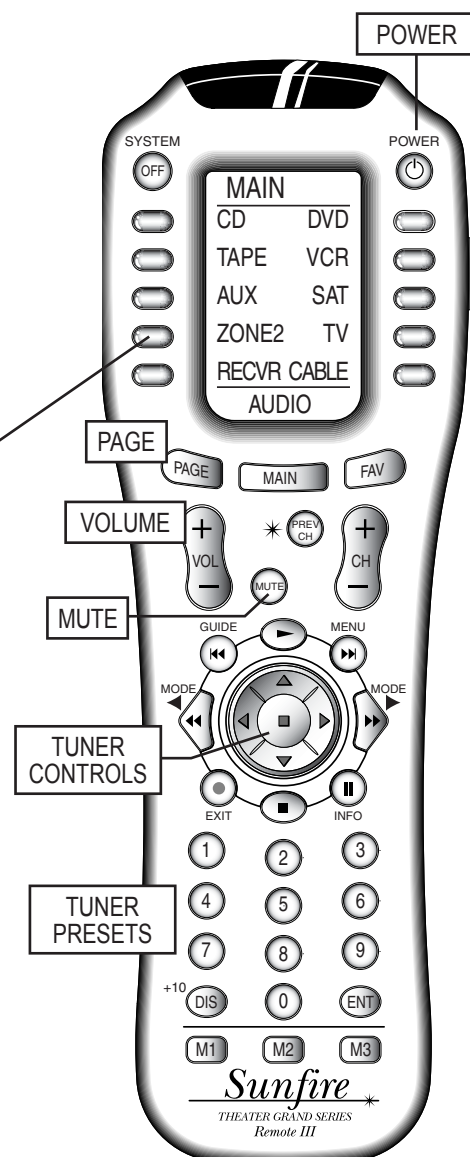

Press MAIN to return to PAGE 1, and press it again to return to the Main Menu.

Note: Zone 2 can also be turned on and adjusted without using the remote. Press the Zone 2 button on the TGR-3 front panel, followed by Power, to turn it on (or off), or adjust the input source or volume.

Zone 2 operations will work even if the Main Zone is off.



Sonic Holography

Sonic Holography is a unique process which enhances the three-dimensional effects and realism of stereo sound. This is modeled in DSP, from a design based on Bob Carver's legendary (and much sought after) Carver C-9 Sonic Holography Generator.

This circuit was designed to overcome a problem in obtaining accurate sound reproduction:

In a stereo system, both ears will hear the output from both speakers. The left ear hears sound from the left speaker and from the right speaker. To see a problem with this, compare what happens when listening to a live musical performance:

During a concert, each ear will receive one direct sound arrival. For example, a cymbal crashes, both your ears will hear it and the brain tells you accurately the position of the musician. In a stereo recording of the concert, this cymbal crash will be heard from both speakers. The left ear will hear the left speaker, which is fine, but it will also hear the crash from the right speaker. These extra sounds tend to confuse the sense of sound source location.

The stereo effect in a good pair of headphones is enhanced because the left ear only hears the left headphone, and the right ear hears only the right headphone. There are no extra sound arrivals.

To summarize :

1. A real musical event will create only two direct sound arrivals, one at the left ear and one at the right.
2. Stereo playback will give four arrivals , as both speakers are heard by each ear. These second sound arrivals reduce our naturally accurate sense of positioning.

The Holographic Image circuit was designed to cancel out the unwanted second arrivals. The left ear will mainly hear the left speaker and the right ear mainly hears the right speaker. This is accomplished by sending a complex crosstalk signal from the left and right speakers in addition to the normal program. These extra signals are virtually identical to the unwanted second sound arrivals but they are out-of-phase with them and they cancel each other out.

The result is a more three-dimensional and wider soundstage, where the positioning clues are restored. In a way, the musicians have been freed from the confines of the flat plane between the speakers. You will perceive them as playing forward or playing behind the speakers or to one side or the other, not just somewhere in between. We recommend that you experiment with its effect, remember that you are listening for a more accurate sense of the location of the different musicians.

Because the Holographic Image works by phase cancellation of the unwanted second sound arrivals, accurate speaker positioning is required. You must make sure that the left speaker is the same distance away from you as the right speaker. Follow the front speaker placement on the next page to get the best results. This is the same as any standard stereo system, only with more care taken to position the left and right speakers accurately.

The Hologram circuit can be engaged using the remote control or from the front panel. There is a short mute period until the circuit is fully engaged or disengaged.


Software CD

The TGR-3 Flash memory software can be upgraded by connecting your PC to the TGR-3's RS-232 serial port, and downloading any available update files from our website: www.sunfire.com. This is the preferred method, as the software can be updated fairly quickly. See page 51 for more details.

Alternatively, the TGR-3 software can be upgraded using a CD available from Sunfire Technical Support. This CD will be available periodically if there are major software changes since the initial release.

The following notes show the CD upgrade procedure. The CD or DVD player must be connected to the TGR-3's digital audio inputs.

1. Turn on your TV, your CD player and the TGR-3.
2. Use the TGR-3 remote to select the On Screen Display.
3. Go to the Settings Menu and then select the Software Menu.




4. Select "Upgrade Software," which brings up a second OSD menu.
5. On the TGR-3, select the digital input which will play the CD. Press ENT on the remote (bottom right).
6. Press 1,2 and 3 on the remote, then play the CD. The TGR-3 display will show the status as the CD data is transferred into the TGR-3.
7. Turn off the TGR-3 when the software transfer is complete.



Appendix

Speaker Placement

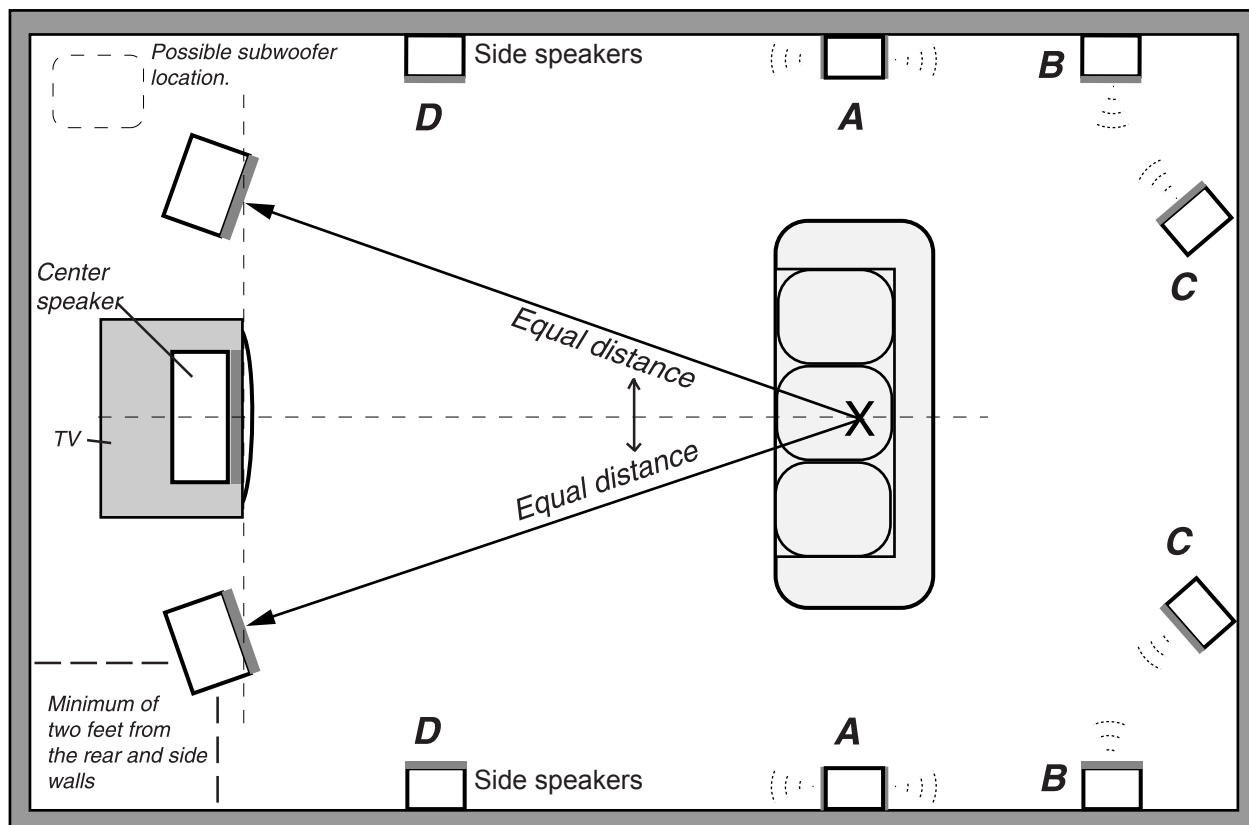

Pair **A** are surround speakers, pair **B** and **C** are surround back options, and pair **D** are side-axis speakers, see the next page.

The Front Speakers

You should closely follow the placement recommendations of your speaker manufacturer, with the addition of the following points:

The left and right front speakers should be positioned so that your TV is exactly centered between them. This will help focus your attention towards the screen.

For the best Holographic Image, the left speaker should be set exactly the same distance and angle away from your listening position as the right speaker. It is recommended that you use a tape measure to set them up to be the same distance away, within about half an inch tolerance.

If you have a smaller TV, the speakers should be no more than two feet away from the sides of the TV.

If possible, have the center, left and right speakers at the same height (within two feet). This will help give a smooth transition when sound effects move from speaker to speaker.

Ideally, the speakers should be no closer than two feet from the rear and side walls, in order to reduce any reflections that might upset the imaging. If your speakers are closer than this, you can experiment by adding sound deadening material such as drapes on the walls to reduce any unwanted reflections.

The Center speaker

Most movie dialog will come from the center speaker, so careful positioning is an important part of a good home theater system. Your eyes and ears should focus your attention towards the center of the screen.

The center speaker can sit on top, or directly underneath the TV, as long as it is located on the centerline and not off to one side.

Position the front face of the speaker close to the front edge of the TV cabinet. (The sound waves may otherwise reflect off the top of the TV cabinet and distort the center imaging).



....Speaker Placement continued

In some systems, two center speakers are used; one on either side of the TV. As they are in mono, the result is a sound image that is positioned exactly at the screen center.

Side-Axis Speakers

The TGR-3's Aux speaker outputs can be configured as two side-axis channels, or you can use an external power amplifier connected to the line-level side-axis outputs. The side-axis signals are matrixed from the left and right front channels, so they are available in stereo as well as surround modes.

Use the OSD SPEAKER SIZE menu to turn the side-axis channels on or off (see page 38). If you want the TGR-3's Aux outputs to power the side-axis speakers, configure the Aux outputs from the AMPLIFIER OSD Menu, see page 41. This menu allows you to set the Aux channels to be either surround back, side-axis or Zone 2 outputs.

- D** Shows the typical placement of the side-axis speakers. You can also angle them in towards your listening position. Place the speakers along the side walls, close to the fronts.

Surround Speakers

Place each surround speaker to be an equal distance away from your central listening position, and keep them at least one or two feet above ear level.

- A** The diagram on the previous page shows the use of dipole surround speakers. These are usually positioned to the side of your listening position. They radiate forwards and backwards and have a quiet null zone which should point towards the listener. The overall effect is that you cannot hear the direct sound from the

surround speakers, just the average soundfield.

Conventional surround speakers can be placed behind the listener, on the rear walls or the side walls. Adjust the angle so they do not point directly at the listener but cause reflections from the sidewalls or the ceiling. This will give the effect of broadening the rear soundstage so that you cannot distinguish the sound as coming from a small box on the wall but from a larger area behind you.

Surround Back Speakers

The TGR-3 has two extra outputs for surround back speakers. These create a wonderful sense of realism in surround effects during playback of Dolby Digital EX, Dolby Pro Logic IIx, and DTS ES.

The TGR-3 can be configured for one or two surround back speakers. Ideally, all the surround speakers should be of the same make and model, and fitted at similar heights to produce a smooth continuous soundfield.

If you are connecting one surround back speaker, connect its amplifier input to the TGR-3 **left** surround back output. Place the speaker behind your listening position.

Subwoofer Location

The TGR-3 has identical output connections for up to three subwoofers.

The best location for a single subwoofer can be found by playing some heavy bass and proceeding as follows:

1. Place the subwoofer right on the seat of your couch or listening easy chair.
2. You can then either run the calibration (noise) signal through it, or simply plug the analog outputs of a CD player directly into your subwoofer's low-level inputs. Turn down the subwoofer's volume level before turning on the CD, then play some of your favorite music samples with heavy bass.
3. Walk around the room, standing in all the positions where you might be able to place the subwoofer. This is usually somewhere close to the corners of the room. Try locations fairly close to the front speakers.
4. Notice where in the room the bass output from the subwoofer sounds the loudest. Shut things down and install the subwoofer there.
5. This is the best position for the subwoofer. The bass will sound the best when you are sitting in your normal listening position.



The RS-232 Port and Ethernet Port

The TGR-3 has a rear panel RS-232 Serial communication port. This allows the FLASH memory to be upgraded to the latest software by connecting to a PC.


The TGR-3 software may be updated to refine operational details and to include new features. Downloadable updates will be posted on our website: www.sunfire.com.

The port can also connect to the serial port of a Home Theater Controller, to operate the TGR-3 remotely.

Communications

Serial RS-232, 9600 Baud, 8-N-1

DB-9 Wiring



PINS 1, 6 and 4 are joined together internally

PINS 7 and 8 are joined together internally

PIN 2- Data from TGR-3 to controller (TGR-3 transmit)

PIN 3- Data from controller to TGR-3 (TGR-3 receive)

PIN 5- Ground/Common

PIN 9- No connection

The RS-232 connector is female.

Serial Cable

To connect the TGR-3 port to a computer, you will need a "straight-through" serial cable. This has connector pins at one end connected directly to the pins of the connector at the other end. For example, pin 1 at one end connects to pin 1 at the other end, pin 2 connects to pin 2, pin 3 to pin 3 and so on.

These common cables are available from most computer stores (or from Radio Shack as # 26-117). It should be 9-pin male at one end, to fit into the TGR-3 and normally

9-pin female at the other, to fit into your computer's serial port (COM1 or COM2).

Update Procedure

1. The current version level of the software running your TGR-3 can be found by looking at the Version Level OSD menu. This is under the Software OSD menu (see page 37).
2. Downloadable updates are on our website www.sunfire.com. If the website file is newer than your current version, follow the website directions and download the new file onto your computer's hard drive.
3. Record your calibration, preset stations or other settings on page 57. In most cases, the upgrade will not affect any of these settings, but it is good to record them just in case.
4. Turn off your computer and the TGR-3. Position them close enough so that they can be easily connected using your serial cable. If you have a laptop computer, then it may be easier to bring that close to the TGR-3. Otherwise, you need to disconnect the TGR-3 and move it close to your computer.
5. Connect the TGR-3 RS-232 port to the corresponding serial port on your computer.
6. Turn on the TGR-3 and your computer.
7. Find the file you downloaded in step 2, and run the program.
8. In AUTO mode, the software will look for an active serial connection and upload the new file. The TGR-3 display will show the status.

9. When the file transfer is complete, press the Power switch on the TGR-3 front panel. This completes the upgrade.

10. Turn off your computer and the TGR-3, and disconnect the serial cable.

External Control

The RS-232 port also allows the TGR-3 to be controlled externally by Home Theater controllers and computers.

Serial command set

Note for programmers and developers: Contact Sunfire Technical Support, or our website www.sunfire.com for a list of serial commands.

Ethernet Port

This Ethernet port is a Lantronix Xport 10/100T TCP/IP with configurable IP address, and security. It uses a simple ascii command set to control the TGR-3. An embedded webpage is included for PC control, and monitoring via TCP/IP Link.

Two LEDs in the Ethernet jack, indicate the connection status as shown:

LEFT LED		RIGHT LED	
Color	Meaning	Color	Meaning
Off	No Link	Off	No Activity
Amber	10 Mbps	Amber	Half Duplex
Green	100 Mbps	Green	Full Duplex



Troubleshooting Guide

The Sunfire TGR-3 is expertly designed and built to provide years of trouble-free performance. Most problems that occur can usually be solved by checking your setup or making sure that the audio and video components connected to the TGR-3 are on and fully operational.

The following information will help you deal with common setup problems you may experience during normal use of your unit. If problems persist, contact your Sunfire Dealer for help.

No sound from one or more speakers

- Speaker cables may have come undone. Turn off your system and check the cables, and tighten the binding posts.
- An audio cable may have an internal break.
- The volume level is low for the channels concerned. Recheck the calibration procedure (page 40).
- The Mute switch is on.
- The channel has not been turned on in the Speaker Size Menu (page 38).
- The correct surround mode is not selected. (Some DVD discs are stereo only).
- Note: In Source Direct mode, only the front left and right speakers are engaged. They must also be set to Large.

No subwoofer or poor output

- The subwoofer's amplifier is off, or its controls are set low.
- Are all speakers set Large?
- SUB is not switched on in the Speaker Size Menu (page 38).
- Recheck the calibration procedure (page 40).
- Adjust the Crossover and check Bass Management (page 41-42).
- See page 50 to find the best location for your subwoofer.

- If the bass is weak during Dolby Digital or DTS playback, check the correct audio output is selected in your DVD menu, otherwise it may just play stereo into your TGR-3 and you won't get the true LFE signal to the subwoofer.

Poor Tuning of Stations

- The antenna may be incorrectly attached.
- Station not correctly tuned in, weak or off the air.
- You can improve reception by using external antennas. Some cable TV feeds also offer FM reception.

The same AM station can be heard at different frequencies

- One wire of the AM loop antenna may not be connected.
- A loop antenna is required for AM reception, as it forms part of the front-end tuned circuit.

Full Automatic does not work

- Make sure the Fully Automatic mode is set to ON in the Main Zone Setup page (page 36) and that each input is configured for AUTO ON on their respective Setup Menu pages (page 34).

In order to automatically choose the new input source, this mode senses the following active signals: Left audio signals, Video signals, Digital signals

Note that LD or DVD players sometimes put out digital signals even when the disc is paused or stopped. Make sure that any sources are turned off when not in use.

If a source is always active, the automatic operation may return to that input as the analog audio varies. In this case, you should try and turn off any unused sources, or turn off the automatic mode.

If you are listening to a mono source, make sure it connects to a left input, or use a "Y" cord to feed both left and right inputs.

There is no automatic selection of the Phono input, Tuner, or 8-CH.

Certain inputs cannot be selected

- Check the INPUTS menu of the OSD (page 34), and make sure that the input has not been disabled in that particular Zone.

No TV picture

- Make sure that the video input of your TV monitor is connected to the Main monitor output on the TGR-3 rear panel.
- Check the VIDEO TYPE is correct in the Inputs menu of the OSD (page 34). Select the type of video input you have connected, or choose AUTO.
- Check that your TV monitor is selecting it's correct video input.
- Check the video connection from your selected source component into the TGR-3.
- Make sure that you are using the same video connections. For example, if your source is connected using S-video, then the TV monitor must also use S-video.
- If in doubt, try connecting the video output from your source directly to your TV monitor. This will help you narrow down the problem.
- Do not connect more than one type of video connection to the same input. Choose only the highest quality video type.

No Holographic Image

- It is essential that your front speakers are positioned correctly. See pages 49-50.
- The Holographic Image is most effective in 2-channel operation. It gives a more accurate perception of the position of musicians and sound effects (page 48). The results may be masked if you are using it in a surround mode.

No Tone Controls

- They will not work if you are using the 8-CH input, Source Direct mode, or in Zone 2.



No Dolby Digital, DTS playback

- See page 44
- Make sure your player's digital output is set to BITSTREAM for Dolby Digital or DTS. This is often a player's setup menu item, not the disc's menu.
- Some discs are available with a number of different options, such as Dolby Digital or Dolby Pro Logic. Make sure that you have selected the correct mode from your player's menu.
- Only digital inputs will work for these modes. Check that your player's digital output is connected to the appropriate corresponding digital input on your TGR-3.
- There is no AC-3 RF input connection for LaserDisc players. You will need an external RF demodulator.
- Look for the Dolby Digital or DTS Logo on the source program's box or sleeve.
- Check the calibration procedure from time to time. This is an excellent way of checking that all speakers are working correctly.

Noise bursts are heard when DTS encoded CDs or LDs are played

- Compressed DTS data uses the normal digital audio tracks of CDs and LDs. This analog noise may be heard in your system before the DTS digital signal is locked on, or it may appear as a background hiss.
- To reduce or prevent this noise, disconnect any analog connections to your CD or LD players. Just use the Digital connections.

No On Screen Display

- See page 30
- Press the remote's MENU button to activate the OSD. It should be present even when no video source has been selected.
- There is no pop-up text for component video connections, but there is full-page OSD.

On Screen Display flickers when engaged

- One of the features of the TGR-3 is that its OSD circuit is not in the video signal path all the time. This allows for the best possible video quality. When OSD pop up text appears, or the Main OSD menus are engaged, there can be a slight flicker as the OSD circuit is switched in. Page 37 shows how to engage or disable some of the pop up items.

Sound drops out with CD or DVD playback

- Make sure the disc is not dirty or scratched.
- Some inexpensive players and changers tend to mistrack more often, causing dropouts with an external DAC.

Remote won't Learn

- See page 28
- Make sure you are pointing the original remote into the receiving window of the Sunfire remote. This is located on the top edge of the remote.
- Try touching and holding the first button to be learned.
- Do not do the learn procedure in bright lighting or sunlight.
- Make sure the Sunfire remote is correctly in its LEARN mode.
- Try varying the distance between the remotes from 1 to 2 inches, and see if the learn procedure improves.

Remote will not work

- See pages 25-29
- Make sure the batteries are not dead, or installed incorrectly.
- Make sure the remote is set on the correct device display for the component you are trying to control.
- Make sure that the buttons have not been erased or learned over.
- Make sure that the TGR-3 front panel receiver window is not obstructed.

- Check that the front or rear IR receivers have not been turned off in the OSD CONTROL menu.

Zone 2 does not work

- See page 47
- Zone 2 is set "disabled" from the factory, so you must use the OSD Zone 2 menu on page 36 to enable it when you are ready to use it. This enables Zone 2, but it does not turn it on.
- Once Zone 2 is enabled, use the remote control's Zone 2 device button, followed by the Power button to turn Zone 2 on. Alternatively, press the front panel Zone 2 button, then the main Power button.
- The front panel (left hand side) Zone 2 Power light will be on when the zone is active (i.e. engaged and on). The Zone 2 Adjust light turns on when the zone is being adjusted. For example, if you turn Zone 2 on with the remote, and adjust the volume, Zone 2's volume changes, and the Zone 2 Adjust light will be on.
- Make sure that the TGR-3's Aux Channel outputs have been set to play Zone 2 and not surround back, or side-axis speakers (see page 41 under the OSD Amplifier Menu).

Zone 2 does not play digital inputs

Zone 2 can play analog sources independent of what is playing in the Main Zone. It **cannot** play from a digital-only source **unless** that input is selected and playing in the Main Zone. To play a source such as a DVD player in Zone 2 independent of the Main Zone, make sure you connect the player's L/R analog audio output to the TGR-3.

TGR-3 does not respond to any controls

- Unplug AC power momentarily, and press Power to turn back on
- If this does not work, try the reset procedure on the next page.



"Protect" shows in the display

The TGR-3 has thermal and short-circuit protection circuits. If the amplifier internal temperature is high, a quiet fan will engage and start to cool things down. If the temperature increases further, the TGR-3 will go into a standby mode and "Protect" will appear in the display. When it cools, the TGR-3 will turn back on.

If the TGR-3 goes into protect mode often, check the following:

- Each speaker's average impedance is not less than 4 ohms.
- The TGR-3 has good ventilation, none of its vents are covered.
- Try setting all the speakers to Small, and let your subwoofers handle the heavy bass.
- Check that the amplifier power output is a good match for your speakers. If your speakers are inefficient, consider using an external power amplifier.

Reset procedure

The TGR-3 is a microprocessor controlled device of great complexity. Occasional power fluctuations and spikes may cause the TGR-3 to "lock up" or act strangely. Often times a software problem may be resolved by completely powering off the unit, waiting 30 seconds and then plugging the unit back in. Try this method first before using the Full Reset procedure described below as follows:



Warning: the TGR-3 will be reset to the factory defaults, and will clear all memory. All your stored OSD settings and Tuner presets will be erased.

- On page 57, write down your calibration settings, input settings, Tuner presets, and any other settings you have made.
- Press the power button to turn the unit off, or turn it off from the wall for a moment.
- Press and continue to hold down the front panel Power button and the Tone DOWN button at the

same time.

- The TGR-3 will power on and cycle through the display. Keep holding the buttons down until "Resetting to Factory Defaults" appears in the front panel display
- When the TGR-3 has been reset, it will shut off.
- Turn the TGR-3 back on and it will go to the default screen. It has now been reset.
- If the TGR-3 has to be reset regularly, you should invest in a good quality AC line conditioner.

Updating firmware problems

- See page 51
- If you have a Palm Pilot™ or similar device with "HotSync™" or its equivalent, you may need to disable this software before proceeding. This software 'seizes' control of a serial port on your machine and prevents the Sunfire software from accessing that port. Use another port or disable HotSync.
- Check that the serial cable is connected correctly between the TGR-3 and your computer's serial port.

A Hum is heard in your speakers

This problem is more than likely caused by a "ground loop" in your system, rather than a fault in the TGR-3. Follow these steps to isolate the main cause of the hum, there may even be more than one.

- Remember to turn off all components in your system, including the TGR-3, before disconnecting or connecting any cables.
- Disconnect the following items in order, and check each time if the hum has gone away:
- Disconnect all cables which come from outside the room, such as cable TV, satellite TV, or roof top antennas. Make sure that they are disconnected where they first enter the room, so they are making no connection to the TGR-3 or the TV, or any other component. If the hum is caused by the cable TV line, then you will need a "ground loop

isolator." This is an inexpensive device fitted in line with the coaxial cable feed. Contact your cable company or your Sunfire Dealer for assistance.

- Disconnect all connections from the TGR-3 to your TV.
- Disconnect any component which has a grounded power cord.
- If the hum persists, disconnect all the source components one at a time from the back of the TGR-3, until you identify the problem.
- Ground loop isolators are available for audio lines and video. Ask your Sunfire Dealer for assistance.
- Try moving the speaker cables away from any power cords. Try just one speaker, connecting it to different channels and see if an amplifier channel is bad.
- If you are still having a problem, Sunfire's dealers and technical support staff will assist you.

Other causes of noise

- Speaker noise may also be caused by interference or noise on your AC line. Make sure there are no large appliances sharing the line, or halogen lamps or light-dimming Triac devices.
- Try connecting your system to another AC socket on a separate line.
- If the hum is heard from within the TGR-3 and not through the speakers, this may also be caused by interference on the AC or DC lines. The power transformers may turn this interference into an audible noise. Internal hum can be made worse by a shelf or cabinet resonating, so try moving the TGR-3 to another shelf.
- Try moving your components further away from the TV, especially if you ever notice the screen has changed color in the area closest to the component.
- If you have very high efficiency speakers, these may show up noise which other speakers may not.



Audio Components

ADC 007
Adcom 082, 092, 225, 161, 269
Aiwa 018, 104, 170, 202, 203, 213, 211, 188
Akai 138, 189
AMC 125, 126, 167, 128, 258, 281, 282
Amend 054
AMX 196
Angstrom 142
Arcam 141
Audio Access 147
Audio Alchemy 135
Audio Design 194, 221, 011
Audio Ease 021, 196, 207
Audio File 071
Audio Matrix 167
Audio Source 273
Audio Technica 134
B&K 096, 097
Bose 070, 170, 224
Bryston 023
Carver 006, 028, 061, 071, 201, 214, 226, 180, 185, 022, 029, 077, 284
Casio 076
Chiro 140
Cinema Sound 034, 134
Citation 148, 272
Clarion 026
Curtis Mathes 076
Denon 002, 034, 109, 215, 229, 230, 027, 037, 234, 259
Eiger 149
Elan 057
Enlightened Audio 099, 098
Fisher 047, 214, 180, 182
Fosgate 062, 231
GE 056, 260
Goldstar 008
Hafler 174
Harman/Kardon 231, 233, 254, 153, 154, 118, 121, 227, 277
Hitachi 020
Inkel 197
JBL 263
JC Penny
Jeff Rowland 206
Jensen 058
JVC 240, 163, 191, 114, 266, 279
Kenwood 026, 066, 145, 146, 181, 190, 197, 192, 182, 199, 151, 222, 180, 005, 280
Kinergetics 220, 140
Koss 216
Krell 150, 072
Kyocera 007
Lexicon 120, 235, 236, 237
Linn 124
Luxman 137, 139, 052, 1654, 115, 004, 009
LXI 076, 056
Magnavox 086, 164, 152, 208
Marantz 006, 028, 031, 040, 063, 185, 186, 251, 265
McIntosh 238
MCS 076
Meridian 100, 012, 013
Mitsubishi 242, 243, 204
Mondial 157, 158, 042, 043, 081, 112
Myryad 276
NAD 186, 113, 283
Nakamichi 111, 244, 245, 172, 183
NEC 176
Onkyo 017, 046, 064, 107, 108, 187, 079, 080, 090, 179, 209, 270, 275
Optimus 026, 041, 138

Panasonic 032, 195, 219, 177
Parasound 129, 130, 132, 261
Phast 196
Philips 249, 250, 251, 063
Pioneer 014, 033, 039, 044, 045, 050, 069, 159, 168, 116, 035, 079, 198
Proceed 144, 268
RCA 010, 048, 117, 156, 067
Realistic 019, 056, 073, 075, 095
Revox 162
Rotel 074, 083, 085
Samsung 016
Sansui 040, 048, 110, 119, 065, 228
Sanyo 047, 059
Scott 019, 091
Sears 076
Sharp 026, 094, 131, 175, 181
Sherwood 024, 048, 055, 102, 103, 105, 106, 051, 030
Sony 018, 093, 223, 247, 248, 160, 166, 015, 101, 184, 218, 271
Soundesign 036
Soundstream 084, 088
SSI 068
Sumo 171
Sunfire TGI 329
Sunfire TGII-IV, TGR-3 001
Taekwang 138
Teac 005, 019, 049, 111, 212, 217
Technics 122, 176, 193, 219, 178, 177, 200, 257, 262
Theta Digital 136
Toshiba 060, 087, 198, 278
Wards 180
Yamaha 026, 253, 169, 067, 173, 205, 264, 232, 089, 264, 274, 285
Zenith 143, 210

Aux (Lighting, Switches, TiVo, Etc.)

3M 152
Aiwa 164
Archer 155
Auton 191
DMX 156
Draper Screen 204
Dwin 080
Everquest 206
Extron 151
Faroudja 184
Fuji 209
Jerrold 153
JVC 185
Kenwood 185
Lite-Touch 208
Lutron 077, 158, 159
Lutron 077, 158, 159
Makita 186, 201
Mindpath 205
Niles 160, 187
NSM 161
Piano Disc Plus 085
Philips 090
Polk Audio 162
Replay 075
Russound 081
Scientific Atlanta 156, 163
Sima 082
Solo Electronics 207
Somfy 078, 079
Sony 104, 164, 165, 166
Starcom 153
Turboscan 167
Velodyne 203
X-10 093, 183

Xantech 168, 169, 170, 171, 172, 188, 189

Cable Boxes

ABC 103, 003, 004, 039, 042, 046, 053
Americast 099
Antronix 014
Archer 005, 007, 014
Bell South 099
Centurion 092
Century 007
Citizen 007
Combano 080, 081
Comsat 074
Comtronics 030
Digicable 101
Eagle 020, 030, 040
Eastern 057, 066
Echostar 106
Electricord 032
Gemini 008, 054
General Electric 072
General Instruments 103, 074, 104
GNC 099
Golden Channel 030
Hamlin 049, 050, 055
Hitachi 103, 055
Jerrold 013, 002, 003, 004, 008, 009, 010, 069, 074
Magnavox 010, 012, 064, 079, 095, 094
Media One 107
Memorex 052
Mitsubishi 102
Lutron 077, 158, 159
Makita 186, 201
Mindpath 205
Niles 160, 187
NSM 161
Piano Disc Plus 085
Philips 090
Polk Audio 162
Replay 075
Russound 081
Scientific Atlanta 156, 163
Sima 082
Solo Electronics 207
Somfy 078, 079
Sony 104, 164, 165, 166
Starcom 153
Turboscan 167
Velodyne 203
X-10 093, 183
Xantech 168, 169, 170, 171, 172, 188, 189

CD Players

Adcom 062, 042
Aiwa 059, 065, 088, 089, 105, 122, 170, 187
Akai 085, 195, 202
AMC 231, 232
Amend 118
Arcam 238
Audio Access 119, 147
Audio Ease 165
Audio Technica 046
BSR 037, 057
California Audio 103, 008
Capetronic 063
Carrera 057, 080
Carver 185, 041, 044, 050, 086, 107, 130, 134, 135, 138, 139, 203, 204, 167
Casio 111, 182
Clarinet 182
Creek 159
Crown 035
Denon 002, 123
Emerson 042, 069, 102

Fisher 050, 185, 134, 008
Fraba 111
Genexxa 010, 069, 102
Goldstar 010, 069, 102
Haitai 093
Harman/Kardon 018, 033, 047, 208
Hitachi 042, 175
Inkel 130, 143, 144
JC Penny 014, 061, 092, 141
Jensen 158
JVC 004, 022, 136, 163, 213, 214, 242, 243
Kenwood 185, 007, 023, 055, 071, 072, 142, 137
Koss 061
Krell 241
Kyocera 005
Lotte 102
Luxman 011, 028, 070, 076
LXI 059
Magnavox 044, 107
Marantz 027, 041, 044, 051, 077, 107, 209
McIntosh 212
MCS 014, 073, 092
Memorex 010
Mission 044, 107
Mitsubishi 179
Mitsumi 153
Modulaire 182
Mondial 147
Myryad 244
NAD 006, 005, 067, 178
Nakamichi 217, 218, 219, 095
NEC 014, 062
Nikko 046
NSM 044, 107
Onkyo 030, 038, 039, 168, 169
Optimus 010, 050, 057, 058, 081, 082, 083, 085, 093, 195
Panasonic 103, 201, 172, 008, 068
Parasound 233
Philips 041, 044
Pioneer 010, 020, 025, 056, 174, 175, 176
Proceed 239
Proton 044, 107, 228
Quasar 103, 008
Radio Shack 182
RCA 017, 042, 150
Realistic 042, 050, 051, 102, 181, 182, 187
Rotel 044, 107, 161, 178, 250
SAE 044, 107
Sansui 044, 069, 107, 128, 171, 190, 125
Sanyo 050
Scott 069, 102
Sharp 026, 031, 051, 066
Sherwood 003, 019, 051, 096, 112, 115, 119, 166
Signature 033
Sony 048, 081, 097, 126, 133, 177, 225, 226, 164
Soundesign 251
Sumo 155
Sylvania 044, 107
Symphonic 052, 181
Taekwang 195, 085
Tandy 010
Teac 015, 034, 036, 051, 052, 101, 131, 140, 079
Technics 060, 103, 200, 172, 184, 008, 068
Techwood 076
Theta Digital 234, 235
Toshiba 006, 067, 091, 160, 148
Vector Research 080
Victor 004, 022, 114, 124
Wards 185, 033
Yamaha 024, 046, 054, 186, 183, 245
Yorx 182

DVD Players

Apex Digital 087
Denon 007, 080
GE 026, 027
Harman/Kardon 084
JVC 012
LG 091, 057, 074
Magnavox 066
Marantz 083
Mitsubishi 017
NAD 088
Onkyo 076, 035
Panasonic 021, 042
Philips 066
Pioneer 023, 092
Proceed 086
Proscan 026, 027
RCA 026, 027
Samsung 056, 070
Sharp 094
Sony 033
Theta Digital 032
Thomson 026, 027
Toshiba 035, 034
Yamaha 042, 089
Zenith 057, 074, 091

LaserDisc Players (Use with DVD)

Denon 206, 207
Funai 120
Kenwood 152, 013
Magnavox 032, 121
Marantz 211
Mitsubishi 121
NAD 121
Optimus 049, 013
Panasonic 113
Philips 032
Pioneer 106, 117, 121
Radio Shack 120
RCA 002
Realistic 049
Runco 127
Sanyo 075
Sharp 152, 013
Sony 053, 110
Technics 113
Theta Digital 032
Toshiba 152, 106
Yamaha 043, 129

Satellite/DSS Receivers

Alphastar 123
Amplica 050
Birdview 129, 113, 051, 126
BSR 053
Capetronics 053
Channel Master 013, 014, 015, 018, 036, 055
Chaparral 008, 009, 012, 077
Citoh 054
Curtis Mathes 050
Drake 005, 006, 007, 010, 011, 112, 116, 141, 052
DX Antenna 024, 046, 056, 076
Echostar 038, 040, 057, 058, 093, 094, 095, 096, 097, 098, 099, 100, 122
Electrohome 089
Eurosats 114
Fujitsu 017, 021, 022, 027, 133, 134
General Electric 151, 106, 150
General Instruments 003, 004, 016, 029, 031, 059, 101, 148

**more Satellite/DSS receivers:**

Hitachi 139, 140
 Home Cable 080, 044, 029
 Houston Tracker 033, 037, 039, 104, 057, 051
 Hughes 068, 154
 Hytek 053
 Hyundai 149
 ICR 023
 Janiel 060, 147
 Kathrein 108
 Legend 057
 Lutron 132
 Luxor 144, 062
 Macom 010, 059, 063, 064, 065
 Memorex 057
 Nextwave 028, 124, 125
 Norsat 069, 070
 Pace 143
 Panasonic 142, 060
 Pansat 121
 Personal Cable 117
 Philips 071, 152, 153
 PL 023, 026
 President 019, 102
 Primestar 110, 030
 Prosat 072
 Proscan 151, 106, 150
 RCA 151, 106, 150
 Realistic 043, 074
 Samsung 123
 Satellite Service 028, 035, 047, 085
 Sony 103
 Starcast 041
 Superguide 020, 124, 125
 Teecom 023, 026, 075, 087, 088, 090, 107, 130, 137
 Toshiba 002, 127
 Town & Country 023, 026
 Uniden 016, 025, 042, 043, 044, 045, 048, 049, 078, 079, 080, 086, 101, 135, 136
 Viewstar 115
 Winegard 128, 146
 Zenith 081, 082, 083, 084, 091, 120

Tape Decks

Aiwa 015, 071, 100, 114
 Carver 006, 008, 027, 024, 036
 Denon 105, 227, 229
 Fisher 064
 Goldstar 011
 Harman/Kardon 233
 JVC 106, 116, 239, 240
 Kenwood 005, 013, 023, 026, 064, 145, 146, 181, 190
 Linn 124
 Luxman 035, 137, 139
 Magnavox 027
 Marantz 014, 027, 056, 065, 087
 McIntosh 238
 Mitsubishi 242, 243
 NAD 029, 048
 Nakamichi 244, 245, 025
 Onkyo 002, 012, 016, 017, 018, 019, 115
 Optimus 026, 054, 055
 Panasonic 007, 010, 032, 088, 195
 Philips 027, 087
 Pioneer 003, 039, 047, 050, 066, 098, 222
 Quasar 007, 088
 Sansui 027, 113, 119, 224
 Sharp 026, 057, 131, 175, 181
 Sherwood 038, 004, 028, 030, 033, 034
 Sony 020, 022, 052, 084, 089

Teac 009, 059, 212
 Technics 007, 010, 076, 088, 109, 122, 193
 Toshiba 112
 Victor 106
 Yamaha 021, 026, 031, 067, 040

Televisions

Admiral 072, 081, 161, 160
 Akai 197, 146
 Amark 112, 143
 Ampro 073, 167, 157, 183
 Amstrad 052
 Anam 043, 054, 056, 080, 112, 131
 AOC 197, 004, 112, 058
 Audiovox 076
 Blaupunkt 088
 Cairn 201
 Candle 197, 002, 003, 004
 Capehart 058
 Centronic 043
 Citizen 197, 002, 003, 004, 043, 101, 103, 143
 Classic 043
 Concerto 004
 Contec 043, 050, 051
 Coronado 143
 Craig 043, 054
 Crown 043, 143
 Curtis Mathes 197, 101, 004, 143
 CXC 043
 Daewoo 004, 016, 043, 004, 076, 103, 114, 125, 127, 143
 Dayton 004, 143
 Dwin 117
 Dynasty 043
 Dynatech 062
 Eiki 187
 Electrohome 024, 076, 143, 196
 Emerson 197, 004, 005, 028, 043, 047, 048, 050, 051, 076, 096, 143, 151, 153, 154, 155
 Fisher 007, 057
 Fujitsu 198
 Funai 028, 043
 Futuretech 043
 GE 197, 008, 009, 034, 056, 073, 074, 130, 144, 155, 160, 161, 165, 004, 091, 157, 183
 Goldstar 004, 102, 106, 112, 113, 116, 119, 127, 143
 Hall Mark 004
 Hitachi 004, 009, 010, 011, 012, 023, 075, 143, 158, 163, 166, 072
 Infinity 164
 JBL 164
 JC Penny 197, 004, 008, 009, 024, 030, 065, 101, 143, 156, 160
 Jensen 013
 JVC 034, 038, 070, 083, 154, 199
 KEC 043
 Kenwood 197, 070
 Kloss 002, 059
 KMC 143
 KTV 197, 043, 143, 154
 Lodgenet 072
 Logik 072
 Luxman 004
 LXI 166, 007, 015, 052, 081, 160, 164
 Magnavox 197, 003, 004, 022, 059, 060, 061, 063, 064, 127, 160, 164, 094

Marantz 197, 164
 Matsui 164
 Memorex 007, 072, 004
 Metz 088
 MGA 197, 004, 024, 028, 042
 Minerva 088
 Mitsubishi 004, 024, 028, 040, 042, 109, 124, 146, 191
 MTC 197, 004, 062, 101
 NAD 015, 025
 NEC 132, 130, 134, 197, 040, 016, 024, 056, 019
 Nikei 043
 Onking 043
 Onwa 043
 Optonica 019, 081
 Orion 096
 Panasonic 034, 056, 080, 092, 164
 Philco 197, 003, 024, 056, 059, 060, 063, 064, 164, 004
 Philips 197, 003, 004, 005, 038, 059, 093, 164, 127
 Pioneer 197, 018, 023, 025, 116, 135, 190
 Portland 004, 143
 Proscan 144, 160, 161, 165, 167
 Proton 004, 058, 131, 143, 171, 173, 193
 Quasar 034, 056, 092
 Radio Shack 019, 043, 143, 004, 127
 RCA 160, 161, 165, 065, 156, 144, 197, 004, 023, 024, 056, 074, 152
 Realistic 007, 019, 043, 047
 Roctec 186
 Runco 168, 169, 178, 179, 180, 181, 182, 183, 073, 157
 Sampo 197, 058, 004, 202
 Samsung 004, 050, 089, 101, 105, 127, 143, 160
 Sanyo 166, 007, 020, 053, 057, 082, 187
 Scott 004, 028, 043, 048, 143
 Sears 015, 030, 003, 007, 028, 057, 143, 094, 160, 080, 165, 166
 Seleco 189, 200
 Sharp 170, 081, 019, 028, 029, 014, 004, 022, 143, 175
 Siemens 088
 Signature 072
 Sony 070, 085, 139, 147, 126, 185, 194
 Soundesign 004, 028, 003, 043
 Spectricon 112
 SSS 004, 043
 Supre Macy 002
 Sylvania 197, 003, 059, 060, 063, 064, 164, 044, 160, 127
 Tandy 081
 Tatung 056, 062
 Technics 034, 080
 Techwood 004
 Teknika 002, 003, 004, 024, 028, 043, 072, 101, 143
 Telefunken 037, 046, 086, 087
 Telerent 072
 Tera 172
 TMK 004
 Toshiba 007, 015, 030, 040, 062, 101, 138
 Totevision 143
 Universal 008, 009
 Video Concepts 146
 Vidikron 174, 184, 188, 192
 Vidtech 994
 Wards 004, 008, 009, 019, 028, 060, 061, 063, 064, 072, 074, 143, 164, 034
 Westing House 076

Yamaha 197, 004
 York 004
 Yupiteru 043
 Zenith 072, 073, 095, 103, 157, 183
 Zonda 112

VCRs

Aiwa 034, 181
 Akai 016, 043, 046, 124, 125, 142, 146
 Ampro 072
 Anam 031
 Audio Dynamics 012, 023, 039, 043
 Brooksonic 035, 037, 129
 Canon 028, 031
 Capehart 108
 Craig 003, 040, 135
 Curtis Mathes 031, 041
 Daewoo 005, 007, 010, 065, 108, 110, 111, 112, 116, 117, 119
 Dayton 108
 DBX 012, 023, 039, 043
 Dynatech 034, 053
 Electrohome 059
 Emerson 006, 017, 025, 027, 029, 031, 034, 035, 036, 037, 046, 101, 129, 131, 138, 153, 162, 116
 Fisher 003, 008, 009, 010
 Funai 034
 GE 031, 063, 072, 107, 109, 144, 147
 Go Video 132, 136, 155, 040, 115
 Goldstar 012, 013, 020, 101, 106, 114, 123
 Harman/Kardon 014, 045
 Hitachi 004, 018, 026, 034, 043, 063, 137, 150, 160, 013
 InstantReplay 031
 JCL 031
 JC Penney 012, 013, 015, 040, 066, 101
 Jensen 043
 JVC 012, 031, 043, 048, 050, 055, 060, 130, 150, 152
 Kenwood 014, 048, 034, 106
 Lloyd 034
 LXI 003, 009, 017, 034, 106
 Magin 040
 Magnavox 031, 034, 041, 067, 068, 156, 164
 Marantz 012, 031, 067, 069
 Marta 101
 Matsui 027, 030
 MEI 031
 Memorex 003, 010, 014, 031, 034, 053, 072, 101, 102, 134, 139
 MGA 045, 046, 059
 Minolta 013, 020
 Mitsubishi 013, 020, 045, 046, 051, 059, 061, 142, 151, 049
 MTC 034, 040
 Multitech 024, 034
 NEC 012, 023, 039, 043, 048
 Nordmende 043
 Optonica 053, 054
 Orion 025
 Panasonic 066, 070, 083, 113, 140, 145, 157, 163, 074
 Pentax 013, 020, 031, 063
 Philco 031, 034, 067
 Philips 031, 034, 054, 067, 071, 101
 Pilot 101
 Pioneer 013, 021, 048
 Portland 108
 Pulsar 072
 Quartz 002, 014
 Quasar 066, 145, 075
 Radio Shack 123
 RCA 013, 020, 041, 107, 109, 140, 144, 145, 147, 034, 040, 158
 Realistic 003, 008, 010, 014, 031, 034, 040, 053, 054, 101
 Rico 058
 Runco 148
 Salora 014
 Samsung 032, 040, 066, 102, 104, 107, 109, 112, 113, 115, 120, 122, 125
 Sansui 022, 043, 048, 135
 Sanyo 003, 007, 010, 014, 134, 102
 Scott 017, 037, 112, 129, 131
 Sears 003, 008, 009, 010, 013, 014, 081, 101, 017, 073, 112
 Sharp 031, 054, 149, 159, 165
 Shintom 024
 Signature 034
 Sony 003, 031, 052, 056, 057, 058, 076, 077, 078, 149, 154
 Soundesign 034
 STS 013
 Sylvania 031, 034, 059, 067
 Symphonic 034
 Tandy 010, 034
 Tatung 039, 043
 Teac 034, 039, 043
 Technics 031, 070
 Teknika 019, 031, 034, 101
 Thomas 034
 TMK 006
 Toshiba 008, 013, 042, 047, 059, 079, 082, 112, 131, 081
 Totevision 040, 101
 Unitech 040
 Vector Research 012
 Victor 048
 Video Concepts 012, 034, 046, 141
 Videosonic 040
 Wards 003, 013, 017, 024, 031, 034, 040, 053, 054, 131
 Yamaha 012, 034, 039, 043
 Zenith 034, 048, 056, 058, 072, 080, 101



Favorite Settings Use this page to record some of your favorite OSD settings and system details.

Tone Settings (page 32)

TONE	LEVEL dB
BASS	
TREBLE	

Zone Settings (page 36)

MAIN ZONE	SELECTION
POWERUP SOURCE	
POWERUP VOLUME MODE	
POWERUP VOLUME	
MAXIMUM VOLUME	

ZONE 2	SELECTION
ZONE 2 SYSTEM	
BALANCE	
POWERUP SOURCE	
POWERUP VOLUME MODE	
POWERUP VOLUME	
MAXIMUM VOLUME	

Mode Settings (page 33)

MODES	SELECTION
DOLBY/DTS DYNAMIC RANGE	
PRO LOGIC II MODE	
PRO LOGIC II CENTER WIDTH	II IIx
PRO LOGIC II PANORAMA	II IIx
PRO LOGIC II DIMENSION	II IIx
DTS LFE	
DTS NEO:6	
JAZZ CLUB AMBIANCE	

Video Settings (page 37)

VIDEO	SELECTION
OSD VOL POP-UP	
OSD SOURCE POP-UP	
OSD MODE POP-UP	
VIDEO DEFAULT	
VID2/MON2	
VIDEO DELAY	

Control Settings (page 37)

CONTROL	ON / OFF
RS-232	
DIG CONTROL	
LAN MODE	
REAR MAIN IR	
REAR ZONE 2 IR	
FRONT PANEL IR	
BAUDRATE	

Input Settings (page 34)

INPUT	NAME	GAIN TRIM dB	MAIN ZONE	FULL AUTO	VIDEO TYPE	TRIG. RELAY	ZONE 2	MAKE/MODEL	REMOTE CODES	NORMAL VOLUME
DVD										
CD										
SAT										
VID1										
VID2										
VCR										
TUNER										
TAPE										
PHONO										
8 CH										

Speaker Settings (page 38-40)

SPEAKER	CALIBRATION LEVEL dB	TRIM LEVEL dB	DISTANCE (FEET)	SIZE (LARGE/SMALL/OFF)	MAKE/MODEL
LEFT MAIN					
CENTER					
RIGHT MAIN					
RIGHT SURROUND					
R SURROUND BACK					
L SURROUND BACK					
LEFT SURROUND					
SUBWOOFER					

LEFT-RIGHT CROSSOVER FREQUENCY	
CENTER/SURROUND CROSSOVER FREQUENCY	



Specifications

Power Output

Front: **200 W + 200 W**
(8 ohms, 1 kHz, < 0.5 % THD)

Center: **200 W**
(8 ohms, 1 kHz, < 0.5 % THD)

Surround: **200 W + 200 W**
(8 ohms, 1 kHz, < 0.5 % THD)

Surround Back: **200 W + 200 W**
(8 ohms, 1 kHz, < 0.5 % THD)

Sensitivity
(for 200 W output): 355 mV

Protection
Thermal and short circuit

Minimum Impedance:
4 ohms average

Line-Level Outputs

Sensitivity
(for 0.5 V output): 125 mV
Phono: 1.6 mV

Frequency response:
20 Hz-20 kHz +/- 0.5 dB

Signal to Noise
(relative to 2V out):
Analog 97 dB
Digital 105 dB

Distortion (THD): < 0.03%

Separation (at 1 kHz): 70 dB

Tone Control:
Bass: +/- 10 dB
Treble: +/- 10 dB

Frequency Response:
All but subwoofer:
(Large): 20 Hz-20 kHz
Sub: 20-160 Hz
(crossover set to 160 Hz)
(The Sub plays the bass from the other channels using Bass Management)

Delay adjustment
Center: 0-25 ms
Rear: 0-25 ms
(delay adjustment is automatic when the speaker distance is entered in feet)

Video Section

Video inputs/outputs: 1 Vp-p
75 ohms

Bandwidth

Component: 100 MHz, -1.5 dB

Composite: 6 MHz, -2 dB

S-video: 18 MHz, -1.5 dB

Sunfire Universal Video
Composite→S→Component and
S→Component
(Transcoder/upconverter is fully automatic)

Television Broadcast Standard
US: NTSC only
Export: PAL-BGIIH only
HDMI switcher max resolution: 1080i

FM Tuner Section

FM range: 87.5-108 MHz
0.2 MHz steps
(0.05 MHz for some export models)

Usable sensitivity (Mono):
1.6 uV (75 ohms)
15.2 dBf (75 kHz
DEV, 30 dB)

50dB quieting sensitivity (Stereo):
31.6 uV (75 ohms)
41.2 dBf

Audio output frequency range:
30 Hz to 15 kHz,
+5 dB, -3 dB

AM Tuner Section

AM range: 530-1710 kHz
10 kHz steps
(9 kHz for some export models)

Usable sensitivity: (30% mod.,
S/N 20 dB): 16 uV / (600 uV/m)
S/N (30% mod., 1 mV input): 48dB

Trigger Outputs

12 V Main and Zone 2 Trigger
current less than 500mA total

Main zone trigger relay contact
rating: 24 VDC 2A maximum

RS-232

9600 baud simple ascii control
(9600-8-N-1)

Ethernet

10/100T with embedded webpage
and Telnet control

Infrared Inputs

Optically Isolated
Standard 1/8" mini jacks
Standard 12V signal level

Power Requirements

US Model TGR-3:
120 VAC 50-60 Hz: 200 W
European Model TGR-3(E):
230 VAC 50-60 Hz: 200 W

Dimensions

17" Wide x 5.75" High x 16.5" Deep

Net Weight

32 lbs

Manufactured under license from Digital Theater Systems, Inc. U.S. Pat. No's. 5,451,942; 5,956,674; 5,974,380; 5,978,762; 6,487,535 and other U.S. and world-wide patents issued and pending. "DTS", "DTS-ES" and "Neo:6" are trademarks of Digital Theater Systems, Inc. Copyright 1996, 2003 Digital Theater Systems, Inc. All Rights Reserved.

Manufactured under license from Dolby Laboratories. "Dolby", "Pro Logic", "Surround EX," and the double-D symbol are trademarks of Dolby Laboratories.

© 2006 Sunfire Corporation.
All rights reserved. Sunfire Corporation reserves the right to improve its products at any time. Therefore, specifications are subject to change without notice.

Manual part number:

913-123-00 Rev A



Limited Warranty

Sunfire Corporation is proud of its products which have been built with care using advanced technology and premium component parts. Your unit has been crafted to perform properly for many years. Sunfire Corporation offers the following Warranty to you, the owner of a new Sunfire product:

The Sunfire Corporation Warranty for the TGR-3 is in effect for THREE years from the date of original retail purchase. The Sunfire Corporation Warranty covers defects in materials and workmanship. The following, however, are excluded:

- a) Damage caused during shipment.
- b) Damage caused by accident, misuse, abuse of operation contrary to the instructions specified in the Sunfire Corporation user's manual.
- c) Units where the serial number has been defaced, modified or removed.
- d) Damage resulting from modification or attempted repair by any person not authorized in writing by Sunfire Corporation.
- e) Units purchased from unauthorized dealers.

The Sunfire Corporation Warranty extends to the original owner or subsequent owner(s) during the three year warranty period so long as the original dated purchase receipt is presented whenever warranty service is required.

All implied warranties, including warranties or merchantability and fitness for particular purposes, are limited in duration to the three year length of this Warranty, unless otherwise provided by state law.

Sunfire Corporation's liability is limited to the repair or replacement, at our option, of any defective product and shall not in any event include property or any other incidental or consequential damages which may result from the failure of this product.

Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state. We suggest that you attach your purchase receipt to this Warranty and keep these in a safe place. Thank you for your choice of a Sunfire Corporation product.

Service Assistance

We suggest that you read the Limited Warranty completely to fully understand your Warranty/Service coverage.

If your Sunfire Corporation product ever requires service, write to us or call:


Sunfire Corporation
Technical Services Department
P.O. Box 1589
Snohomish, WA 98291
Tel (425) 335-4748
Fax (425) 335-4746

You will be directed to an authorized Sunfire Corporation Service Station or receive instructions to ship the unit to the factory. Please save the original shipping carton and packing materials in case shipping is required. Please do not ship Parcel Post.

NOTE: Before sending in your unit for repair, you must call Sunfire for return authorization.

Include a complete description of the problem, indicating how you have it connected, the associated equipment in your system and a copy of your purchase receipt. Initial shipping costs are not paid by Sunfire Corporation; return ground shipping costs will be prepaid if repairs were covered by the scope of this Warranty.

Sunfire™

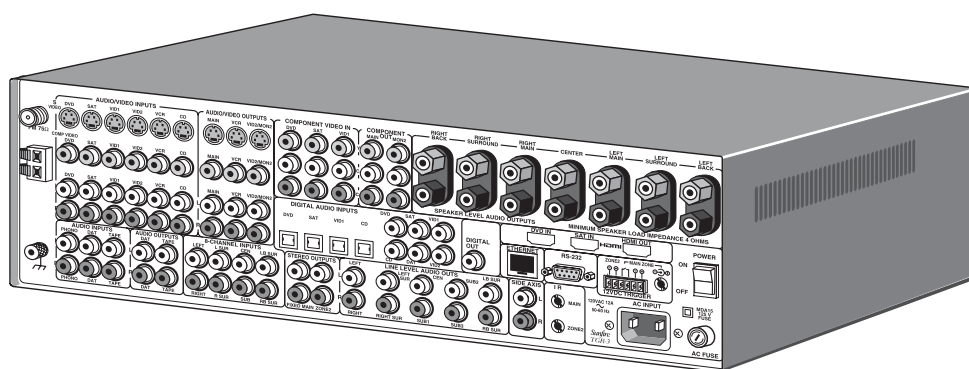

Theater Grand Receiver TGR-3

Sunfire Corporation

P.O. Box 1589

Snohomish

WA 98291

Tel (425) 335-4748

Fax (425) 335-4746

www.sunfire.com